


四绳派拿抓斗

SI SHENG PAI NA ZHUA DOU

一、结构（如图）

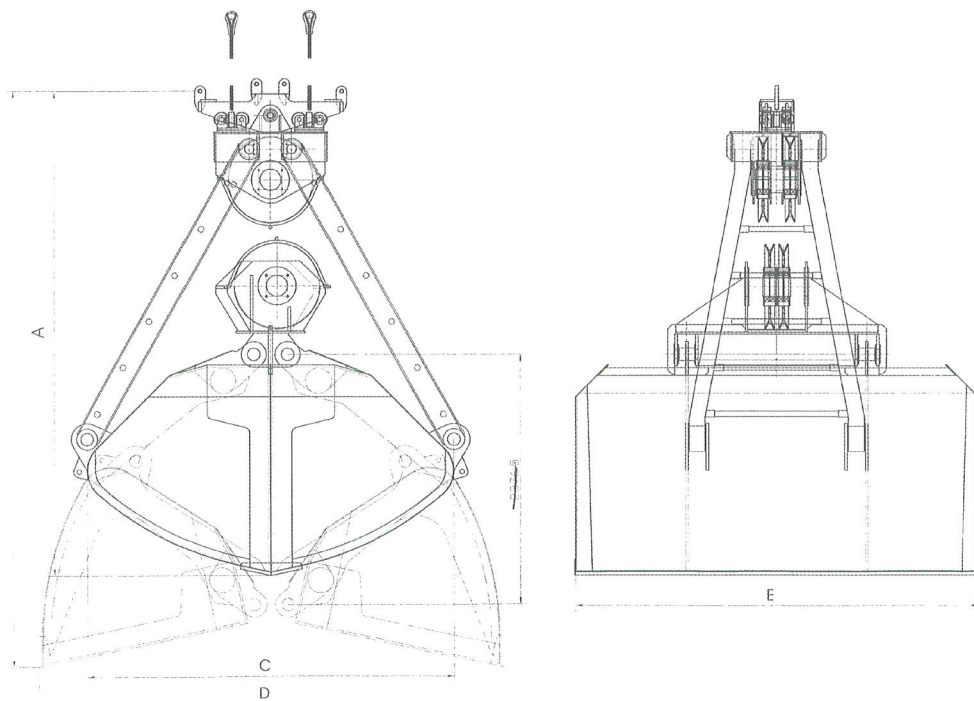

二、主要特点

结构造型合理，钢度好，抓取物料重量与抓斗自重之比达到1.5—1.92，充满度达到95—100%，主要的轴套采用轴承钢，销轴材料均为40cr，滑轮上采用耐高温轴承，外加双口橡胶油封，防尘防水可在水下使用。刃口采用耐磨合金结构钢作为刃口板，便于焊接和维修、冲击性好。

三、工作原理

同四绳工作原理一样。

四、四绳派拿抓斗技术参数表：

型号	容积 m ³	类型	物料 比重 (t/m ³)	抓取 物料重 t	滑轮 倍率	开闭 绳数	支持 绳数	钢绳 直径	坡度	配用 起重机 吨位	抓斗 总高 A(mm)	斗部 长×宽 C×E(mm)	最大张开 尺寸 D(mm)
UP0545	4.5	轻	0.63	2.8	4	2	2	14-18	45°	5	2780	2100×2565	3210
UP0658	5.8	轻	0.63	3.6	4	2	2	16-20	45°	6.3	3010	2290×2775	3470
UP0875	7.5	轻	0.63	4.7	4	2	2	18-22	45°	8	3350	2520×3010	3765
UP1095	9.5	轻	0.63	5.9	4	2	2	20-24	45°	10	3620	2720×3260	4075
UP1212	12.0	轻	0.63	7.5	4	2	2	24-26	45°	12.5	3920	2940×3510	4390
UP1615	15.0	轻	0.63	9.4	4	2	2	26-28	45°	16	4250	3170×3790	4740
UP2017	17.2	轻	0.63	10.8	4	2	2	28-32	45°	20	4630	3310×3985	4980
UP2523	23.0	轻	0.63	14.4	4	2	2	32-36	45°	25	4870	3650×4365	5460

抓斗

Grab



四绳派拿抓斗技术参数表：

型号	容积 m ³	类型	物料 比重 (t/m ³)	抓取 物料重 t	滑轮 倍率	开闭 绳数	支持 绳数	钢绳 直径	坡度	配用 起重机 吨位	抓斗 总高 A(mm)	斗部 长×宽 C×E(mm)	最大张开 尺寸 D(mm)
UP3227	27.5	轻	0.63	17.3	4	2	2	36-40	45°	32	5270	3880×4630	5790
UP4034	34.0	轻	0.63	21.4	4	2	2	40-44	45°	40	5750	4160×4970	6210
UP5043	43.5	轻	0.63	27.4	4	2	2	44-48	45°	50	6330	4500×5420	6780
UP6355	55.0	轻	0.63	34.6	4	2	2	48-52	45°	63	6880	4860×5860	7330
UP0536	3.6	轻	0.8	2.8	4	2	2	14-18	40°	5	2630	2150×2190	2920
UP0646	4.6	轻	0.8	3.6	4	2	2	16-20	40°	6.3	2870	2320×2380	3175
UP0860	6.0	轻	0.8	4.8	4	2	2	18-22	40°	8	3180	2560×2590	3455
UP1077	7.7	轻	0.8	6.1	4	2	2	20-24	40°	10	3450	2780×2805	3740
UP1297	9.7	轻	0.8	7.7	4	2	2	24-26	40°	12.5	3740	3000×3030	4040
UP1612	12.5	轻	0.8	10	4	2	2	26-28	40°	16	4060	3270×3290	4390
UP2014	14.2	轻	0.8	11.3	4	2	2	28-32	40°	20	4430	3410×3440	4590
UP2519	19.0	轻	0.8	15.2	4	2	2	32-36	40°	25	4670	3750×3790	5060
UP3222	22.5	轻	0.8	18	4	2	2	36-40	40°	32	5040	3980×4000	5340
UP4028	28.0	轻	0.8	22.4	4	2	2	40-44	40°	40	5510	4280×4290	5720
UP5035	35.5	轻	0.8	28.4	4	2	2	44-48	40°	50	6040	4620×4660	6220
UP6345	45.0	轻	0.8	36	4	2	2	48-52	40°	63	6560	5000×5030	6710
UP0530	3.0	轻	1.0	3.6	4	2	2	14-18	40°	5	2550	2030×2060	2750
UP0638	3.8	轻	1.0	3.8	4	2	2	16-20	40°	6.3	2760	2190×2230	2950
UP0849	4.9	轻	1.0	4.9	4	2	2	18-22	40°	8	3060	2400×2405	3210
UP1063	6.3	轻	1.0	6.3	4	2	2	20-24	40°	10	3320	2610×2615	3490
UP1280	8.0	轻	1.0	8.0	4	2	2	24-26	40°	12.5	3600	2830×2830	3775
UP1610	10.0	轻	1.0	10.0	4	2	2	26-28	40°	16	3900	3040×3060	4080
UP2012	12.0	轻	1.0	12.0	4	2	2	28-32	40°	20	4300	3230×3250	4340
UP2515	15.8	轻	1.0	15.8	4	2	2	32-36	40°	25	4520	3530×3570	4760
UP3218	18.8	轻	1.0	18.8	4	2	2	36-40	40°	32	4890	3750×3770	5030
UP4023	23.6	轻	1.0	23.6	4	2	2	40-44	40°	40	5350	4040×4060	5420
UP5030	30.0	轻	1.0	30.0	4	2	2	44-48	40°	50	5860	4390×4390	5860
UP6337	37.8	轻	1.0	37.8	4	2	2	48-52	40°	63	6380	4730×4750	6340
UP0525	2.5	中	1.25	3.1	4	2	2	14-18	35°	5	2470	2050×1830	2615
UP0632	3.2	中	1.25	4	4	2	2	16-20	35°	6.3	2680	2240×1970	2815
UP0841	4.1	中	1.25	5.1	4	2	2	18-22	35°	8	3000	2430×2165	3095
UP1052	5.2	中	1.25	6.5	4	2	2	20-24	35°	10	3240	2630×2330	3330
UP1265	6.5	中	1.25	8.1	4	2	2	24-26	35°	12.5	3500	2840×2510	3585
UP1683	8.3	中	1.25	10.3	4	2	2	26-28	35°	16	3810	3070×2725	3895
UP2095	9.5	中	1.25	11.8	4	2	2	28-32	35°	20	4170	3220×2845	4070
UP2512	12.5	中	1.25	15.6	4	2	2	32-36	35°	25	4350	3540×3090	4420
UP3215	15.0	中	1.25	18.7	4	2	2	36-40	35°	32	4700	3750×3310	4730
UP4019	19.5	中	1.25	24.3	4	2	2	40-44	35°	40	5210	4090×3600	5150
UP5024	24.5	中	1.25	30.6	4	2	2	44-48	35°	50	5740	4380×3940	5630
UP6331	31.0	中	1.25	38.7	4	2	2	48-52	35°	63	6200	4770×4195	6000
UP0520	2.0	中	1.6	3.2	4	2	2	14-18	30°	5	2360	2020×1675	2395
UP0626	2.6	中	1.6	4.1	4	2	2	16-20	30°	6.3	2570	2200×1825	2610
UP0833	3.3	中	1.6	5.2	4	2	2	18-22	30°	8	2880	2390×1985	2840
UP1041	4.1	中	1.6	6.5	4	2	2	20-24	30°	10	3085	2870×2125	3040

抓斗

Grab

四绳派拿抓斗技术参数表：

型号	容积 m ³	类型	物料 比重 (t/m ³)	抓取 物料重 t	滑轮 倍率	开闭 绳数	支持 绳数	钢绳 直径	坡度	配用 起重机 吨位	抓斗 总高 A(mm)	斗部 长×宽 C×E(mm)	最大张开 尺寸 D(mm)
UP1252	5.2	中	1.6	8.3	4	2	2	24-26	30°	12.5	3340	2790×2290	3270
UP1667	6.7	中	1.6	10.7	4	2	2	26-28	30°	16	3650	3020×2510	3585
UP2078	7.8	中	1.6	12.4	4	2	2	28-32	30°	20	4010	3190×2625	3750
UP2510	10.1	中	1.6	16.1	4	2	2	32-36	30°	25	4180	3470×2860	4090
UP3212	12.2	中	1.6	19.5	4	2	2	36-40	30°	32	4550	3690×3060	4370
UP4015	15.3	中	1.6	24.4	4	2	2	40-44	30°	40	4970	3990×3275	4680
UP5019	19.3	中	1.6	30.8	4	2	2	44-48	30°	50	5480	4290×3575	5110
UP6324	24.6	中	1.6	39.3	4	2	2	48-52	30°	63	5960	4650×3860	5520
UP0516	1.6	重	2.0	3.2	4	2	2	14-18	27.5°	5	2280	1290×1555	2220
UP0622	2.2	重	2.0	4.4	4	2	2	16-20	27.5°	6.3	2490	2140×1710	2440
UP0826	2.6	重	2.0	5.2	4	2	2	18-22	27.5°	8	2790	2240×1860	2660
UP1033	3.3	重	2.0	6.6	4	2	2	20-24	27.5°	10	3000	2430×2010	2870
UP1242	4.2	重	2.0	8.4	4	2	2	24-26	27.5°	12.5	3230	2660×2140	3060
UP1655	5.5	重	2.0	11	4	2	2	26-28	27.5°	16	3540	2800×2350	3360
UP2065	6.5	重	2.0	13	4	2	2	28-32	27.5°	20	3910	3060×2490	3560
UP2583	8.3	重	2.0	16.6	4	2	2	32-36	27.5°	25	4040	3320×2680	3830
UP3210	10.0	重	2.0	20	4	2	2	36-40	27.5°	32	4400	3540×2850	4070
UP4012	12.6	重	2.0	24.2	4	2	2	40-44	27.5°	40	4830	3820×3080	4400
UP5016	16	重	2.0	32	4	2	2	44-48	27.5°	50	5320	4120×3360	4800
UP6320	20.5	重	2.0	41	4	2	2	48-52	27.5°	63	5780	4480×3620	5180
UP0513	1.3	重	2.5	3.2	4	2	2	14-18	25°	5	2210	1910×1370	2110
UP0616	1.6	重	2.5	4	4	2	2	16-20	25°	6.3	2400	2040×1475	2270
UP0822	2.2	重	2.5	5.5	4	2	2	18-22	25°	8	2710	2280×1645	2530
UP1027	2.7	重	2.5	6.7	4	2	2	20-24	25°	10	2920	2430×1760	2710
UP1234	3.4	重	2.5	8.5	4	2	2	24-26	25°	12.5	3170	2630×1910	2940
UP1644	4.4	重	2.5	11	4	2	2	26-28	25°	16	3440	2870×2060	3170
UP2050	5.0	重	2.5	12.5	4	2	2	28-32	25°	20	3790	2990×2160	3330
UP2565	6.5	重	2.5	16.2	4	2	2	32-36	25°	25	3950	3250×2360	3640
UP3280	8.0	重	2.5	20	4	2	2	36-40	25°	32	4270	3500×2510	3860
UP4010	10.2	重	2.5	25.5	4	2	2	40-44	25°	40	4730	3780×2370	4200
UP5013	13.0	重	2.5	32.5	4	2	2	44-48	25°	50	5200	4110×2962	4560
UP6316	16.5	重	2.5	41.2	4	2	2	48-52	25°	63	5640	4450×3180	4890
UP0510	1.0	超重	3.2	3.2	4	2	2	14-18	22.5°	5	2160	1840×1200	2000
UP0613	1.3	超重	3.2	4.1	4	2	2	16-20	22.5°	6.3	2340	2020×1290	2150
UP0816	1.6	超重	3.2	5.1	4	2	2	18-22	22.5°	8	2620	2170×1395	2325
UP1020	2.0	超重	3.2	6.4	4	2	2	20-24	22.5°	10	2810	2330×1550	2500
UP1225	2.5	超重	3.2	8	4	2	2	26-28	22.5°	12.5	3040	2520×1610	2685
UP1663	3.3	超重	3.2	10.5	4	2	2	28-30	22.5°	16	3320	2770×1750	2920
UP2040	4.0	超重	3.2	12.8	4	2	2	30-32	22.5°	20	3690	2950×1875	3130
UP2550	5.0	超重	3.2	16	4	2	2	32-36	22.5°	25	3800	3170×2015	3360
UP3263	6.3	超重	3.2	20.1	4	2	2	36-40	22.5°	32	4180	3430×2180	3640
UP4080	8.0	超重	3.2	25.6	4	2	2	40-44	22.5°	40	4600	3700×2360	3940
UP5010	10.0	超重	3.2	32	4	2	2	44-48	22.5°	50	5030	3990×2540	4240
UP6312	12.5	超重	3.2	40	4	2	2	48-52	22.5°	63	5470	4290×2735	4560