
MH型3~20吨电动葫芦门式起重机(箱型式)

MH Type 3~20t Electric Hoist Gantry Crane(Box type)

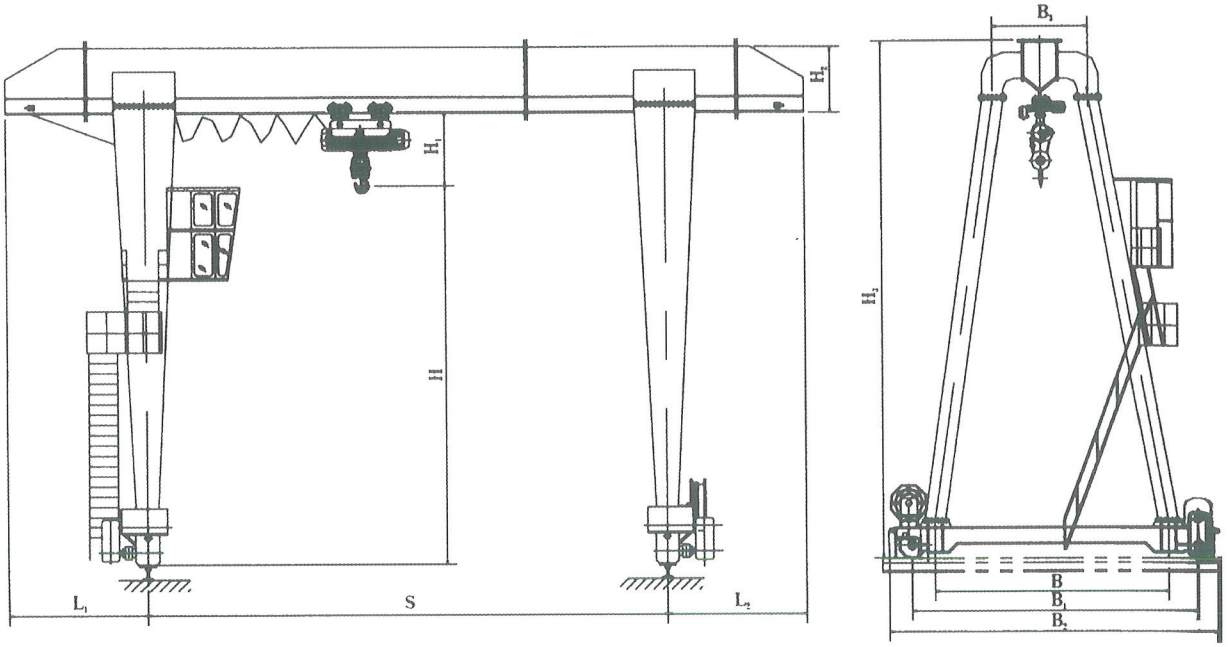

（箱型式）

简介 A Brief Introduction

MH型电动葫芦门式起重机与CD MD等型号的电动葫芦配套使用，是一种有轨运行的中小型起重机，其适用起重量3~20吨，适用跨度12~30米，工作环境-20℃~+40℃内。

本产品为一般用途起重机，多用于露天场所及仓库的装卸或抓取物料，本产品有地面操纵和室内操纵两种型式。

MH Model Electric Hoist Girder Gantry Crane is used together with CD MD Model electrichoists. It is a track travelling small and medium-sized crane. Its proper Lifting weight is 3 to 20tons. Proper span is 12 to 30 meters, its proper working temperature is-20℃ to 40℃.

This product is a regular crane widely used at open ground and warehouses to lqad, unload or grab materials. It has two controlling methods, namely ground, controlling and room controlling.

技术参数 Technological parameter

起重量 Lifting Weight			t	3			
跨度 Span			m	12	16	20	24
起升高度(m) Lifting Height			m	6 / 9			
电动葫芦 Electric Hoist	型号 Type No.			CD_1 MD_1			
	起升速度 Lifting Speed		m/min	8 0.8 / 8			
	运行速度 Travelling Speed		m/min	20			
	电动机 Motor	起升 Lifting		ZD 41-4 / 4.5 $ZDS_1$0.4 / 4.5			
		运行 Travelling		ZDY 12-4 / 0.4			
工作级别 Working class				A3			
荐用钢轨 Steel track				P24 P38			
电源 Power Supply				三相交流 380V 50HZ			
最大轮压 Max.Wheel Pressure			KN	37 / 42	40 / 46	44 / 50	48 / 54
基本尺寸 Basic Dimensions	L_1		mm	2000	3000	4000	5000
	L_2		mm	2000	3000	4000	5000
	H_1		mm	960			
	H_2		mm	650	700	800	900
	H_3		mm	7635 / 10635	7685 / 10685	7785 / 10785	7885 / 10885
	B		mm	4500 / 5500		5500 / 6500	
	B_1		mm	5000 / 6000		6000 / 7000	
	B_2		mm	5400 / 6400		6500 / 7500	
	B_3		mm	1500			

MH型3~20吨电动葫芦门式起重机(箱型式)

MH Type 3~20t Electric Hoist Gantry Crane(Box type)

技术参数 Technological parameter

起重量 Lifting Weight			t	5				
跨度 Span			m	12	16	20	24	30
起升高度(m) Lifting Height			m	6 / 9				
电动葫芦 Electric Hoist	型号 Type No.			CD_1 MD_1				
	起升速度 Lifting Speed		m/min	8 0.8 / 8				
	运行速度 Travelling Speed		m/min	20				
	电动机 Motor	起升 Lifting		$ZD_1$41-4 / 7.5 $ZDS_1$0.8 / 7.5				
		运行 Travelling		$ZDY_1$21-4 / 0.8				
工作级别 Working class				A3				
荐用钢轨 Steel Track Recommended				P24		P38		
电源 Power Supply				三相交流 380V 50HZ				
最大轮压 Max.Wheel Pressure			KN	54 / 59	62 / 67	70 / 75	78 / 83	96
基本尺寸 Basic Dimensions	L_1		mm	3000	4000	5000	6000	7500
	L_2		mm					
	H_1		mm	1160				
	H_2		mm	800	900	1000	1150	1300
	H_3		mm	760 / 10960	8060 / 11060	8160 / 11160	8310 / 11310	11460
	B		mm	4500 / 5500		5500 / 6500		
	B_1		mm	5500 / 6500		6500 / 7500		
	B_2		mm	6000 / 7000		7100 / 8100		
	B_3		mm	1500				

技术参数 Technological parameter

起重量 Lifting Weight			t	10				
跨度 Span			m	12	16	20	24	30
起升高度(m) Lifting Height			m	6 / 9				
电动葫芦 Electric Hoist	型号 Type No.			CD_1 MD_1				
	起升速度 Lifting Speed		m/min	7 0.7 / 7				
	运行速度 Travelling Speed		m/min	20				
	电动机 Motor	起升 Lifting		ZD_151-4 / 13 $ZDS_11.5$ / 4.5				
		运行 Travelling		ZDY21-4 / 0.8×2				
工作级别 Working class				A3				
荐用钢轨 Steel Track Recommended				P38		P43		
电源 Power Supply				三相交流 380V 50HZ				
最大轮压 Max.Wheel Pressure			KN	97 / 102	105 / 110	113 / 118	121 / 126	149
基本尺寸 Basic Dimensions		L_1	mm	3000	4000	5000	6000	7500
		L_2	mm					
		H_1	mm	1350				
		H_2	mm	1000	1100	1200	1300	1600
		H_3	mm	8350 / 1135	8450 / 1450	8550 / 11550	8650 / 11650	12250
		B	mm	4500 / 5500		5500 / 6500		
		B_1	mm	5500 / 6500		6500 / 7500		
		B_2	mm	6000 / 7100		7100 / 8100		
		B_3	mm	1600				

MH型3~20吨电动葫芦门式起重机(箱型式)

MH Type 3~20t Electric Hoist Gantry Crane(Box type)

技术参数 Technological parameter

起重量 Lifting Weight			t	16					
跨度 Span			m	12	16	20	24	30	
起升高度(m) Lifting Height			m	6 / 9					
电动葫芦 Electric Hoist	型号 Type No.			CD_1					
	起升速度 Lifting Speed		m/min	3.5					
	运行速度 Travelling Speed		m/min	20					
	电动机 Motor	起升 Lifting		$ZD_1 51-4 / 13$					
		运行 Travelling		$ZDY_1 21-4 / 0.8 \times 2$					
工作级别 Working class				A3					
荐用钢轨 Steel Track Recommended				P38		P43			
电源 Power Supply				三相交流 380V 50HZ					
最大轮压 Max.Wheel Pressure			KN	143 / 150	152 / 159	165 / 174	169 / 176	190	
基本尺寸 Basic Dimensions	L_1		mm	3000	4000	5000	6000		
	L_2		mm						
	H_1		mm	2300					
	H_2		mm	1100	1200	1300	1400	1600	
	H_3		mm	9500 / 12500	9600 / 12600	9700 / 12700	9800 / 12800	9900	
	B		mm	5500 / 6000		6500 / 7500		7500	
	B_1		mm	6500 / 7000		7500 / 8500		8500	
	B_2		mm	7000 / 7500		8200 / 9200		9200	
	B_3		mm	1600		1700			

技术参数 Technological parameter

起重量 Lifting Weight			t	20				
跨度 Span			m	12	16	20	24	30
起升高度(m) Lifting Height			M	6 / 9				
电动葫芦 Electric Hoist	型号 Type No.			HC				
	起升速度 Lifting Speed		m/min	3.5				
	运行速度 Travelling Speed		m/min	20				
	电动机 Motor	起升 Lifting		$ZD_1 52-4 / 18.5$				
		运行 Travelling		$ZDY_1 21-4 / 0.8 \times 4$				
荐用钢轨 Steel Track Recommended				P43		P50		
电源 Power Supply				三相交流 380V 50HZ				
最大轮压 Max. / min.			KN	198 / 206	218 / 226	232 / 240	265 / 273	302 / 310
基本尺寸 Basic Dimensions		L_1	mm	3000	4000	5000	6000	7000
		L_2	mm					
		H	mm	6000				9000
		H_1	mm	2725				
		H_2	mm	1400	1600	1800	2000	2200
		B	mm	5500 / 6000				6500 / 7500
		B_1	mm	6500 / 7000				7500 / 8500
		B_2	mm	7000 / 7500				8200 / 9200
		B_3	mm	1600				1700