

## G100 COMPONENTS 100级 索具配件

- ◆ REGULAR MARK OF G100 components from SLR
- ◇ 来自于SLR品牌的100级索具配件打字标准
- ◆ For example G100 EYE SELFLOCK HOOK 10-10
- ◇ 以100级眼型自锁钩10-10为例



### Regular mark 常规标记:

| MARK 标记           | 10                 | -10                 | WLL 4T                     | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|---------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 100<br>等级100级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |




## G100 SWIVEL SELFLOCKING HOOK WITH BEARING 100级 带轴承旋转安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for G100 chain.
- ◆ 与100级链条配合使用
- ◆ 25% stronger than G80.
- ◆ 比80级产品性能提升25%
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◆ 每件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflex crack detection
- ◆ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷漆)
- ◆ Colour code (色号): Blue (蓝色) RAL5015

- ◆ Positive lock latch is selflocking when hook is loaded.
- ◆ 在负荷下，钩子的自锁结构会自动闭合，更安全。



### SLR1072-G100 SWIVEL SELFLOCKING HOOK WITH BEARING 100级 带轴承旋转安全钩



| ITEM CODE | WEIGHT (KG) | WLL (T) | B.L (T) | A±1.5 | B±1.5 | C±2 | D±2  | E±2.5 | N±1  | H±3 | K±3 | L±5   | W±3 |
|-----------|-------------|---------|---------|-------|-------|-----|------|-------|------|-----|-----|-------|-----|
| 6-10      | 0.67        | 1.4     | 5.6     | 11.5  | 13    | 37  | 27   | 30    | 15   | 32  | 163 | 196.5 | 70  |
| 8-10      | 1.21        | 2.5     | 10      | 13    | 15    | 41  | 35.5 | 40    | 20   | 39  | 202 | 243   | 90  |
| 10-10     | 2.2         | 4       | 16      | 15.5  | 17.5  | 48  | 45   | 48    | 26   | 48  | 244 | 289   | 108 |
| 13-10     | 4.4         | 6.7     | 26.8    | 17    | 19    | 55  | 52.5 | 63    | 32.5 | 57  | 292 | 351   | 138 |
| 16-10     | 7.48        | 10      | 40      | 21.5  | 26    | 62  | 62   | 75    | 38   | 62  | 346 | 422   | 170 |
| 20-10     | 13.75       | 16      | 64      | 26.5  | 28.5  | 76  | 76   | 80    | 50   | 72  | 396 | 487   | 191 |
| 22-10     | 18.81       | 19      | 76      | 33    | 33    | 97  | 79   | 95    | 52   | 97  | 465 | 563   | 208 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。

#### Regular mark 常规标记:

| MARK 标记        | 10              | -10              | WLL 4T                  | SLR                | CE                     | 18-1              |
|----------------|-----------------|------------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 100 等级100级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |






## G100 CLEVIS SLING HOOK 100级 羊角吊钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for G100 chain
- ◇ 与100级链条配合使用
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflex crack detection
- ◇ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理) : Powder plastified ( 喷漆 )
- ◆ Colour code ( 色号 ) : Blue ( 蓝色 ) RAL5015
- ◆ With cast latch 配铸造舌片配件



### SLR1004-G100 CLEVIS SLING HOOK WITH CAST LATCH 100级 羊角吊钩 (含铸造舌片)



| ITEM CODE     | WEIGHT (KG) | WLL (T) | B.L (T) | A±0.5 | B±1 | E±1.5 | H±1  | M±2   | L±2.5 |
|---------------|-------------|---------|---------|-------|-----|-------|------|-------|-------|
| 10-SLR1004-06 | 0.33        | 1.4     | 5.6     | 7.5   | 32  | 18.5  | 21   | 68.5  | 109   |
| 10-SLR1004-08 | 0.7         | 2.5     | 10      | 9.5   | 37  | 25    | 27.5 | 88    | 134   |
| 10-SLR1004-10 | 1.3         | 4       | 16      | 12    | 48  | 28    | 33.5 | 105.5 | 161.5 |
| 10-SLR1004-13 | 2.3         | 6.7     | 26.8    | 15    | 59  | 38    | 42   | 134   | 203   |
| 10-SLR1004-16 | 3.6         | 10      | 40      | 18.5  | 70  | 44    | 50   | 160.5 | 248   |
| 10-SLR1004-20 | 7           | 16      | 64      | 25    | 85  | 52    | 56   | 190.5 | 297   |
| 10-SLR1004-22 | 12.1        | 19      | 76      | 27    | 100 | 66    | 62   | 214.5 | 326   |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。

Regular mark (常规标记) : 10-10 WLL 4 T CE SLR + BATCH NUMBER (批号)

### SP-SLR1004 - SPARE PART FOR SLR1004 (LOAD PIN) SLR1004的销轴配件



| ITEM CODE     | SIZE 规格 | ITEM CODE 货号  | SIZE 规格 |
|---------------|---------|---------------|---------|
| SP-SLR1004-6  | 6-10    | SP-SLR1004-20 | 20-10   |
| SP-SLR1004-8  | 8-10    | SP-SLR1004-22 | 22-10   |
| SP-SLR1004-10 | 10-10   |               |         |
| SP-SLR1004-13 | 13-10   |               |         |
| SP-SLR1004-16 | 16-10   |               |         |

1 SET = BLACK PIN + 2 BLACK SPRING TYPE STRAIGHT PINS 1套=发黑销轴+2个发黑弹性圆柱销




## G100 CLEVIS C TYPE HOOK 100级 C型钩

- ◆ Forged super alloy steel-Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for G100 chain
- ◇ 与100级链条配合使用
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%
- ◆ Fatigue tested at 1.5times Working Load for 20000cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnetflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ All load pins are 100% indiuivally inspected and tested
- ◇ 所有销轴进行100%的测试，确保相同的硬度品质



SLR1071-G100 CLEVIS C TYPE HOOK  
C 型钩



| ITEM CODE     | WEIGHT (Kg) | WLL (T) | BF (T) | A±0.5 | B±1  | C±3  | H±1  | L±3   | M±0.5 | E±1  |
|---------------|-------------|---------|--------|-------|------|------|------|-------|-------|------|
| 10-SLR1071-8  | 0.54        | 2.5     | 10     | 9.5   | 36.5 | 21.5 | 27.3 | 125.5 | 9.5   | 20.5 |
| 10-SLR1071-10 | 1.05        | 4       | 16     | 12.5  | 48.5 | 27   | 32.4 | 169   | 12    | 27   |
|               |             |         |        |       |      |      |      |       |       |      |
|               |             |         |        |       |      |      |      |       |       |      |
|               |             |         |        |       |      |      |      |       |       |      |
|               |             |         |        |       |      |      |      |       |       |      |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记        | 10              | -10              | WLL 4T                  | SLR                | CE                     | 18-1              |
|----------------|-----------------|------------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 100 等级100级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## G100 SELFLOCK HOOK 100级 自锁钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafix crack detection
- ◇ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理) : Powder plastified (喷塑)
- ◆ Colour code(色号) : Blue(蓝色)RAL5015

- ◆ Positive lock latch is selflocking when hook is loaded
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全



### SLR1005-G100 EYE SELFLOCK HOOK 100级 眼型自锁钩

**SLR1005**



| ITEM CODE     | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | Ø      | D      | E      | F      | R     | M       | N      | L       | H    |
|---------------|----------------|------------|------------|--------|--------|--------|--------|-------|---------|--------|---------|------|
| 10-SLR1005-06 | 0.5            | 1.4        | 5.6        | 21±1   | 43±1   | 28±2   | 31.5±2 | 110±4 | 73±2    | 15±1   | 141±4   | 11±1 |
| 10-SLR1005-07 | 0.81           | 1.9        | 7.6        | 27±1   | 51±1   | 31±2   | 34±2   | 127±4 | 81±2    | 17±1   | 162±4   | 12±1 |
| 10-SLR1005-08 | 0.9            | 2.5        | 10         | 27±1   | 51±1   | 36±3   | 40±3   | 137±4 | 90±3    | 20±1   | 175±4   | 12±1 |
| 10-SLR1005-10 | 1.5            | 4          | 16         | 34.5±2 | 64.5±2 | 45±3   | 46±3   | 170±5 | 108±3   | 26±2   | 212±5   | 15±1 |
| 10-SLR1005-13 | 2.7            | 6.7        | 26.8       | 40±2   | 80±2   | 53.6±3 | 66±4   | 209±5 | 137.5±4 | 32.5±2 | 269±5   | 20±2 |
| 10-SLR1005-16 | 5.7            | 10         | 40         | 50±3   | 104±3  | 61±4   | 75±4   | 256±6 | 170.5±4 | 38±3   | 333±6   | 27±2 |
| 10-SLR1005-20 | 7.9            | 16         | 64         | 60±3   | 124±3  | 76.5±4 | 80±5   | 277±6 | 191.5±5 | 50±3   | 368.5±6 | 30±2 |
| 10-SLR1005-22 | 11.2           | 19         | 76         | 70±3   | 139±3  | 76±4   | 104±5  | 319±8 | 205±5   | 52±3   | 417±8   | 33±2 |
| 10-SLR1005-26 | 20.5           | 26.5       | 106        | 76±3   | 154±3  | 99±4   | 107±5  | 370±8 | 251±5   | 60±3   | 489±8   | 38±2 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。

### Regular mark 常规标记:

| MARK 标记           | 10                 | -10                 | WLL 4T                     | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|---------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 100<br>等级100级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G100 SELFLOCK HOOK 100级 自锁钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for G100 chain
- ◇ 与100级链条配合使用
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 每件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理) : Powder plastified ( 喷漆 )
- ◆ Colour code(色号) : Blue(蓝色)RAL5015



- ◆ Positive lock latch is selflocking when hook is loaded
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全

### SLR1006-G100 CLEVIS SELFLOCK HOOK 100级 羊角型自锁钩

SLR1006

|  | ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A       | B       | E      | F      | R     | M     | N        | L     |
|--|---------------|----------------|------------|------------|---------|---------|--------|--------|-------|-------|----------|-------|
|  | 10-SLR1006-06 | 0.5            | 1.4        | 5.6        | 8±0.5   | 32±1.5  | 28±2   | 31.5±2 | 96±4  | 73±2  | 15±1     | 131±4 |
|  | 10-SLR1006-08 | 0.9            | 2.5        | 10         | 9.5±0.5 | 36±1.5  | 36±3   | 40±3   | 121±4 | 90±2  | 20±1     | 163±4 |
|  | 10-SLR1006-10 | 1.4            | 4          | 16         | 12±0.5  | 46±1.5  | 45±3   | 46±3   | 144±5 | 108±3 | 26±1.5   | 194±5 |
|  | 10-SLR1006-13 | 2.9            | 6.7        | 26.8       | 15±1    | 59±1.5  | 53.6±3 | 66±4   | 182±5 | 137±3 | 32.5±1.5 | 251±5 |
|  | 10-SLR1006-16 | 5.5            | 10         | 40         | 18.5±1  | 70±2    | 61±4   | 75±4   | 220±6 | 168±3 | 38±2     | 303±6 |
|  | 10-SLR1006-18 | 8.5            | 12.5       | 50         | 22±1    | 78±2    | 73±4   | 76±5   | 227±6 | 183±3 | 44±2     | 322±6 |
|  | 10-SLR1006-20 | 8.6            | 16         | 64         | 25±1.5  | 85±2    | 76.5±4 | 80±5   | 235±7 | 190±3 | 50±3     | 337±7 |
|  | 10-SLR1006-22 | 12.1           | 19         | 76         | 25.5±2  | 98±2.5  | 76±4   | 104±5  | 271±8 | 202±4 | 52±3     | 386±8 |
|  | 10-SLR1006-26 | 21.15          | 26.5       | 106        | 30±2    | 118±2.5 | 99±4   | 107±5  | 343±8 | 251±4 | 60±3     | 484±8 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。

Regular mark (常规标记) : 10-10 WLL 4 T CE SLR + BATCH NUMBER (批号)

### SP-SLR1006-SPARE PART FOR SLR1006 SLR1006的销轴配件



| ITEM CODE 货号  | SIZE 规格 | ITEM CODE 货号  | SIZE 规格 |
|---------------|---------|---------------|---------|
| SP-SLR1006-6  | 6-10    | SP-SLR1006-16 | 16-10   |
| SP-SLR1006-8  | 8-10    | SP-SLR1006-20 | 20-10   |
| SP-SLR1006-10 | 10-10   | SP-SLR1006-22 | 22-10   |
| SP-SLR1006-13 | 13-10   |               |         |



## G100 ROTATE SAFETY HOOK 100级 旋转安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
  - ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
  - ◆ Suitable for G100 chain.
  - ◇ 与100级链条配合使用
  - ◆ 25% stronger than G80.
  - ◇ 比80级产品性能提升25%
  - ◆ Individually proof test at 2.5 times Working Load Limit.
  - ◇ 逐件按工作拉力的2.5倍进行验证测试
  - ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
  - ◇ 抽样进行20000次疲劳测试
  - ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
  - ◆ 100% magnaflux crack detection
  - ◇ 100% 进行磁粉探伤
  - ◆ Surface finish (表面处理) : Powder plastified (喷漆)
  - ◆ Colour code (色号) : Blue (蓝色) RAL5015
- ◆ Positive lock latch is selflocking when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全



### SLR1007-G100 ROTATE SAFETY HOOK 100级 旋转安全钩

SLR1007

|  | ITEM CODE     | WEIGHT (KG) | WLL (T) | B.L (T) | B      | C      | Ø      | E      | F      | M       | N      | K       | L     |
|--|---------------|-------------|---------|---------|--------|--------|--------|--------|--------|---------|--------|---------|-------|
|  | 10-SLR1007-06 | 0.6         | 1.4     | 5.6     | 32.5±2 | 25.5±2 | 11.5±1 | 28±2   | 31.5±2 | 73±2    | 15±1   | 152.5±4 | 184±5 |
|  | 10-SLR1007-08 | 1.1         | 2.5     | 10      | 36±2   | 28.5±2 | 13±1   | 36±3   | 40±3   | 90±3    | 20±1   | 188±4   | 226±6 |
|  | 10-SLR1007-10 | 2           | 4       | 16      | 42±3   | 35±3   | 15.5±1 | 45±3   | 46±3   | 108±3   | 26±2   | 225.5±5 | 269±6 |
|  | 10-SLR1007-13 | 4           | 6.7     | 26.8    | 50±3   | 41±3   | 17±2   | 53.6±3 | 66±4   | 137.5±4 | 32.5±2 | 270±5   | 327±7 |
|  | 10-SLR1007-16 | 6.8         | 10      | 40      | 70±4   | 58±4   | 21.5±2 | 61±4   | 75±4   | 170.5±4 | 38±3   | 342±6   | 413±7 |
|  | 10-SLR1007-20 | 12.5        | 16      | 64      | 72±4   | 63±4   | 26±2   | 76.5±4 | 80±5   | 191.5±5 | 50±3   | 373±6   | 460±8 |
|  | 10-SLR1007-22 | 17.1        | 19      | 76      | 97±5   | 96±5   | 33±2   | 76±4   | 104±5  | 205±5   | 52±3   | 408±7   | 566±8 |
|  | 10-SLR1007-26 | 31.2        | 26.5    | 106     | 123±5  | 119±5  | 42±2   | 99±4   | 107±5  | 251±5   | 60±3   | 505±7   | 687±8 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。

Regular mark (常规标记) : 10-10 WLL 4 T CE SLR + BATCH NUMBER (批号)

### Regular mark 常规标记:

| MARK 标记        | 10              | -10              | WLL 4T                  | SLR                | CE                     | 18-1              |
|----------------|-----------------|------------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 100 等级100级 | WORKING LOAD LIMIT 工作应力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |




## G100 CLEVIS EYE GRAB HOOK 100级带羊角眼型抓钩

- ◆ Forged super alloy steel-Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for G100 chain
- ◇ 与100级链条配合使用
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%
- ◆ Individually proof test at 2.5times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5times Working Load for 20000cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ All load pins are 100% induvially inspected and tested
- ◇ 所有销轴进行100%的测试，确保相同的硬度品质
- ◆ Surface finish (表面处理) : Powder liastified (喷塑)
- ◆ Colour code (色号) : Blue (蓝色) RAL5015



### SLR1051-G100 CLEVIS EYE GRAB HOOK 100级带羊角眼型抓钩

|                                                                                   | ITEM CODE<br>货号 | WEIGHT<br>(Kg) | WLL<br>(T) | BF<br>(T) | Φ±2 | A±0.5 | B±2  | C±0.5 | L±2 | L±3 | Φ'±1 | D±1.5 |
|-----------------------------------------------------------------------------------|-----------------|----------------|------------|-----------|-----|-------|------|-------|-----|-----|------|-------|
|  | 10-SLR1051-6    | 0.3            | 1.4        | 5.6       | 18  | 8     | 32   | 8     | 88  | 112 | 9    | 17.5  |
|                                                                                   | 10-SLR1051-8    | 0.69           | 2.5        | 1         | 24  | 10    | 36   | 10    | 116 | 145 | 12   | 23    |
|                                                                                   | 10-SLR1051-10   | 1.33           | 4          | 16        | 30  | 12.5  | 48   | 12.5  | 145 | 184 | 15   | 28.5  |
|                                                                                   | 10-SLR1051-13   | 2.36           | 6.7        | 26.8      | 37  | 15.5  | 59.5 | 15.5  | 178 | 223 | 18   | 35    |
|                                                                                   | 10-SLR1051-16   | 4.5            | 10         | 40        | 45  | 19    | 70   | 19    | 216 | 273 | 22   | 42    |
|                                                                                   | 10-SLR1051-20   | 9              | 16         | 64        | 58  | 24.5  | 85   | 24.5  | 278 | 351 | 28   | 52    |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Regular mark (常规标记以10-SLR1051-8为例) : 8-10 WLL2.5T CE SLR+BATCH NUMBER (批号)

### Regular mark 常规标记:

| MARK 标记           | 10                 | -10                 | WLL 4T                     | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|---------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 100<br>等级100级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |




## G100 SPECIAL EYE SELFLOCKING HOOK 100级 异型眼型安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% strong than G80
- ◆ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnet flux crack detection
- ◆ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified ( 喷塑 )
- ◆ Colour code(色号): Blue(蓝色)RAL5015
- ◆ Positive lock latch is selflocking when hook is loaded.
- ◆ 在负荷下，钩子的自锁结构会自动闭合，更安全



### SLR1016-G100 SPECIAL EYE SELFLOCKING HOOK 100级 异型眼型安全钩

**SLR1016**



| ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | B      | Φ        | G    | K       | H        | ΦD   | N      | M     | L       |
|---------------|----------------|------------|------------|--------|----------|------|---------|----------|------|--------|-------|---------|
| 10-SLR1016-08 | 0.81           | 2.5        | 10         | 37.5±2 | 27±1.5   | 38±2 | 136.5±3 | 21±1     | 12±1 | 215±1  | 91±2  | 169.5±3 |
| 10-SLR1016-10 | 1.41           | 4          | 16         | 48±3   | 34.5±1.5 | 45±3 | 168.5±3 | 30.5±1.5 | 15±1 | 23±1.5 | 113±2 | 214±3   |
| 10-SLR1016-13 | 2.61           | 6.7        | 26.8       | 52.5±3 | 40±2     | 57±3 | 205±4   | 39±1.5   | 20±1 | 30±1.5 | 126±3 | 264±4   |
| 10-SLR1016-16 | 4.45           | 10         | 40         | 68±3   | 50±2.5   | 59±3 | 252±4   | 48.5±2   | 27±1 | 32±2   | 168±3 | 328.5±4 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark ( 常规标记 ): 10-10 WLL4T CE SLR +BATCH NUMBER ( 批号 )

### Regular mark 常规标记:

| MARK 标记           | 10                 | -10                 | WLL 4T                     | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|---------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 100<br>等级100级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G100 SPECIAL CLEVIS SELFLOCKING HOOK 100级 异型羊角安全钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ Suitable for G100 chain
- ◇ 与100级链条配合使用
- ◆ 25% strong than G80
- ◇ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 每件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Blue(蓝色)RAL5015



- ◆ Positive lock latch is selflocking when hook is loaded.
- ◇ 在负荷下, 钩子的自锁结构会自动闭合, 更安全

### SLR1017-G100 SPECIAL CLEVIS SELFLOCKING HOOK 100级 异型羊角安全钩

SLR1017



| ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A     | B      | C        | H        | G    | N      | M     | K     |
|---------------|----------------|------------|------------|-------|--------|----------|----------|------|--------|-------|-------|
| 10-SLR1017-08 | 0.78           | 2.5        | 10         | 165±3 | 37.5±2 | 9.5±0.5  | 21±1     | 38±2 | 21.5±1 | 91±2  | 118±2 |
| 10-SLR1017-10 | 1.42           | 4          | 16         | 204±3 | 48±2   | 12.5±1   | 30.5±1.5 | 45±3 | 23±1.5 | 113±2 | 150±2 |
| 10-SLR1017-13 | 2.56           | 6.7        | 26.8       | 244±4 | 52.5±3 | 15±1.5   | 38±1.5   | 57±3 | 30±1.5 | 135±3 | 176±3 |
| 10-SLR1017-16 | 4.21           | 10         | 40         | 288±4 | 68±3   | 18.5±1.5 | 48.5±3   | 59±3 | 32±2   | 168±3 | 250±3 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍  
Regular mark (常规标记): 10-10 WLL4T CE SLR +BATCH NUMBER (批号)

### Regular mark 常规标记:

| MARK 标记        | 10              | -10              | WLL 4T                  | SLR                | CE                     | 18-1              |
|----------------|-----------------|------------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 100 等级100级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |





## G100 SPECIAL SWIVEL SELFLOCKING HOOK 100级 异型旋转安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for G100 chain
- ◆ 与100级链条配合使用
- ◆ 25% strong than G80
- ◆ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◆ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Blue(蓝色)RAL5015


- ◆ Positive lock latch is selflocking when hook is loaded.
- ◆ 在负荷下，钩子的自锁结构会自动闭合，更安全



SLR1018-G100 SPECIAL SWIVEL SELFLOCKING HOOK  
100级 异型旋转安全钩

SLR1018

| ITEM NO.      | WEIGHT (kg) | WLL (T) | BL (T) | A     | B    | C     | D      | Φ      | F      | G    | H        | N      | M     | K       |
|---------------|-------------|---------|--------|-------|------|-------|--------|--------|--------|------|----------|--------|-------|---------|
| 10-SLR1018-08 | 1.03        | 2.5     | 10     | 220±3 | 28±2 | 36±15 | 62±15  | 13±1   | 38±2   | 39±2 | 21±1     | 21.5±1 | 91±2  | 186±3   |
| 10-SLR1018-10 | 1.86        | 4       | 16     | 255±3 | 38±2 | 42±2  | 73±2   | 15.5±1 | 48±3   | 45±3 | 30.5±1.5 | 23±1.5 | 113±2 | 219±3   |
| 10-SLR1018-13 | 3.34        | 6.7     | 26.8   | 295±4 | 45±3 | 49±2  | 87.5±2 | 19±1   | 52.5±3 | 57±3 | 38±1.5   | 30±1.5 | 135±3 | 237±4   |
| 10-SLR1018-16 | 5.9         | 10      | 40     | 400±4 | 68±3 | 62±2  | 118±2  | 23±1   | 68±3   | 59±3 | 48.5±2   | 32±2   | 168±3 | 327.5±4 |



Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。  
Regular mark (常规标记): 10-10 WLL 4 T CE SLR + BATCH NUMBER (批号)

## G100 COMPONENTS 100级索具配件系列

- ◆ Supply only on special request. Not for recommendation
- ◆ 仅在特殊需求下供应，不做推荐
- ◆ For further information, please contact us
- ◆ 如需详细信息，请联系我们



SLR1019



SLR1025



SLR1026



SLR1028



## G100 EYE SLIP HOOK 100级 眼型滑钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Blue (蓝色) RAL5015
- ◆ With cast latch 配铸造舌片配件



### SLR1003-G100 EYE SLIP HOOK WITH CAST LATCH 100级 眼型滑钩 (含铸造舌片)

**SLR1003**

| ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | B ±1 | D ±1 | E ±2 | H ±1 | Ø ±1 | M ±2  | L ±2.5 |
|---------------|----------------|------------|------------|------|------|------|------|------|-------|--------|
| 10-SLR1003-06 | 0.32           | 1.4        | 5.6        | 16.5 | 10   | 18.5 | 21   | 20.5 | 68    | 111    |
| 10-SLR1003-07 | 0.4            | 1.9        | 7.6        | 15   | 11   | 25.5 | 26   | 25   | 86.9  | 137    |
| 10-SLR1003-08 | 0.6            | 2.5        | 10         | 19   | 11   | 25   | 27.5 | 25   | 87.6  | 137    |
| 10-SLR1003-10 | 1.2            | 4          | 16         | 26   | 16   | 29.5 | 32   | 35   | 106.4 | 171.5  |
| 10-SLR1003-13 | 2.2            | 6.7        | 26.8       | 33   | 19   | 38   | 43.5 | 43   | 134   | 219    |
| 10-SLR1003-16 | 3.5            | 10         | 40         | 40   | 24.5 | 46   | 50   | 51   | 158   | 260    |
| 10-SLR1003-20 | 6.2            | 16         | 64         | 48   | 27   | 52   | 56   | 55   | 190   | 298    |
| 10-SLR1003-22 | 11.5           | 19         | 76         | 50   | 29   | 66   | 62   | 60   | 214   | 330    |
| 10-SLR1003-26 | 12.2           | 26.5       | 106        | 60   | 35   | 73   | 75   | 70   | 245   | 376    |
| 10-SLR1003-32 | 17.5           | 39.3       | 157.2      | 71   | 39   | 87   | 89   | 81.5 | 270   | 458    |



Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。  
Regular mark (常规标记): 10-10 WLL 4 T CE SLR + BATCH NUMBER (批号)

### SP-SLR1003&SLR1004-SPARE LATCH KIT FOR SLR1003 & SLR1004 SLR1003和SLR1004的铸造舌片配件



| ITEM CODE<br>货号 | SIZE<br>规格 | ITEM CODE<br>货号 | SIZE<br>规格 |
|-----------------|------------|-----------------|------------|
| SP-SLR1003/4-6  | 6-10       | SP-SLR1003/4-16 | 16-10      |
| SP-SLR1003/4-7  | 7-10       | SP-SLR1003/4-20 | 20-10      |
| SP-SLR1003/4-8  | 8-10       | SP-SLR1003/4-22 | 22-10      |
| SP-SLR1003/4-10 | 10-10      | SP-SLR1003/4-26 | 26-10      |
| SP-SLR1003/4-13 | 13-10      | SP-SLR1003/4-32 | 32-10      |

1 SET = GALVANIZED CAST LATCH + GALVANIZED SPRING + GALVANIZED SCREW + GALVANIZED NUT  
1套=电镀锌铸造舌片+电镀锌弹簧+电镀锌螺丝+电镀锌螺母



## G100 EYE SLING HOOK G100 眼型翅钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for G100 chain
- ◆ 与100级链条配合使用。
- ◆ 25% stronger than G80
- ◆ 比80级产品性能提升25%。
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 每件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◆ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Blue (蓝色) RAL5015



### SLR1008-G100 EYE SLING HOOK G100 眼型翅钩

**SLR1008**

| ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | E        | Φ      | D       | M       | L       | L'      | W        |
|---------------|----------------|------------|------------|----------|--------|---------|---------|---------|---------|----------|
| 10-SLR1008-06 | 0.15           | 1.4        | 5.6        | 8±1      | 13.5±1 | 8±0.5   | 43.5±2  | 73±3    | 46±3    | 25.5±1.5 |
| 10-SLR1008-08 | 0.3            | 2.5        | 10         | 11±1     | 17.5±1 | 9.5±0.5 | 53±2    | 93±3    | 61±3    | 33.5±1.5 |
| 10-SLR1008-10 | 0.79           | 4          | 16         | 13.5±1.5 | 22±1.5 | 14±0.5  | 74±2    | 129±3   | 85±3    | 42±2     |
| 10-SLR1008-13 | 1.67           | 6.7        | 26.8       | 15±1.5   | 27±1.5 | 18.5±1  | 96±3    | 166±4   | 104±4   | 53.5±2   |
| 10-SLR1008-16 | 2.74           | 10         | 40         | 19±1.5   | 36±2   | 22±1    | 116±3   | 186±4   | 119±4   | 74±2.5   |
| 10-SLR1008-20 | 4.72           | 16         | 64         | 25±2     | 44±2   | 23±1.5  | 145±3   | 225±5   | 146±5   | 87±2.5   |
| 10-SLR1008-22 | 8.2            | 19         | 76         | 27±2     | 48.5±2 | 26±1.5  | 160.5±3 | 260.5±5 | 165.5±5 | 90±3     |
| 10-SLR1008-26 | 11.35          | 26.5       | 106        | 34±2     | 52±2   | 34±1.5  | 190±3   | 311±5   | 204±5   | 110±3    |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍  
Regular mark (常规标记): 10-10 WLL 4 T CE SLR + BATCH NUMBER (批号)

### Regular mark 常规标记:

| MARK 标记        | 10              | -10               | WLL 4T                  | SLR                | CE                     | 18-1              |
|----------------|-----------------|-------------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 100 等级 100级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## G100 CLEVIS SLING HOOK G100 羊角翅钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for G100 chain
- ◇ 与100级链条配合使用。
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%。
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Blue (蓝色) RAL5015



### SLR1009-G100 CLEVIS SLING HOOK

#### G100 羊角翅钩

### SLR1009



| ITEM NO.      | WEIGHT (kg) | WLL (T) | B.L (T) | A        | B       | E        | M        | W      | L'       | L      | Φ      |
|---------------|-------------|---------|---------|----------|---------|----------|----------|--------|----------|--------|--------|
| 10-SLR1009-06 | 0.22        | 1.4     | 5.6     | 7.5±0.5  | 32±1.5  | 18±1     | 8±1      | 43.5±2 | 25.5±1.5 | 44.5±3 | 77.3±2 |
| 10-SLR1009-08 | 0.34        | 2.5     | 10      | 9.5±0.5  | 38±1.5  | 24±1.5   | 11±1     | 54±2   | 33.5±1.5 | 53±3   | 93±3   |
| 10-SLR1009-10 | 0.82        | 4       | 16      | 12.5±0.5 | 46±1.5  | 29.5±1.5 | 13.5±1.5 | 72±2   | 42±2     | 73±3   | 127±3  |
| 10-SLR1009-13 | 1.75        | 6.7     | 26.8    | 15±1     | 59±1.5  | 37±1.5   | 15±1.5   | 96±2   | 53.5±2   | 92±4   | 164±4  |
| 10-SLR1009-16 | 2.88        | 10      | 40      | 18.5±1   | 70±2    | 46±2     | 19±1.5   | 115±3  | 74±2.5   | 99±4   | 188±4  |
| 10-SLR1009-20 | 4.84        | 16      | 64      | 24±1.5   | 85±2    | 52±2     | 25±2     | 145±3  | 87±2.5   | 123±5  | 223±5  |
| 10-SLR1009-22 | 8.3         | 19      | 76      | 27±2     | 100±2.5 | 61±2.5   | 27±2     | 159±3  | 90±3     | 141±5  | 260±5  |
| 10-SLR1009-26 | 13.72       | 26.5    | 106     | 30±2     | 110±2.5 | 70±2.5   | 34±2     | 190±4  | 110±3    | 187±5  | 320±5  |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark (常规标记): 10-10 WLL 4 T CE SLR + BATCH NUMBER (批号)

### SP-SLR1009 - SPARE PART FOR SLR1009(LOAD PIN) SLR1009销轴配件



| ITEM CODE<br>货号 | SIZE<br>规格 | ITEM CODE<br>货号 | SIZE<br>规格 |
|-----------------|------------|-----------------|------------|
| SP-SLR1009-6    | 6-10       | SP-SLR1009-16   | 16-10      |
| SP-SLR1009-8    | 8-10       | SP-SLR1009-20   | 20-10      |
| SP-SLR1009-10   | 10-10      | SP-SLR1009-22   | 22-10      |
| SP-SLR1009-13   | 13-10      |                 |            |

1 SET = BLACK PIN + 2 BLACK SPRING TYPE STRAIGHT PINS 1套=发黑销轴+2个发黑弹性圆柱销



## G100 SPECIAL EYE GRAB HOOK WITH SAFETY PIN 100级带安全挡销眼型抓钩

- ◆ Forged super alloy steel- Quenched and Tempered.
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理。
- ◆ Suitable for G100 chain
- ◇ 与100级链条配合使用。
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%。
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◇ 逐件按工作拉力的2.5倍进行验证测试。
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试。
- ◆ Breakage test
- ◇ 对每一批产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Blue (蓝色) RAL5015


- ◆ Adjust G100 chain length 调节链条长度
- ◆ With safety pin 带安全销，更安全



### SLR1023 – G100 SPECIAL EYE GRAB HOOK WITH SAFETY PIN

**SLR1023**

#### 100级 带安全挡销眼型抓钩



| ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A        | B        | Φ      | Φ1       | E          | L       |
|---------------|----------------|------------|------------|----------|----------|--------|----------|------------|---------|
| 10-SLR1023-8  | 0.5            | 2.5        | 10         | 35±0.5-1 | 25±0.5-1 | 12±1   | 16.5±1   | 10.5±1     | 110±2   |
| 10-SLR1023-10 | 1.0            | 4          | 16         | 44±0.5-1 | 32±0.5-1 | 15±1   | 21±1     | 13±1-1.5   | 136.5±2 |
| 10-SLR1023-13 | 2.2            | 6.7        | 27         | 57±1-2   | 40±1-2   | 20.5±2 | 27.5±1.5 | 15.5±1-1.5 | 180±4   |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。

Regular mark (常规标记): 10-10 WLL 4 T CE SLR + BATCH NUMBER (批号)

### SPARE PART FOR SLR1023(SAFETY PIN)

#### SLR1023的安全销配件



| ITEM CODE<br>货号 | SIZE<br>规格 |
|-----------------|------------|
| SP-SLR1023-8    | 8-10       |
| SP-SLR1023-10   | 10-10      |
| SP-SLR1023-13   | 13-10      |

1 SET = GALVANIZED SPRING + GALVANIZED PIN + GALVANIZED NUT

1套=电镀弹簧+电镀销轴+电镀螺母

### Regular mark 常规标记:

| MARK 标记           | 10                 | -10                 | WLL 4T                     | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|---------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 100<br>等级100级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G100 SPECIAL CLEVIS GRAB HOOK WITH SAFETY PIN 100级 带安全挡销羊角抓钩


- ◆ Forged super alloy steel- Quenched and Tempered.
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理。
- ◆ Suitable for G100 chain
- ◇ 与100级链条配合使用。
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%。
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◇ 逐件按工作拉力的2.5倍进行验证测试。
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试。
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Blue (蓝色) RAL5015



- ◆ Adjust G100 chain length 调节链条长度
- ◆ With safety pin 带安全销，更安全

### SLR1024 – G100 SPECIAL CLEVIS GRAB HOOK WITH SAFETY PIN 100级 带安全挡销羊角抓钩

**SLR1024**



| ITEM NO.      | WEIGHT (kg) | WLL (T) | B.L (T) | A±1  | B±0.8 | C±1  | R±1.5 | D±0.5 | E±0.5 | L±2   |
|---------------|-------------|---------|---------|------|-------|------|-------|-------|-------|-------|
| 10-SLR1024-8  | 0.62        | 2.5     | 10      | 35.5 | 25    | 38   | 66    | 10    | 10.5  | 109   |
| 10-SLR1024-10 | 1.16        | 4       | 16      | 44   | 32    | 46   | 82    | 12    | 13    | 134   |
| 10-SLR1024-13 | 2.6         | 6.7     | 26.8    | 57   | 40    | 59.5 | 107   | 15    | 15.5  | 175.5 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。  
Regular mark (常规标记): 10-10 WLL 4T CE SLR + BATCH NUMBER (批号)

### SPARE PART FOR SLR1023(SAFETY PIN) SLR1024的安全销配件



| ITEM CODE<br>货号 | SIZE<br>规格 |
|-----------------|------------|
| SP-SLR1024-8    | 8-10       |
| SP-SLR1024-10   | 10-10      |
| SP-SLR1024-13   | 13-10      |

1 SET = GALVANIZED SPRING + GALVANIZED PIN+GALVANIZED NUT  
1套=电镀锌弹簧+电镀锌销轴+电镀锌螺母

### Regular mark 常规标记:

| MARK 标记        | 10              | -10              | WLL 4T                  | SLR                | CE                     | 18-1              |
|----------------|-----------------|------------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 100 等级100级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## G100 CLEVIS FOREST HOOK 100级羊角森林钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% stronger than G80
- ◆ 比80级产品性能提升25%
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◆ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Blue (蓝色) RAL5015



### SLR1021-G100 CLEVIS FOREST HOOK 100级羊角森林钩

**SLR1021**

Not for lifting, only for logging 不能用于起重，仅用于伐木业拖拉或捆绑

| ITEM CODE    | WEIGHT (KG) | WLL (T) | B.L (T) | A±1 | B±1 | E±1 | F±1 | M±1 | N±2 | K±2  | L'±1 | L±1  |
|--------------|-------------|---------|---------|-----|-----|-----|-----|-----|-----|------|------|------|
| 10-SLR1021-8 | 0.41        | 2.5     | 10      | 9.5 | 20  | 9.8 | 31  | 35  | 18  | 72.8 | 59.4 | 95.5 |
|              |             |         |         |     |     |     |     |     |     |      |      |      |
|              |             |         |         |     |     |     |     |     |     |      |      |      |
|              |             |         |         |     |     |     |     |     |     |      |      |      |
|              |             |         |         |     |     |     |     |     |     |      |      |      |

| ITEM CODE     | WEIGHT (KG) | WLL (T) | B.L (T) | A±1 | B±1  | E±1 | F±1  | M±1 | N±2 | K±2   | L'±1 | L±1 |
|---------------|-------------|---------|---------|-----|------|-----|------|-----|-----|-------|------|-----|
| 10-SLR1021-13 | 1.87        | 6.7     | 26.8    | 16  | 37.5 | 17  | 49.5 | 59  | 27  | 119.5 | 97.5 | 162 |
|               |             |         |         |     |      |     |      |     |     |       |      |     |
|               |             |         |         |     |      |     |      |     |     |       |      |     |
|               |             |         |         |     |      |     |      |     |     |       |      |     |
|               |             |         |         |     |      |     |      |     |     |       |      |     |

Ultimate load is 4 times the Working Load Limit, 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记        | 8               | -10              | WLL 2.5T                | SLR                | CE                     | 18-1              |
|----------------|-----------------|------------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 100 等级100级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## G100 WEBBING SLING HOOK 100级 WK 吊带钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Blue (蓝色) RAL5015



### SLR1055-G100 WEBBING SLING HOOK

WK 吊带钩

SLR1055



| ITEM CODE     | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±1  | B±1  | C±1 | D±1 | M±1 | N±0.5 | E±0.5 | F±0.5 | L±3   | L'±3 | H±1  |
|---------------|----------------|------------|------------|------|------|-----|-----|-----|-------|-------|-------|-------|------|------|
| 10-SLR1055-1T | 0.73           | 1          | 4          | 11.5 | 40   | 78  | 28  | 75  | 17    | 33    | 30    | 124   | 87   | 21   |
| 10-SLR1055-2T | 1.27           | 2          | 8          | 18.5 | 44.5 | 91  | 35  | 90  | 21    | 40    | 39    | 148   | 103  | 27   |
| 10-SLR1055-3T | 2.3            | 3          | 12         | 21.5 | 54   | 114 | 45  | 110 | 26    | 41    | 48    | 175   | 115  | 33   |
| 10-SLR1055-4T | 4.73           | 4          | 16         | 40.5 | 76   | 133 | 56  | 139 | 32    | 50.5  | 60    | 223.5 | 147  | 40.5 |
| 10-SLR1055-5T | 4.73           | 5          | 20         | 40.5 | 76   | 133 | 56  | 139 | 32    | 50.5  | 60    | 223.5 | 147  | 40.5 |
| 10-SLR1055-6T | 4.73           | 6          | 24         | 40.5 | 76   | 133 | 56  | 139 | 32    | 50.5  | 60    | 223.5 | 147  | 40.5 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:


| MARK 标记        | 108             | -10              | WLL 5T                  | SLR                | CE                     | 18-1              |
|----------------|-----------------|------------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 100 等级100级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |





## G100 EYE SLING HOOK G100 带扁大开口眼型钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Blue (蓝色) RAL5015



### SLR1074-G100 EYE SLING HOOK G100 带扁大开口眼型钩

SLR1074


| ITEM CODE   | WEIGHT (KG) | WLL (T) | B.L (T) | Φ ± 1 | L ± 3 | B ± 2 | R ± 2 | E ± 1 | Φ1 ± 1 | H ± 2 | M    |
|-------------|-------------|---------|---------|-------|-------|-------|-------|-------|--------|-------|------|
| SLR-1074-6  | 0.382       | 1.4     | 5.6     | 20.5  | 133   | 100   | 102.7 | 49    | 10     | 17    | 19   |
| SLR-1074-8  | 0.72        | 2.5     | 10      | 24    | 158.5 | 130   | 120.5 | 62    | 12     | 19    | 27.5 |
| SLR-1074-10 | 1.25        | 4       | 16      | 31.5  | 199   | 152.5 | 153.2 | 73    | 15     | 25    | 31   |
| SLR-1074-13 | 2.32        | 6.7     | 26.8    | 44    | 241.5 | 186   | 184   | 90    | 19     | 33    | 39.3 |
| SLR-1074-16 | 3.45        | 10      | 40      | 49    | 279   | 218   | 216   | 105   | 22     | 37    | 42   |

Ultimate load is 4 times the Working Load Limit, 破断拉力是工作拉力的4倍。

Regular mark (常规标记): -10-10 WLL4T CE SLR + BATCH NUMBER (批号)

## G100 CLEVIS LINK 100级 羊角环

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Blue (蓝色) RAL5015



### SLR1033-G100 CLEVIS LINK 100级羊角环

SLR1033

For container lifting 用于集装箱吊装

| ITEM CODE     | WEIGHT (KG) | WLL (T) | B.L (T) | A ± 1 | B ± 0.5 | C ± 1 | D ± 1 | M ± 1.5 | N ± 2 | H ± 1 | K ± 0.5 | L ± 1.5 | G ± 0.2 | E ± 1 |
|---------------|-------------|---------|---------|-------|---------|-------|-------|---------|-------|-------|---------|---------|---------|-------|
| 10-SLR1033-13 | 1.36        | 6.7     | 26.8    | 59    | 38      | 15    | 50    | 93      | 90    | 21    | 21.5    | 174     | 16      | 35    |

Regular mark (常规标记): -13-10 WLL 6.7T CE SLR + BATCH NUMBER (批号)



## G100 CLEVIS GRAB HOOK WITH CRADLE 100级 带羊角链环翅钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% strong than G80
- ◇ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnetflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Blue(蓝色)RAL5015



### SLR1080-G100 CLEVIS GRAB HOOK WITH CRADLE

#### 100级 带羊角链环翅钩

SLR1080



| ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | BF<br>(T) | A        | B     | C      | E        | H      | L       | K     | J       | φ        |
|---------------|----------------|------------|-----------|----------|-------|--------|----------|--------|---------|-------|---------|----------|
| 10-SLR1080-06 | 0.366          | 1.4        | 5.6       | 8±0.5    | 32±1  | 18±0.8 | 8.3±0.5  | 16±1   | 128.7±2 | 80±2  | 104.7±2 | 7±0.5    |
| 10-SLR1080-08 | 0.79           | 2.5        | 10        | 9.5±0.5  | 37±1  | 24±1   | 10.5±0.5 | 25±1.5 | 165±3   | 130±2 | 100±2   | 10±0.5   |
| 10-SLR1080-10 | 1.522          | 4          | 16        | 12.5±0.5 | 48±1  | 29.5±1 | 13±1     | 28±1.5 | 209±3.5 | 167±2 | 123±2   | 12.6±0.5 |
| 10-SLR1080-13 | 3.372          | 6.7        | 26.8      | 16±0.5   | 58±1  | 37±1   | 15.5±1   | 37±1.5 | 289±4   | 223±3 | 163±3   | 16.5±1   |
| 10-SLR1080-16 | 5.67           | 10         | 40        | 18.5±1   | 70±1  | 46±1   | 18.5±1   | 40±2   | 328±4   | 271±4 | 194±3   | 20±1     |
| 10-SLR1080-20 | 9.79           | 16         | 64        | 24±1     | 85±2  | 52±2   | 25±1     | 46±2   | 398±5   | 328±4 | 247±4   | 25±1     |
| 10-SLR1080-22 | 14.62          | 19         | 76        | 25±1     | 100±2 | 61±2   | 26.5±1   | 51.5±2 | 420±5   | 354±5 | 259±4   | 27±1     |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark (常规标记): 10-10 WLL4T CE SLR +BATCH NUMBER (批号)




## G100 LARGE OPENING CLEVIS HOOK 100级 羊角大开口钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Blue (蓝色) RAL5015

### SLR1082-G100 LARGE OPENING CLEVIS HOOK

**SLR1082**

100级 羊角大开口钩




| ITEM NO.      | WEIGHT (kg) | WLL (T) | BF (T) | A        | B      | C        | E     | M     | N      | H      | L     |
|---------------|-------------|---------|--------|----------|--------|----------|-------|-------|--------|--------|-------|
| 10-SLR1082-6  | 0.41        | 1.4     | 5.6    | 8±0.5    | 32±1   | 18±1     | 49±2  | 100±2 | 17±1   | 18.3±1 | 126±3 |
| 10-SLR1082-8  | 0.8         | 2.5     | 10     | 9.5±0.5  | 36±1   | 23±1     | 62±3  | 128±3 | 20±1   | 27±1   | 160±3 |
| 10-SLR1082-10 | 1.4         | 4       | 16     | 12.5±1   | 48±1   | 28.5±1.5 | 72±3  | 153±3 | 25±1.5 | 31±1.5 | 192±4 |
| 10-SLR1082-13 | 2.88        | 6.7     | 26.8   | 15±1     | 59±1.5 | 35±2     | 88±4  | 186±4 | 33±2   | 39±1.5 | 232±5 |
| 10-SLR1082-16 | 5.1         | 10      | 40     | 18.5±1.5 | 70±1.5 | 46±2     | 103±4 | 218±5 | 40±2   | 50±2   | 284±5 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark (常规标记): 10-10 WLL4T CE SLR +BATCH NUMBER (批号)

## G100 CLEVIS HOOK 100级 羊角链环

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% stronger than G80
- ◇ 比80级产品性能提升25%
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Blue (蓝色) RAL5015



### SLR1081-G100 CLEVIS HOOK

**SLR1081**

100级 羊角链环

| ITEM NO.      | WEIGHT (kg) | WLL (T) | BF (T) | A        | B    | E    | H      | L     | ø      |
|---------------|-------------|---------|--------|----------|------|------|--------|-------|--------|
| 10-SLR1081-10 | 0.84        | 4       | 16     | 13.8±0.5 | 41±1 | 17±1 | 36±1.5 | 128±3 | 28.5±1 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark (常规标记): 10-10 WLL4T CE SLR +BATCH NUMBER (批号)



## G100 SLIDING COUPLING TACKLE HOOK 100级 滑车钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ 25% strong than G80
- ◇ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnetflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Blue(蓝色)RAL5015

### SLR1085-G100 SLIDING COUPLING TACKLE HOOK

SLR1085

#### 100级 滑车钩

| ITEM NO. | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A    | B    | E    | F     | M    | N    | G    | L     |
|----------|----------------|------------|------------|------|------|------|-------|------|------|------|-------|
| 10.8     | 1.57           | 4          | 16         | 74±1 | 48±1 | 30±2 | 106±2 | 12±1 | 25±1 | 32±1 | 158±3 |
|          |                |            |            |      |      |      |       |      |      |      |       |
|          |                |            |            |      |      |      |       |      |      |      |       |
|          |                |            |            |      |      |      |       |      |      |      |       |
|          |                |            |            |      |      |      |       |      |      |      |       |
|          |                |            |            |      |      |      |       |      |      |      |       |
|          |                |            |            |      |      |      |       |      |      |      |       |
|          |                |            |            |      |      |      |       |      |      |      |       |
|          |                |            |            |      |      |      |       |      |      |      |       |
|          |                |            |            |      |      |      |       |      |      |      |       |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark (常规标记): 10-10 WLL4T CE SLR +BATCH NUMBER (批号)



## G100 CLEVIS SLING HOOK WITH CAST LATCH 100级 羊角滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% strong than G80
- ◇ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Blue(蓝色)RAL5015

### SLR1088-G100 CLEVIS SLING HOOK WITH CAST LATCH

SLR1088

#### 100级 羊角滑钩

| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | A      | B      | C        | E    | M     | N      | H    | K       | L       |
|--------------|-------------|---------|---------|--------|--------|----------|------|-------|--------|------|---------|---------|
| <b>6-10</b>  | 0.3         | 1.4     | 5.6     | 8±0.5  | 28.8±1 | 18±1     | 23±2 | 66±2  | 15.5±1 | 19±1 | 79±2    | 112±2   |
| <b>8-10</b>  | 0.585       | 2.5     | 10      | 9±0.5  | 35±1   | 23±1     | 27±2 | 85±2  | 20±1   | 25±1 | 99.5±2  | 140±2   |
| <b>10-10</b> | 1.19        | 4       | 16      | 12±0.5 | 44±1   | 25.5±1   | 33±2 | 103±2 | 24±1   | 28±1 | 121±2   | 174±3   |
| <b>13-10</b> | 2.32        | 6.7     | 26.8    | 15±0.5 | 57±2   | 34±1.5   | 40±2 | 133±3 | 38±1   | 38±1 | 147.6±3 | 213.6±3 |
| <b>16-10</b> | 3.82        | 10      | 40      | 18.5±1 | 67±2   | 41.5±1.5 | 44±2 | 161±3 | 41.5±2 | 41±2 | 166±3   | 250±3   |
| <b>20-10</b> | 6.77        | 16      | 64      | 23±1   | 89±2   | 51±2     | 53±3 | 187±3 | 48±2   | 50±2 | 200±3   | 292±3   |
| <b>22-10</b> | 10          | 19      | 76      | 25±1   | 97.5±2 | 61±2     | 72±3 | 240±3 | 57±2   | 63±2 | 228±4   | 339±4   |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark (常规标记): 10-10 WLL4T CE SLR +BATCH NUMBER (批号)




## G100 EYE SHORTENING GRAB HOOK 100级 眼型翅钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% strong than G80
- ◇ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnetflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理) : Powder plastified ( 喷塑 )
- ◆ Colour code(色号) : Blue(蓝色)RAL5015



### SLR1090-G100 EYE SHORTENING GRAB HOOK 100级 眼型翅钩

SLR1090



| ITEM NO.     | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A      | B      | C      | E      | M      | ø      | L      |
|--------------|----------------|------------|------------|--------|--------|--------|--------|--------|--------|--------|
| <b>6-10</b>  | 0.23           | 1.4        | 5.6        | 8±1    | 8±0.5  | 25.6±1 | 8.3±1  | 50±2   | 13.5±1 | 80.3±2 |
| <b>8-10</b>  | 0.5            | 2.5        | 10         | 9.5±1  | 11±0.5 | 34±1.5 | 10.5±1 | 62.5±2 | 17.5±1 | 104±2  |
| <b>13-10</b> | 2.15           | 6.7        | 26.8       | 18.5±2 | 17±1   | 56±2   | 15.5±2 | 101±3  | 26±2   | 171±3  |
|              |                |            |            |        |        |        |        |        |        |        |
|              |                |            |            |        |        |        |        |        |        |        |
|              |                |            |            |        |        |        |        |        |        |        |
|              |                |            |            |        |        |        |        |        |        |        |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark ( 常规标记 ) : 10-10 WLL4T CE SLR +BATCH NUMBER ( 批号 )



## G100 CLEVIS GRAB HOOK 100级 羊角翅钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% strong than G80
- ◇ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理) : Powder plastified (喷塑)
- ◆ Colour code(色号) : Blue(蓝色)RAL5015



### SLR1091-G100 CLEVIS GRAB HOOK

#### 100级 羊角翅钩

### SLR1091



| ITEM NO.     | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A       | B    | C      | E      | M      | H     | L     |
|--------------|----------------|------------|------------|---------|------|--------|--------|--------|-------|-------|
| <b>6-10</b>  | 0.265          | 1.4        | 5.6        | 8±0.5   | 32±1 | 18±1   | 8.3±1  | 51±2   | 9±0.5 | 81±2  |
| <b>8-10</b>  | 0.58           | 2.5        | 10         | 9.5±0.5 | 38±1 | 24±1.5 | 10.5±1 | 62.5±2 | 11±1  | 105±2 |
| <b>13-10</b> | 2.4            | 6.7        | 26.8       | 15±1    | 60±2 | 37±2   | 15.5±2 | 101±3  | 16±1  | 173±3 |
| <b>20-10</b> | 7              | 16         | 64         | 23±1    | 85±2 | 51±2   | 24±2   | 149±3  | 26±1  | 257±3 |
|              |                |            |            |         |      |        |        |        |       |       |
|              |                |            |            |         |      |        |        |        |       |       |
|              |                |            |            |         |      |        |        |        |       |       |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark (常规标记): 10-10 WLL4T CE SLR +BATCH NUMBER (批号)




## G100 SWIVEL HOOK WITH LATCH 100级带轴承旋转货钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ 25% strong than G80
- ◇ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflix crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Blue(蓝色)RAL5015

SLR1095-G100 SWIVEL HOOK WITH LATCH  
100级 带轴承旋转货钩

SLR1095



| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | A      | B        | E        | M     | L1    | L     | N      | C        | H        |
|--------------|-------------|---------|---------|--------|----------|----------|-------|-------|-------|--------|----------|----------|
| <b>6-10</b>  | 0.65        | 1.4     | 5.6     | 37±1.5 | 32.5±1.5 | 24±1.5   | 71±2  | 141±3 | 173±3 | 16±1   | 11.5±1   | 19±1     |
| <b>8-10</b>  | 0.95        | 2.5     | 10      | 41.6±2 | 41±2     | 28.5±1.5 | 88±2  | 171±3 | 213±4 | 20±1   | 13±1     | 26±1     |
| <b>10-10</b> | 1.71        | 4       | 16      | 51±2   | 48±2     | 34±2     | 105±3 | 216±4 | 263±4 | 25±1.5 | 15.5±1.5 | 29.5±1.5 |
| <b>13-10</b> | 3.13        | 6.7     | 26.8    | 59±3   | 55±3     | 40±2     | 135±3 | 253±4 | 310±5 | 32±1.5 | 17±1.5   | 38±1.5   |
| <b>16-10</b> | 5.44        | 10      | 40      | 68±3   | 61±3     | 45±3     | 161±4 | 299±5 | 364±5 | 37.5±2 | 21.5±2   | 45±2     |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark (常规标记): 10-10 WLL4T CE SLR +BATCH NUMBER (批号)





## G100 TWISTED EYE HOOK 100级 转脖钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% strong than G80
- ◇ 比80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理) : Powder plastified (喷塑)
- ◆ Colour code(色号) : Blue(蓝色)RAL5015

### SLR1096-G100 TWISTED EYE HOOK

#### 100级 转脖钩

SLR1096

| ITEM NO.     | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A    | B      | C      | ø1      | ø2       | E      | L       |
|--------------|----------------|------------|------------|------|--------|--------|---------|----------|--------|---------|
| <b>8-10</b>  | 0.36           | 2.5        | 10         | 19±1 | 28±1   | 17±1   | 53.5±2  | 31±1.5   | 18.5±1 | 126±2   |
| <b>10-10</b> | 0.72           | 4          | 16         | 26±1 | 40±1.5 | 17.5±1 | 69.5±2  | 39.5±1.5 | 20±1.5 | 156.5±3 |
| <b>13-10</b> | 1.4            | 6.7        | 26.8       | 34±2 | 41±1.5 | 27±1   | 87±2.5  | 53±2     | 27±1.5 | 196±3   |
| <b>16-10</b> | 3.17           | 10         | 40         | 51±2 | 45.5±2 | 31±2   | 109±2.5 | 65±2     | 31±2   | 247.5±4 |
|              |                |            |            |      |        |        |         |          |        |         |
|              |                |            |            |      |        |        |         |          |        |         |



Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark (常规标记) : 10-10 WLL4T CE SLR +BATCH NUMBER (批号)



## G100 EYE TYPE HOOK 100级 眼型滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ 25% strong than G80
- ◇ 比G80级产品性能提高25%
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflix crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理) : Powder plastified ( 喷塑 )
- ◆ Colour code(色号) : Blue(蓝色)RAL5015


### SLR1097-G100 EYE TYPE HOOK 100级 眼型滑钩

**SLR1097**

| ITEM NO.     | WEIGHT<br>(kg) | WLL<br>(T) | BF<br>(T) | A        | E        | M       | N        | H        | K       | L       |
|--------------|----------------|------------|-----------|----------|----------|---------|----------|----------|---------|---------|
| <b>6-10</b>  | 0.27           | 1.4        | 5.6       | 9.5 ± 1  | 22 ± 1.5 | 70 ± 2  | 17 ± 1   | 19 ± 1   | 81 ± 2  | 110 ± 2 |
| <b>8-10</b>  | 0.655          | 2.5        | 10        | 16 ± 1   | 27 ± 1.5 | 86 ± 2  | 24 ± 1   | 23 ± 1   | 108 ± 2 | 144 ± 2 |
| <b>10-10</b> | 1.22           | 4          | 16        | 19 ± 1   | 33 ± 2   | 103 ± 2 | 24 ± 1   | 28 ± 1   | 146 ± 2 | 190 ± 3 |
| <b>13-10</b> | 2.43           | 6.7        | 26.8      | 23 ± 2   | 40 ± 2   | 135 ± 3 | 38 ± 1   | 37 ± 1   | 172 ± 3 | 227 ± 3 |
| <b>16-10</b> | 3.81           | 10         | 40        | 28.5 ± 2 | 44 ± 2   | 161 ± 3 | 41.5 ± 2 | 41 ± 2   | 195 ± 3 | 257 ± 3 |
| <b>20-10</b> | 5.9            | 16         | 64        | 27 ± 2   | 53 ± 2   | 187 ± 3 | 46 ± 2   | 50 ± 2   | 225 ± 4 | 301 ± 4 |
| <b>22-10</b> | 9.1            | 19         | 76        | 32 ± 2   | 72 ± 2   | 240 ± 3 | 57 ± 2   | 59.5 ± 2 | 245 ± 4 | 337 ± 4 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍

Regular mark (常规标记) : 10-10 WLL4T CE SLR +BATCH NUMBER (批号)



## G80 COMPONENTS 80级索具配件

- ◆ REGULAR MARK OF G80 components from SLR
- ◇ 来自于SLR品牌的80级索具配件打字标准
- ◆ For example G80 EYE SELF LOCK HOOK 10-8
- ◇ 以80级眼型自锁钩10-8为例



### Regular mark 常规标记:

| MARK 标记           | 10                 | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G80 SELF-LOCK HOOK IMPROVED 改进型80级自锁钩

### G80 SELF-LOCK HOOKS


(OUR ITEM CODE SLR081, SLR082, SLR083)

We make improvements on the basis of them.

We strongly recommend you to choose **IMPROVED ITEMS** instead of **SLR081,SLR082,SLR083**

对于我们的80级自锁安全钩  
SLR081, SLR082, SLR083,  
我们做了全面改进。  
强烈建议你选用改进产品。

For example SLR081, it is improved to the following  
以SLR081为例,改进后的产品如下

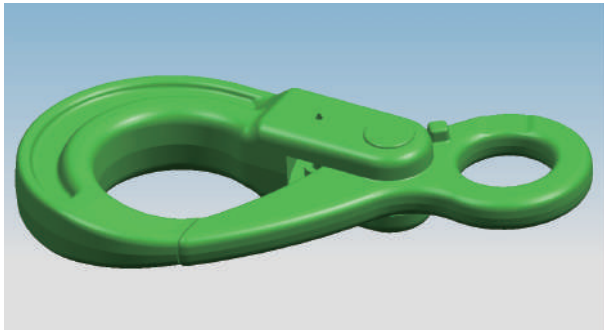

## G80 SELF-LOCK HOOK IMPROVED 改进型80级自锁

### IMPROVEMENT NO.1 改进NO.1

Overall design: 总体设计

Appearance: Look Smooth And Beautiful

Mechanical behavior: Better performance

外观更流畅美观

机械性能更优异


### IMPROVEMENT NO.2 改进NO.2



◆ The hook is opened. We make a new design to make sure the hook will not close before being loaded. So it is very convenient to operate. And it is more safe.

◇ 钩子打开后，我们做了一个新的设计保证钩子在承重前不会闭合，所以更便于操作，也更安全。


### IMPROVEMENT NO.3 改进NO.3



◆ The hook is opened completely. The raised square can avoid finger injury.

◇ 由于我们设计了一个凸起的方块起阻挡作用，即使钩子被完全打开，也不会对手指造成伤害。

### IMPROVEMENT NO.4 改进NO.4



◆ We make above concave radian to protect finger

◇ 我们设计了一个明显的凹进去的弧度用来保护手指。




## G80 EYE TYPE SAFETY HOOK 80级 眼型安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN18-2 G80 chain
- ◇ 与EN18-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试。
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection.
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish(表面处理) : Powder plastified (喷漆)
- ◆ Colour code(色号) : Red(红色) RAL3020 / Yellow(黄色) RAL1003
- ◆ G80 SELF-LOCK HOOK IMPROVED
- ◇ 改进型80级自锁钩
- ◆ Positive lock latch is Self-Locking when hook is loaded
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全



### SLR737-EYE TYPE SAFETY HOOK 眼型安全钩

SLR737



| ITEM NO.      | WEIGHT<br>(KG) | WLL<br>(T) | BL<br>(T) | Φ        | E       | E1     | L1    | L     | H      | D      | N      | M       |
|---------------|----------------|------------|-----------|----------|---------|--------|-------|-------|--------|--------|--------|---------|
| 8-SLR-737-06  | 0.5            | 1.12       | 4.48      | 21±1     | 32±2    | 28±1   | 110±3 | 140±3 | 28±1   | 11±0.5 | 15±0.5 | 73±2    |
| 8-SLR-737-7/8 | 0.85           | 2          | 8         | 25±1     | 40±3    | 35±1   | 136±3 | 175±3 | 28±1   | 13±0.5 | 20±0.5 | 91±2    |
| 8-SLR-737-10  | 1.42           | 3.15       | 12.6      | 34.5±1.5 | 48±3    | 45±1.5 | 168±3 | 213±3 | 30±1.5 | 15±0.5 | 26±1   | 108±2   |
| 8-SLR-737-13  | 2.86           | 5.3        | 21.2      | 39.5±1.5 | 27±3    | 52.5±2 | 207±4 | 267±4 | 40±1.5 | 21±0.5 | 33±1   | 142±3   |
| 8-SLR-737-16  | 5.9            | 8          | 32        | 50±2     | 65±3    | 63±2   | 254±4 | 332±4 | 50.5±2 | 27±0.5 | 38±2   | 168.6±3 |
| 8-SLR-737-20  | 8.5            | 12.5       | 50        | 64.5±2   | 82±3.5  | 82±2   | 278±5 | 360±5 | 55±2   | 27±0.5 | 50±2   | 186±4   |
| 8-SLR-737-22  | 11.6           | 15         | 60        | 70±3     | 80±3.5  | 76±2   | 319±5 | 415±5 | 67±2   | 32±1   | 52±2   | 202±4   |
| 8-SLR-737-26  | 18             | 21.2       | 84.8      | 80±3     | 109±3.5 | 96±3   | 362±6 | 472±5 | 75±3   | 34±1   | 60±3   | 239±5   |
| 8-SLR-737-32  | 46             | 31.5       | 126       | 105±4    | 131±3.5 | 131±3  | 470±6 | 614±5 | 97±3   | 45±1   | 79.5±3 | 329±5   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记           | 10                 | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |




## G80 SELFLOCK HOOK IMPROVED 改进型80级自锁钩

- ◆ Forged super alloy steel- Quenched and Tempered.  
◇ 高强度高韧性特殊合金钢锻造而成，经过热处理。
  - ◆ Suitable for EN818-2 G80 chain.  
◇ 与EN818-2标准80级链条配合使用。
  - ◆ Individually proof test at 2.5 times Working Load Limit.  
◇ 逐件按工作拉力的2.5倍进行验证测试。
  - ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles  
◇ 抽样进行20000次疲劳测试。
  - ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
  - ◆ 100% magnaflux crack detection.  
◇ 100% 进行磁粉探伤
  - ◆ Surface finish(表面处理) : Powder plastified (喷塑)
  - ◆ Colour code(色号) : Red(红色) RAL3020 / Yellow(黄色) RAL1003.
- ◆ Positive lock latch is Self-Locking when hook is loaded  
◇ 在负荷下，钩子的自锁结构会自动闭合，更安全



### SLR738-G80 SELFLOCK HOOK IMPROVED 80级改进型羊角型自锁安全钩

SLR738



| ITEM NO. | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A        | B      | E     | E1     | L1    | L     | H      | N      | M       |
|----------|----------------|------------|------------|----------|--------|-------|--------|-------|-------|--------|--------|---------|
| 6-8      | 0.44           | 1.12       | 4.48       | 8±0.5    | 32±1   | 32±2  | 28±1   | 99±3  | 134±3 | 20±1   | 15±0.5 | 73±2    |
| 7/8-8    | 0.8            | 2          | 8          | 9.5±0.5  | 38.5±1 | 40±3  | 35±1   | 119±3 | 162±3 | 26±1   | 20±0.5 | 91±2    |
| 10-8     | 1.38           | 3.15       | 12.6       | 12.5±0.5 | 46±1   | 48±3  | 45±2   | 142±3 | 195±3 | 30±1.5 | 26±1   | 108±2   |
| 13-8     | 2.81           | 5.3        | 21.2       | 15±0.5   | 59±1   | 57±3  | 52.5±2 | 179±4 | 248±4 | 40±1.5 | 33±1   | 142±3   |
| 16-8     | 6              | 8          | 32         | 18.5±0.5 | 77±1.5 | 65±4  | 63±2   | 225±4 | 310±4 | 50.5±2 | 38±2   | 168.6±3 |
| 18/20-8  | 7.25           | 12.5       | 50         | 24±1     | 81±1.5 | 82±4  | 82±2   | 238±5 | 335±5 | 55±2   | 50±2   | 185±4   |
| 22-8     | 12.8           | 15         | 60         | 25±1     | 97.5±2 | 80±5  | 76±3   | 277±5 | 392±5 | 67±2   | 52±2   | 202±4   |
| 26-8     | 21.8           | 21.2       | 84.8       | 30±1.5   | 118±2  | 109±5 | 96±4   | 312±6 | 449±6 | 75±3   | 60±3   | 239±5   |
| 32-8     | 49.6           | 31.5       | 126        | 35±1.5   | 150±2  | 131±6 | 131±4  | 416±6 | 590±6 | 97±3   | 79.5±3 | 329±5   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记           | 10                 | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G80 SELFLOCK HOOK IMPROVED 改进型80级自锁钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试。
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection.
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish(表面处理) : Powder plastified (喷漆)
- ◆ Colour code(色号) :Red(红色) RAL3020 / Yellow(黄色) RAL1003

- ◆ Positive lock latch is Self-Locking when hook is loaded
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全

### SLR739-G80 SELF-LOCKING HOOK 80级羊角安全钩 (配双圆槽销轴)

SLR739

| ITEM NO.       | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A        | B      | E     | E1     | L1    | L     | H      | N      | M       |
|----------------|----------------|------------|------------|----------|--------|-------|--------|-------|-------|--------|--------|---------|
| 8-SLR739-6     | 0.45           | 1.12       | 4.48       | 8±0.5    | 32±1   | 32±2  | 28±1   | 99±3  | 134±3 | 20±1   | 15±0.5 | 73±2    |
| 8-SLR739-7/8   | 0.83           | 2          | 8          | 9.5±0.5  | 38.5±1 | 40±3  | 35±1   | 119±3 | 162±3 | 26±1   | 20±0.5 | 91±2    |
| 8-SLR739-10    | 1.48           | 3.15       | 12.6       | 12.5±0.5 | 46±1   | 48±3  | 45±2   | 142±3 | 195±3 | 30±1.5 | 26±1   | 108±2   |
| 8-SLR739-13    | 2.85           | 5.3        | 21.2       | 15±0.5   | 59±1   | 57±3  | 52.5±2 | 179±4 | 248±4 | 40±1.5 | 33±1   | 142±3   |
| 8-SLR739-16    | 6              | 8          | 32         | 18.5±0.5 | 77±1.5 | 65±4  | 63±2   | 225±4 | 310±4 | 50.5±2 | 38±2   | 168.6±3 |
| 8-SLR739-18/20 | 7.5            | 12.5       | 50         | 24±1     | 81±1.5 | 62±4  | 82±2   | 238±5 | 335±5 | 55±2   | 50±2   | 185±4   |
| 8-SLR739-22    | 12.28          | 15         | 60         | 25±1     | 97.5±2 | 80±5  | 76±3   | 277±5 | 392±5 | 67±2   | 52±2   | 202±4   |
| 8-SLR739-26    | 21.8           | 21.2       | 84.8       | 30±1.5   | 118±2  | 109±5 | 96±4   | 312±6 | 449±6 | 75±3   | 60±3   | 239±5   |
| 8-SLR739-32    | 46             | 31.5       | 126        | 35±1.5   | 150±2  | 131±6 | 131±4  | 416±6 | 590±6 | 97±3   | 79.5±3 | 329±5   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记           | 10                 | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |






## G80 SELFLOCK HOOK IMPROVED 改进型80级自锁钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish(表面处理) : Powder plastified (喷塑)
- ◆ Colour code(色号) : Red(红色) RAL3020 / Yellow(黄色) RAL1003
- ◆ Positive lock latch is Self-Locking when hook is loaded
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全



### SLR755-G80 SELFLOCK HOOK IMPROVED 改进型80级自锁钩

SLR755



| ITEM NO. | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±1    | B±1    | E     | E1     | L1    | L     | H      | N      | M       |
|----------|----------------|------------|------------|--------|--------|-------|--------|-------|-------|--------|--------|---------|
| 6-8      | 0.71           | 1.12       | 4.48       | 32.5±1 | 25.5±2 | 32±2  | 28±1   | 152±3 | 184±3 | 20±1   | 15     | 73±2    |
| 7/8-8    | 1.15           | 2          | 8          | 36±1   | 29.5±2 | 40±3  | 35±1   | 189±3 | 228±3 | 26±1   | 20     | 91±2    |
| 10-8     | 1.86           | 3.15       | 12.6       | 42±1   | 35±2   | 48±3  | 45±2   | 223±3 | 268±3 | 30±1.5 | 26±1   | 108±2   |
| 13-8     | 3.51           | 5.3        | 21.2       | 50±1   | 41±2   | 57±3  | 52.5±2 | 267±4 | 323±4 | 40±1.5 | 33±1   | 142±3   |
| 16-8     | 7.33           | 8          | 32         | 61±1.5 | 58±2.5 | 65±4  | 63±2   | 339±4 | 413±4 | 50.5±2 | 38±2   | 168.6±3 |
| 18/20-8  | 10.3           | 12.5       | 50         | 72±1.5 | 63±2.5 | 82±4  | 82±3   | 370±5 | 452±5 | 55±2   | 50±2   | 185±4   |
| 22-8     | 17.5           | 15         | 60         | 97±2   | 98±3   | 80±5  | 76±3   | 466±5 | 564±5 | 67±2   | 52±3   | 202±4   |
| 26-8     | 23             | 21.2       | 84.8       | 123±2  | 115±3  | 109±5 | 96±4   | 544±6 | 661±6 | 75±3   | 60±3   | 239±5   |
| 32-8     | 81             | 31.5       | 126        | 140±2  | 147±3  | 131±6 | 131±4  | 679±6 | 830±6 | 97±3   | 79.5±3 | 329±5   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记        | 10              | -8             | WLL 3.15T               | SLR                | CE                     | 18-1              |
|----------------|-----------------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## G80 SPECIAL EYE SELF-LOCKING HOOK 80级 异型眼型安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnetflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理) : Powder plastified (喷塑)
- ◆ Colour code (色号) : Blue (蓝色) RAL5015

- ◆ Positive lock latch is Self-Locking when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全



### SLR077-G80 SPECIAL EYE SELF-LOCKING HOOK 80级 异型眼型安全钩

SLR077



| ITEM NO.    | WEIGHT (kg) | WLL (T) | B.L (T) | B±1.5 | D±1.5 | E±2 | K±2   | H±1 | L±1  | C±2 |
|-------------|-------------|---------|---------|-------|-------|-----|-------|-----|------|-----|
| 8-SLR77-7/8 | 0.68        | 2       | 8       | 35    | 25    | 34  | 131   | 22  | 11   | 40  |
| 8-SLR77-10  | 1.3         | 3.15    | 12.6    | 43    | 32    | 42  | 161   | 26  | 14.5 | 50  |
| 8-SLR77-13  | 2.06        | 5.3     | 21.2    | 50    | 40    | 50  | 195.4 | 31  | 17   | 60  |
| 8-SLR77-16  | 3.73        | 8       | 32      | 61    | 50    | 70  | 238   | 38  | 23   | 72  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记        | 10              | -8             | WLL 3.15T               | SLR                | CE                     | 18-1              |
|----------------|-----------------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## G80 U.S. TYPE EYE SELF-LOCKING HOOK 80级 美式眼型安全钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflex crack detection
- ◇ 100% 进行磁粉探伤
- ◆ With latch.
- ◇ 每件产品均配有保险舌片
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- Yellow (黄色) RAL1003



- ◆ Positive lock latch is Self-Locking when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全

### SLR008-G80 U.S. TYPE EYE SELF-LOCKING HOOK 80级 美式眼型安全钩

SLR008



| ITEM NO.     | WEIGHT<br>(Kg) | WLL<br>(T) | B.L<br>(T) | B ±1.5 | D ±1.5 | H ±1 | K ±2 | L ±3 | Φ ±2 |
|--------------|----------------|------------|------------|--------|--------|------|------|------|------|
| 8-SLR008-6   | 0.48           | 1.2        | 4.8        | 29     | 19.8   | 20   | 100  | 130  | 34   |
| 8-SLR008-7/8 | 0.98           | 2          | 8          | 35     | 25     | 29   | 132  | 173  | 42   |
| 8-SLR008-10  | 1.85           | 3.2        | 12.8       | 42     | 32.5   | 31   | 171  | 217  | 55   |
| 8-SLR008-13  | 3.76           | 5.4        | 21.6       | 55     | 42     | 41   | 213  | 272  | 65   |
| 8-SLR008-16  | 5.3            | 8.2        | 32.8       | 66     | 56     | 52   | 256  | 330  | 76   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记           | 10                 | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## ITALY TYPE EYE SELF-LOCKING HOOK 意式眼型安全钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◆ 100% 进行磁粉探伤
- ◆ With latch.
- ◆ 每件产品均配有保险舌片
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Red(红色)RAL3020  
Yellow (黄色) RAL1003

- ◆ Positive lock latch is Self-Locking when hook is loaded.
- ◆ 在负荷下，钩子的自锁结构会自动闭合，更安全



SLR289-ITALY TYPE EYE SELF-LOCKING HOOK  
意式眼型安全钩

SLR289



| ITEM NO.     | WEIGHT<br>(Kg) | WLL<br>(T) | B.L<br>(T) | A±1.5 | B±1.5 | C±1.5 | E±1 | K±2 | L±3 | Φ±2  |
|--------------|----------------|------------|------------|-------|-------|-------|-----|-----|-----|------|
| 8-SLR289-7/8 | 0.51           | 2          | 8          | 26    | 31    | 29    | 30  | 110 | 142 | 35.5 |
| 8-SLR289-10  | 1.1            | 3.15       | 12.8       | 32    | 40    | 40    | 54  | 149 | 191 | 45   |
| 8-SLR289-16  | 3.87           | 8          | 21.6       | 58    | 61    | 58    | 70  | 226 | 295 | 73   |
|              |                |            |            |       |       |       |     |     |     |      |
|              |                |            |            |       |       |       |     |     |     |      |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记           | 10                 | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |




## G80 EYE SELF-LOCKING HOOK 80级 眼型安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理) : Powder plastified ( 喷塑 )
- ◆ Colour code(色号) : Blue(蓝色)RAL5015
- ◆ Positive lock latch is Self-Locking when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全

### SLR336-G80 EYE SELF-LOCKING HOOK 80级 眼型安全钩

SLR336

|                                                                                   | ITEM NO.       | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | B ±1.5 | D ±1.5 | K ±2  | H ±1 | L ±3  | Φ ±2 |
|-----------------------------------------------------------------------------------|----------------|----------------|------------|------------|--------|--------|-------|------|-------|------|
|  | 8-SLR336-6     | 0.45           | 1.12       | 4.48       | 28     | 22     | 110.5 | 20   | 141   | 34   |
|                                                                                   | 8-SLR336-7/8   | 0.78           | 2          | 8          | 35     | 25     | 136   | 24   | 172   | 46   |
|                                                                                   | 8-SLR336-10    | 1.35           | 3.15       | 12.6       | 45     | 32     | 169   | 28   | 210   | 58   |
|                                                                                   | 8-SLR336-13    | 2.8            | 5.3        | 21.2       | 54     | 40     | 208   | 41   | 265   | 69   |
|                                                                                   | 8-SLR336-16    | 5.4            | 8          | 32         | 60.5   | 50     | 254.5 | 50   | 325   | 86   |
|                                                                                   | 8-SLR336-18/20 | 8.47           | 12.5       | 50         | 74.5   | 61     | 290   | 62   | 378   | 92   |
|                                                                                   | 8-SLR336-22    | 11.35          | 15         | 60         | 80     | 72     | 320   | 65   | 416   | 98   |
|                                                                                   | 8-SLR336-26    | 17.85          | 21.2       | 84.8       | 99     | 80     | 362   | 74   | 472   | 110  |
|                                                                                   | 8-SLR336-32    | 40.7           | 31.5       | 126        | 146    | 105    | 471.5 | 96   | 612.5 | 166  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记        | 10              | -8             | WLL 3.15T               | SLR                | CE                     | 18-1              |
|----------------|-----------------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## G80 SELF-LOCK HOOK 80级自锁钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnetflux crack detection
- ◆ 100% 进行磁粉探伤



### SLR765-G80 EUROPEAN TYPE EYE SELF-LOCKING HOOK 80 级欧式眼型安全钩


**SLR765**

| ITEM NO.     | WEIGHT (KG) | WLL (T) | B.L (T) | Ø    | D±1  | E±1  | H±1  | R±2   | M±2   | L±3   |
|--------------|-------------|---------|---------|------|------|------|------|-------|-------|-------|
| 8-SLR-765-06 | 0.5         | 1.12    | 4.48    | 21   | 43   | 29   | 20   | 110   | 70    | 143   |
| 8-SLR-765-08 | 0.9         | 2       | 8       | 27   | 51   | 35.5 | 26   | 137   | 90    | 175   |
| 8-SLR-765-10 | 1.5         | 3.15    | 12.6    | 34.5 | 64.5 | 45   | 30   | 169   | 108   | 212.5 |
| 8-SLR-765-13 | 2.7         | 5.3     | 21.2    | 40   | 80   | 53.5 | 40.5 | 209   | 138.5 | 270   |
| 8-SLR-765-16 | 5.7         | 8       | 32      | 50   | 104  | 62   | 50.5 | 254   | 170.5 | 331   |
| 8-SLR-765-20 | 7.9         | 12.5    | 50      | 60   | 120  | 76.5 | 62   | 277   | 192.5 | 369   |
| 8-SLR-765-22 | 11.2        | 15      | 60      | 70   | 134  | 80   | 66   | 319.5 | 205   | 417   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL4T CE SLR +BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnetflux crack detection
- ◆ 100% 进行磁粉探伤



### SLR770-EYE SELF-LOCKING HOOK G80 眼型安全钩

**SLR770**

| ITEM NO.    | WEIGHT (kg) | WLL (T) | B.L (T) | B±1  | E±1 | Ø±1 | H±1  | K±2 | L±1 |
|-------------|-------------|---------|---------|------|-----|-----|------|-----|-----|
| 8-SLR770-08 | 0.81        | 2       | 8       | 37.5 | 35  | 45  | 21   | 136 | 12  |
| 8-SLR770-10 | 1.41        | 3.15    | 12.6    | 48   | 46  | 56  | 30.5 | 169 | 15  |
| 8-SLR770-13 | 2.61        | 5.3     | 21.2    | 52   | 56  | 64  | 39   | 205 | 20  |
| 8-SLR770-16 | 4.45        | 8       | 32      | 67.5 | 86  | 77  | 45   | 250 | 27  |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL4T CE SLR +BATCH NUMBER (批号)



## G80 SELF-LOCK HOOK 80级自锁钩

**With side trigger  
开关在侧向**



- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Red(红色)RAL3020/Yellow (黄色) RAL1003

- ◆ Positive lock latch is Self-Locking when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全

### SLR663-G80 SELF-LOCKING HOOK

80级埋入式羊角安全钩

**SLR663**

| ITEM CODE<br>货号 | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A±0.5 | B±0.5 | D±0.1 | E±0.5 | M±0.5 | H±0.3 | L±1.5 |
|-----------------|----------------|------------|------------|-------|-------|-------|-------|-------|-------|-------|
| SLR-663-7/8-8   | 0.792          | 2          | 8          | 31    | 9     | 10.5  | 38.5  | 90    | 20    | 164   |
| SLR-663-10-8    | 2.25           | 3.15       | 12.6       | 45    | 12    | 14.7  | 48.3  | 118   | 22    | 206   |
| SLR-663-13-8    | 4.57           | 5.3        | 21.2       | 59    | 15    | 18.5  | 60    | 153   | 33    | 260   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记           | 10                 | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |




## G80 U.S. TYPE CLEVIS SELF-LOCKING HOOK 80级美式羊角安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflex crack detection
- ◇ 100% 进行磁粉探伤
- ◆ With latch.
- ◇ 每件产品均配有保险舌片
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020  
Yellow (黄色) RAL1003
- ◆ Positive lock latch is Self-Locking when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全

### SLR009-G80 U.S. TYPE CLEVIS SELF-LOCKING HOOK 80级 美式羊角安全钩

SLR009



| ITEM NO.   | WEIGHT (Kg) | WLL (T) | B.L (T) | A ±0.5 | B ±1.5 | H ±1 | K ±2 | L ±3 | Φ ±2 |
|------------|-------------|---------|---------|--------|--------|------|------|------|------|
| 8-SLR9-6   | 0.48        | 1.2     | 4.8     | 8      | 29     | 20   | 87   | 122  | 34   |
| 8-SLR9-7/8 | 0.96        | 2       | 8       | 10     | 35     | 29   | 116  | 163  | 42   |
| 8-SLR9-10  | 1.6         | 3.2     | 12.8    | 12     | 42     | 31   | 148  | 202  | 55   |
| 8-SLR9-13  | 3.65        | 5.4     | 21.6    | 15     | 55     | 41   | 176  | 248  | 65   |
| 8-SLR9-16  | 5.5         | 8.2     | 32.8    | 18.5   | 66     | 52   | 208  | 295  | 76   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记        | 10              | -8             | WLL 3.2T                | SLR                | CE                     | 18-1              |
|----------------|-----------------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |






## G80 SPECIAL CLEVIS SELF-LOCKING HOOK 80级 异型羊角安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理) : Powder plastified (喷塑)
- ◆ Colour code (色号) : Blue (蓝色) RAL5015
- ◆ Positive lock latch is Self-Locking when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全



### SLR078-G80 SPECIAL CLEVIS SELF-LOCKING HOOK 80级 异型羊角安全钩

SLR078



| ITEM NO.    | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±1.5 | B±1.5 | E±2 | K±2   | H±1 | L±1 | Φ±2 |
|-------------|----------------|------------|------------|-------|-------|-----|-------|-----|-----|-----|
| 8-SLR78-7/8 | 0.68           | 2          | 8          | 9.5   | 35    | 34  | 131   | 22  | 150 | 40  |
| 8-SLR78-10  | 1.25           | 3.15       | 12.6       | 12.5  | 43    | 42  | 161   | 26  | 189 | 50  |
| 8-SLR78-13  | 2.15           | 5.3        | 21.2       | 15    | 50    | 50  | 195.4 | 31  | 229 | 60  |
| 8-SLR78-16  | 3.8            | 8          | 32         | 18.5  | 61    | 70  | 238   | 38  | 299 | 72  |
| 8-SLR008-16 | 5.3            | 8.2        | 32.8       | 66    | 56    | 52  | 256   | 330 | 76  |     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记        | 10              | -8             | WLL 3.15T               | SLR                | CE                     | 18-1              |
|----------------|-----------------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## ITALY TYPE CLEVIS SELF-LOCKING HOOK 意式羊角安全钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◆ 100% 进行磁粉探伤
- ◆ With latch.
- ◆ 每件产品均配有保险舌片
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Red(红色)RAL3020/Yellow (黄色) RAL1003

- ◆ Positive lock latch is SELF-LOCKING when hook is loaded.
- ◆ 在负荷下, 钩子的自锁结构会自动闭合, 更安全



SLR248-ITALY TYPE CLEVIS SELF-LOCKING HOOK  
意式羊角安全钩

SLR248



| ITEM NO.     | WEIGHT<br>(Kg) | WLL<br>(T) | B.L<br>(T) | A ± 1.5 | B ± 1.5 | E ± 2 | K ± 2 | L ± 3 | Φ ± 2 |
|--------------|----------------|------------|------------|---------|---------|-------|-------|-------|-------|
| 8-SLR248-7/8 | 0.54           | 2          | 8          | 9.5     | 29      | 30    | 94    | 132   | 35.5  |
| 8-SLR248-10  | 1.14           | 3.15       | 12.8       | 12.5    | 40      | 54    | 125   | 174   | 45    |
| 8-SLR248-16  | 3.45           | 8          | 21.6       | 18.5    | 58      | 70    | 182   | 259   | 73    |
|              |                |            |            |         |         |       |       |       |       |
|              |                |            |            |         |         |       |       |       |       |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记           | 10                 | -8                | WLL 3.2T                   | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G80 CLEVIS SELF-LOCKING HOOK 80级 羊角安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理) : Powder plastified ( 喷塑 )
- ◆ Colour code(色号) : Blue(蓝色)RAL5015
- ◆ Positive lock latch is Self-Locking when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全

### SLR335-G80 CLEVIS SELF-LOCKING HOOK 80级 羊角安全钩

SLR335



| ITEM NO.       | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A ±1.5 | B ±1.5 | K ±2  | H ±1 | L ±3 | Φ ±2 |
|----------------|----------------|------------|------------|--------|--------|-------|------|------|------|
| 8-SLR335-6     | 0.5            | 1.12       | 4.48       | 7.5    | 28     | 96    | 20   | 131  | 34   |
| 8-SLR335-7/8   | 0.8            | 2          | 8          | 9.5    | 35     | 118.5 | 24   | 160  | 46   |
| 8-SLR335-10    | 1.42           | 3.15       | 12.6       | 12     | 45     | 144   | 28   | 194  | 58   |
| 8-SLR335-13    | 3              | 5.3        | 21.2       | 15     | 54     | 181.5 | 41   | 251  | 69   |
| 8-SLR335-16    | 5.8            | 8          | 32         | 17.5   | 60.5   | 216   | 50   | 302  | 86   |
| 8-SLR335-18/20 | 8.75           | 12.5       | 50         | 25     | 74.5   | 239   | 62   | 342  | 92   |
| 8-SLR335-22    | 12.3           | 15         | 60         | 25.5   | 80     | 276   | 65   | 391  | 98   |
| 8-SLR335-26    | 20.6           | 21.2       | 84.8       | 30     | 99     | 312   | 74   | 448  | 110  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍


### Regular mark 常规标记:

| MARK 标记        | 10              | -8             | WLL 3.15T               | SLR                | CE                     | 18-1              |
|----------------|-----------------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## G80 EUROPEAN TYPE CLEVIS SELF-LOCKING HOOK 80级欧式羊角安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnetflux crack detection
- ◆ 100% 进行磁粉探伤




SLR766-G80 EUROPEAN TYPE CLEVIS SELF-LOCKING HOOK  
80 级欧式羊角安全钩

SLR766

| ITEM NO.     | WEIGHT (KG) | WLL (T) | B.L (T) | A ±0.5 | B ±1 | E ±1 | H ±1 | R ±2  | M ±2  | L ±3  |
|--------------|-------------|---------|---------|--------|------|------|------|-------|-------|-------|
| 8-SLR-766-06 | 0.5         | 1.12    | 4.48    | 7.5    | 32   | 28   | 20   | 96    | 70    | 131   |
| 8-SLR-766-08 | 0.9         | 2       | 8       | 9.5    | 36   | 35.5 | 26   | 123   | 90    | 166   |
| 8-SLR-766-10 | 1.6         | 3.15    | 12.6    | 12     | 46   | 45   | 30   | 144   | 109   | 196.5 |
| 8-SLR-766-13 | 2.9         | 5.3     | 21.2    | 15     | 59   | 53.5 | 40.5 | 182   | 138.5 | 251   |
| 8-SLR-766-16 | 5.9         | 8       | 32      | 17.5   | 70   | 62   | 50.5 | 217   | 170.5 | 303   |
| 8-SLR-766-20 | 8.6         | 12.5    | 50      | 25     | 85   | 76.5 | 62   | 235   | 192.5 | 337.5 |
| 8-SLR-766-22 | 12.1        | 15      | 60      | 25.5   | 98   | 80   | 66   | 276.5 | 205   | 391   |

## G80 CLEVIS SELF-LOCKING HOOK G80 羊角安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnetflux crack detection
- ◆ 100% 进行磁粉探伤



SLR771-CLEVIS SELF-LOCKING HOOK  
G80 羊角安全钩

SLR771

| ITEM NO.    | WEIGHT (kg) | WLL (T) | B.L (T) | A ±1 | B ±1 | E ±1 | Ø ±1 | H ±1 | K ±2 | L ±1 |
|-------------|-------------|---------|---------|------|------|------|------|------|------|------|
| 8-SLR771-08 | 0.75        | 2       | 8       | 9.5  | 37.5 | 35   | 45   | 21   | 118  | 165  |
| 8-SLR771-10 | 1.42        | 3.15    | 12.6    | 12.5 | 48   | 46   | 56   | 30.5 | 151  | 204  |
| 8-SLR771-13 | 2.56        | 5.3     | 21.2    | 15   | 52   | 56   | 64   | 39   | 176  | 244  |
| 8-SLR771-16 | 4.21        | 8       | 32      | 18.5 | 67.5 | 66   | 77   | 45   | 250  | 288  |

- ◆ Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍
- ◆ Regular mark (常规标记) : 10-8 WLL 3.2T CE SLR + BATCH NUMBER (批号)




## G80 SELF-LOCKING HOOK 80级 特殊羊角安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤

### SLR489-G80 SELF-LOCKING HOOK 80级 特殊羊角安全钩

SLR489




| ITEM NO.    | WEIGHT (kg) | WLL (T) | B.L (T) | A ±1 | B ±1 | E ±2 | E1 ±2 | L1 ±3 | L ±3 |
|-------------|-------------|---------|---------|------|------|------|-------|-------|------|
| 8-SLR489-10 | 0.92        | 3.2     | 12.8    | 12   | 43   | 65   | 44    | 118   | 169  |
|             |             |         |         |      |      |      |       |       |      |
|             |             |         |         |      |      |      |       |       |      |
|             |             |         |         |      |      |      |       |       |      |
|             |             |         |         |      |      |      |       |       |      |
|             |             |         |         |      |      |      |       |       |      |
|             |             |         |         |      |      |      |       |       |      |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

## G80 ANGLE ROTATED SAFETY HOOK 80级 羊角旋转安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ With bearing 带轴承



### SLR007-G80 ANGLE ROTATED SAFETY HOOK 80级 羊角旋转安全钩

SLR007

| ITEM NO.     | WEIGHT (KG) | WLL (T) | B.L (T) | Φ     | B      | C       | L        | K      | E     | F     |
|--------------|-------------|---------|---------|-------|--------|---------|----------|--------|-------|-------|
| 8-SLR007-06  | 0.78        | 1.12    | 4.48    | 34 ±1 | 8 ±1   | 32 ±2   | 181.5 ±6 | 146 ±5 | 32 ±2 | 28 ±2 |
| 8-SLR007-7/8 | 1.3         | 2       | 8       | 44 ±1 | 9.5 ±1 | 36.5 ±2 | 230 ±7   | 189 ±6 | 45 ±2 | 35 ±2 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍


- Regular mark(常规标记): 7/8-8 WLL2T CE SLR + BATCH NUMBER(批号)



## G80 SELF-LOCK HOOK 80级自锁钩

- ◆ Forged super alloy steel- Quenched and Tempered.
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理。
- ◆ Suitable for EN818-2 G80 chain.
- ◇ 与EN818-2标准80级链条配合使用。
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◇ 逐件按工作拉力的2.5倍进行验证测试。
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试。
- ◆ Breakage test for every batch product to perform the sampling break test.
- ◆ 100% magnaflex crack detection.
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish(表面处理): Powder plastified (喷漆)
- ◆ Colour code(色号): Red(红色) RAL3020  
Yellow(黄色) RAL1003.

- ◆ Positive lock latch is Self-Locking when hook is loaded
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全
- ◆ With bearing 带轴承



### SLR042-SWIVEL SELF-LOCK HOOK WITH BEARING

#### 带轴承旋转安全钩

SLR042

| ITEM NO.     | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A      | B        | C      | L1      | L     | T      | E     | M2      | N      | φ±1.5 |
|--------------|----------------|------------|------------|--------|----------|--------|---------|-------|--------|-------|---------|--------|-------|
| 8-SLR-42-06  | 0.71           | 1.12       | 4.48       | 32.5±1 | 11.5±0.5 | 33.8±2 | 160±3   | 194±3 | 28±1   | 32±2  | 73±2    | 15±0.5 | 34    |
| 8-SLR-42-7/8 | 1.1            | 2          | 8          | 36±1   | 13±0.5   | 40±2   | 202±3   | 240±3 | 35±1   | 40±3  | 91±2    | 20±0.5 | 44    |
| 8-SLR-42-10  | 2.1            | 3.15       | 12.6       | 42±1   | 15.5±0.5 | 48±2   | 237±3   | 283±3 | 45±2   | 48±3  | 108±2   | 26±1   | 58    |
| 8-SLR-42-13  | 4              | 5.3        | 21.2       | 50±2   | 17±1     | 58±3   | 282±4   | 343±4 | 52.5±2 | 57±3  | 142±3   | 33±1   | 70    |
| 8-SLR-42-16  | 7.3            | 8          | 32         | 61±2   | 21.5±1   | 60±3   | 341.5±4 | 419±4 | 63±2   | 65±4  | 168.6±3 | 38±2   | 86    |
| 8-SLR-42-20  | 11.6           | 12.5       | 50         | 76±3   | 26.5±1   | 75.5±3 | 399.5   | 483±5 | 82±3   | 82±4  | 185±4   | 50±2   | 97    |
| 8-SLR-42-22  | 16             | 15         | 60         | 97±3   | 33±2     | 97±4   | 466±5   | 564±5 | 76±3   | 80±5  | 202±4   | 52±2   | 98    |
| 8-SLR-42-26  | 21.5           | 21.2       | 84.8       | 123±4  | 42±2     | 115±4  | 544±6   | 661±6 | 96±4   | 109±5 | 239±5   | 60±3   | 110   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记           | 10                 | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产厂标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G80 U.S. TYPE SWIVEL SELF-LOCKING HOOK 80级 美式旋转安全钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ With latch.
- ◇ 每件产品均配有保险舌片
- ◆ Surface finish (表面处理) : Powder plastified (喷塑)
- ◆ Colour code (色号) : Red (红色) RAL3020
- Yellow (黄色) RAL1003

- ◆ Positive lock latch is Self-Locking when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全
- ◆ Can be Rotated under Non-load Conditions!
- ◇ 非承载条件下可旋转调节方向!

### SLR010-G80 U.S. TYPE SWIVEL SELF-LOCKING HOOK

SLR010

#### 80级 美式旋转安全钩



| ITEM NO.    | WEIGHT (Kg) | WLL (T) | B.L (T) | A±0.5 | B±1.5 | C±2 | D±1  | H±1 | K±2 | L±3 | Φ±2 |
|-------------|-------------|---------|---------|-------|-------|-----|------|-----|-----|-----|-----|
| 8-SLR10-7/8 | 1.2         | 2       | 8       | 28    | 35    | 36  | 13   | 29  | 116 | 163 | 42  |
| 8-SLR10-10  | 2           | 3.2     | 12.8    | 35.5  | 42    | 42  | 15.5 | 31  | 218 | 265 | 55  |
| 8-SLR10-13  | 4.5         | 5.4     | 21.6    | 41    | 55    | 50  | 17   | 41  | 261 | 319 | 65  |
| 8-SLR10-16  | 7.36        | 8.2     | 32.8    | 50    | 66    | 70  | 21.5 | 52  | 326 | 399 | 76  |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 10-8 WLL3.2T CE SLR + BATCH NUMBER (批号)

### SLR010-G80 U.S. TYPE SWIVEL SELF-LOCKING HOOK

SLR010

#### 80级 美式旋转安全钩 A型



| ITEM NO.      | WEIGHT (Kg) | WLL (T) | B.L (T) | A±0.5 | B±1.5 | C±2 | D±1  | H±1 | K±2 | L±3 | Φ±2 |
|---------------|-------------|---------|---------|-------|-------|-----|------|-----|-----|-----|-----|
| 8-SLR10-7/8-A | 0.8         | 2       | 8       | M16   | 35    | 34  | 16.5 | 29  | 144 | 173 | 42  |
|               |             |         |         |       |       |     |      |     |     |     |     |
|               |             |         |         |       |       |     |      |     |     |     |     |
|               |             |         |         |       |       |     |      |     |     |     |     |
|               |             |         |         |       |       |     |      |     |     |     |     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 10-8 WLL3.2T CE SLR + BATCH NUMBER (批号)



## G80 SPECIAL SWIVEL SELF-LOCKING HOOK 80级 异型旋转安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for G80 chain
- ◇ 与80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflix crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Blue(蓝色)RAL5015


- ◆ Positive lock latch is Self-Locking when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全
- ◆ Can be Rotated under Non-load Conditions!
- ◇ 非承载条件下可旋转调节方向!



### SLR343-G80 SPECIAL SWIVEL SELF-LOCKING HOOK 80级 异型旋转安全钩

SLR343

| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | A±2  | B±2  | C±1  | D±0.5 | E±2 | H±1 | K±3 | L±3   | Φ±2 |
|--------------|-------------|---------|---------|------|------|------|-------|-----|-----|-----|-------|-----|
| 8-SLR343-6   | 0.75        | 1.12    | 4.48    | 24   | 32.8 | 32.5 | 11.5  | 25  | 19  | 159 | 189.5 | 36  |
| 8-SLR343-7/8 | 1.02        | 2       | 8       | 27.5 | 35   | 36   | 13    | 34  | 22  | 181 | 216   | 40  |
| 8-SLR343-10  | 1.75        | 3.15    | 12.6    | 34   | 43   | 42   | 15.5  | 42  | 26  | 213 | 254   | 50  |
| 8-SLR343-13  | 2.72        | 5.3     | 21.2    | 41   | 50   | 50   | 17    | 50  | 31  | 252 | 300   | 60  |
| 8-SLR343-16  | 5.38        | 8       | 32      | 58   | 61   | 70   | 21.5  | 69  | 38  | 325 | 375   | 72  |



Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

### Regular mark 常规标记:

| MARK 标记        | 10              | -8             | WLL 3.15T               | SLR                | CE                     | 18-1              |
|----------------|-----------------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |





## G80 U.S. TYPE SHANK SELF-LOCKING HOOK 80级 美式直杆安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ With latch.
- ◇ 每件产品均配有保险舌片
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- Yellow (黄色) RAL1003

- ◆ Positive lock latch is SELF-LOCKING when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全

### SLR011-G80 U.S. TYPE SHANK SELF-LOCKING HOOK 80级 美式直杆安全钩

SLR011




| ITEM NO.    | WEIGHT<br>(Kg) | WLL<br>(T) | B.L<br>(T) | A±0.5 | B±1.5 | C±2  | H±1 | L±3 | Φ±2 |
|-------------|----------------|------------|------------|-------|-------|------|-----|-----|-----|
| 8-SLR11-7/8 | 1.27           | 2          | 8          | 25.4  | 35    | 61.5 | 29  | 199 | 42  |
| 8-SLR11-10  | 2.15           | 3.2        | 12.8       | 29    | 42    | 76.5 | 31  | 243 | 55  |
|             |                |            |            |       |       |      |     |     |     |
|             |                |            |            |       |       |      |     |     |     |
|             |                |            |            |       |       |      |     |     |     |
|             |                |            |            |       |       |      |     |     |     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL3.2T CE SLR + BATCH NUMBER (批号)

### SLR657-G80 SHANK SELF-LOCKING HOOK 80级 欧式直杆安全钩

SLR657



| ITEM NO.   | WEIGHT<br>(Kg) | WLL<br>(T) | B.L<br>(T) | A±0.5 | B±1.5 | C±1 | D±0.5 | H±1 | K±2 | L±3 | Φ±2 |
|------------|----------------|------------|------------|-------|-------|-----|-------|-----|-----|-----|-----|
| 8-SLR657-6 | 0.3            | 1.12       | 4.48       | M12   | 28    | 31  | 13    | 20  | 124 | 144 | 34  |
|            |                |            |            |       |       |     |       |     |     |     |     |
|            |                |            |            |       |       |     |       |     |     |     |     |
|            |                |            |            |       |       |     |       |     |     |     |     |
|            |                |            |            |       |       |     |       |     |     |     |     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 6-8 WLL1.12T CE SLR + BATCH NUMBER (批号)




## G80 SWIVEL SELF-LOCKING HOOK WITH BEARING 80级 带轴承旋转安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
  - ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
  - ◆ Suitable for EN1818-2 G80 chain
  - ◇ 与EN1818-2标准80级链条配合使用
  - ◆ Individually proof test at 2.5 times Working Load Limit
  - ◇ 逐件按工作拉力的2.5倍进行验证测试
  - ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
  - ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
  - ◆ Breakage test
  - ◇ 对每一批次产品进行严格的抽样破坏测试
  - ◆ 100% magnafix crack detection
  - ◇ 100% 进行磁粉探伤
  - ◆ Surface finish (表面处理) : Powder plastified (喷塑)
  - ◆ Colour code(色号) : Blue(蓝色)RAL5015
- ◆ Positive lock latch is Self-Locking when hook is loaded.
  - ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全
  - ◆ Can be Rotated under Non-load Conditions!
  - ◇ 非承载条件下可旋转调节方向!

### SLR490-G80 SWIVEL SELF-LOCKING HOOK WITH BEARING 80级 带轴承旋转安全钩

**SLR490**



| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | A±0.5 | B±1.5 | C±2  | D±1  | K±2   | H±1 | L±3   | Φ±2 |
|--------------|-------------|---------|---------|-------|-------|------|------|-------|-----|-------|-----|
| 8-SLR490-6   | 0.74        | 1.12    | 4.48    | 37    | 28    | 32.5 | 11.5 | 161   | 20  | 196   | 34  |
| 8-SLR490-7/8 | 1.23        | 2       | 8       | 45    | 35    | 36   | 13   | 201.6 | 24  | 242   | 46  |
| 8-SLR490-10  | 2.04        | 3.15    | 12.6    | 54    | 45    | 42   | 15.5 | 238   | 28  | 284.5 | 58  |
| 8-SLR490-13  | 3.76        | 5.3     | 21.2    | 63.5  | 54    | 50   | 17   | 284   | 41  | 345   | 69  |
| 8-SLR490-16  | 7.52        | 8       | 32      | 67.5  | 60.5  | 61   | 21.5 | 347   | 50  | 422   | 86  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍


### Regular mark 常规标记:

| MARK 标记        | 10              | -8             | WLL 3.15T               | SLR                | CE                     | 18-1              |
|----------------|-----------------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | CHAIN SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## G80 SELF-LOCK HOOK 80级自锁钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤
- ◆ Can be Rotated under Non-load Conditions!
- ◇ 非承载条件下可旋转调节方向!



### SLR-767 G80 EUROPEAN TYPE SWIVEL SELF-LOCKING HOOK 80 级欧式旋转安全钩


**SLR767**

| ITEM NO.    | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | B ± 1.5 | C ± 2 | D ± 1 | E ± 1.5 | H ± 1 | M ± 2 | L ± 3.5 |
|-------------|----------------|------------|------------|---------|-------|-------|---------|-------|-------|---------|
| 8-SLR767-06 | 0.6            | 1.12       | 4.48       | 32.5    | 23    | 11.5  | 28      | 20    | 70    | 184     |
| 8-SLR767-08 | 1.1            | 2          | 8          | 36      | 28.5  | 13    | 36      | 26    | 90    | 226     |
| 8-SLR767-10 | 2              | 3.15       | 12.6       | 42      | 35    | 15.5  | 45      | 30    | 109   | 269     |
| 8-SLR767-13 | 4              | 5.3        | 21.2       | 50      | 41    | 17    | 53.5    | 40.5  | 138.5 | 327     |
| 8-SLR767-16 | 6.8            | 8          | 32         | 71      | 58    | 21.5  | 61      | 50.5  | 170.5 | 413     |
| 8-SLR767-20 | 12.5           | 12.5       | 50         | 72      | 63    | 26    | 76.5    | 62    | 192.5 | 460     |
| 8-SLR767-22 | 17.1           | 15         | 60         | 97      | 98    | 33    | 80      | 65    | 205   | 566     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 6-8 WLL 1.12T CE SLR + BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤
- ◆ Can be Rotated under Non-load Conditions!
- ◇ 非承载条件下可旋转调节方向!



### SLR772-SWIVEL SELF-LOCKING HOOK G80 型式旋转安全钩

**SLR772**

| ITEM NO.    | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A ± 2 | B ± 2.5 | C ± 1 | D ± 0.5 | E ± 0.5 | F ± 1 | G  | H ± 0.5 | K ± 2.5 |
|-------------|----------------|------------|------------|-------|---------|-------|---------|---------|-------|----|---------|---------|
| 8-SLR772-08 | 1.03           | 2          | 8          | 214   | 28.5    | 36    | 13      | 45      | 37    | 32 | 21      | 179     |
| 8-SLR772-10 | 1.8            | 3.15       | 12.6       | 264   | 39      | 42    | 15.5    | 55.5    | 47.5  | 46 | 30.5    | 219     |
| 8-SLR772-13 | 3.34           | 5.3        | 21.2       | 334   | 46      | 49    | 19      | 64      | 52.5  | 56 | 39      | 276     |
| 8-SLR772-16 | 5.83           | 8          | 32         | 400   | 69      | 62    | 23      | 80      | 70    | 91 | 45      | 323     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 6-8 WLL 1.12T CE SLR + BATCH NUMBER (批号)



## G80 SELF-LOCK HOOK FOR WEB SLING WITH HALF LINK 80级 带半环吊带自锁钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 每件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflix crack detection
- ◇ 100% 进行磁粉探伤
- ◆ With latch.
- ◇ 每件产品均配有保险舌片
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020  
Yellow (黄色) RAL1003



- ◆ Positive lock latch is SELF-LOCKING when hook is loaded.
- ◇ 在负荷下，钩子的自锁结构会自动闭合，更安全

### SLR110-G80 SELF-LOCK HOOK FOR WEB SLING WITH HALF LINK 80级 带半环吊带自锁钩

**SLR110**



| ITEM NO.<br>货号 | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±1.5 | H±1  | W±1.5 | T±1 | D±1.5 | L±3 |
|----------------|----------------|------------|------------|-------|------|-------|-----|-------|-----|
| 8-SLR110-10    | 1.8            | 3.15       | 12.6       | 26.8  | 28.5 | 47    | 16  | 58    | 199 |
| 8-SLR110-13    | 3.52           | 5.3        | 21.2       | 30    | 40   | 51.5  | 19  | 70    | 256 |
|                |                |            |            |       |      |       |     |       |     |
|                |                |            |            |       |      |       |     |       |     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)


### Regular mark 常规标记:

| MARK 标记           | 10                 | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | CHAIN SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作应力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G80 SELF-LOCK HOOK 80级自锁钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理):
- ◇ Powder plastified (喷漆)
- ◆ Colour code(色号): Red (红色) RAL3020  
Yellow (黄色) RAL1003



### SLR089-G80 SHORT CLEVIS SELF-LOCK HOOK FOR WEB SLING 短体羊角吊带自锁钩


**SLR089**

| ITEM NO.<br>货号 | WEIGHT<br>(kg)<br>单重 | WLL<br>(T)<br>工作拉力 | B.L<br>(T) | E ± 2 | A ± 2 | B ± 1.5 | L ± 2 | M ± 2 | T ± 1.5 |
|----------------|----------------------|--------------------|------------|-------|-------|---------|-------|-------|---------|
| 8-SLR089-2.2T  | 1.94                 | 2.2                | 8.8        | 32    | 98    | 65      | 186   | 129   | 50      |
|                |                      |                    |            |       |       |         |       |       |         |
|                |                      |                    |            |       |       |         |       |       |         |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): WLL2.2T CE SLR + BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷漆)
- ◆ Colour code(色号): Red (红色)RAL3020  
Yellow (黄色) RAL1003



### SLR236-G80 LONG CLEVIS SELF-LOCK HOOK FOR WEB SLING 长体羊角吊带自锁钩

**SLR236**

| ITEM NO.<br>货号 | WEIGHT<br>(kg)<br>单重 | WLL<br>(T)<br>工作拉力 | B.L<br>(T) | A ± 1.5 | E ± 1.5 | L ± 3 |
|----------------|----------------------|--------------------|------------|---------|---------|-------|
| 8-SLR236-2.2T  | 2.2                  | 2.2                | 8.8        | 64      | 50      | 245   |
|                |                      |                    |            |         |         |       |
|                |                      |                    |            |         |         |       |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): WLL2.2T CE SLR + BATCH NUMBER (批号)



## CLEVIS SLING HOOK


### 羊角滑钩

- ◆ Forged super alloy steel- Quenched and Tempered.
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理。
- ◆ Suitable for EN818-2 G80 chain.
- ◆ 与EN818-2标准80级链条配合使用。
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◆ 逐件按工作拉力的2.5倍进行验证测试。
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试。
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection.
- ◆ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◆ 所有销轴进行100%测试，确保相同的硬度品质。
- ◆ With cast latch. 每件产品均配有铸造保险舌片。
- ◆ Surface finish(表面处理) : Powder plastified (喷塑)
- ◆ Colour code(色号) : Red(红色) RAL3020 / Yellow(黄色) RAL1003.



#### SLR012 - G80 CLEVIS SLING HOOK WITH CAST LATCH 80级羊角滑钩

SLR012



| ITEM No.  | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A ±0.5 | B ±1.5 | D ±1 | H ±2 | L ±1 | E ±2 |
|-----------|----------------|------------|------------|--------|--------|------|------|------|------|
| SLR12-6   | 0.32           | 1.12       | 4.48       | 8      | 32     | 35   | 23   | 76   | 26   |
| SLR12-7/8 | 0.48           | 2          | 8          | 9.5    | 37     | 37   | 25   | 86.4 | 29   |
| SLR12-10  | 0.95           | 3.15       | 12.6       | 12.5   | 49     | 46   | 31   | 104  | 39   |
| SLR12-13  | 1.8            | 5.3        | 21.2       | 16.5   | 56.5   | 56   | 42.5 | 128  | 47.5 |
| SLR12-16  | 3.4            | 8          | 32         | 21.5   | 70.5   | 60   | 54   | 150  | 56   |
| SLR12-20  | 6              | 12.5       | 50         | 24     | 77     | 79   | 58   | 180  | 59   |
| SLR12-22  | 10.4           | 15         | 60         | 26     | 91     | 101  | 62   | 213  | 72   |
| SLR12-26  | 14.5           | 21.2       | 84.8       | 30     | 117    | 115  | 75   | 250  | 101  |
| SLR12-32  | 27             | 31.5       | 126        | 35     | 150    | 140  | 88   | 317  | 124  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark(常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

#### SP-SLR012 - LOAD PIN 销轴配件 (销轴+弹性圆柱销)



| ITEM CODE | SIZE  | ITEM CODE | SIZE |
|-----------|-------|-----------|------|
| SLR12-6   | 6-8   | SLR12-20  | 20-8 |
| SLR12-7/8 | 7/8-8 | SLR12-22  | 22-8 |
| SLR12-10  | 10-8  | SLR12-26  | 26-8 |
| SLR12-13  | 13-8  | SLR12-32  | 32-8 |
| SLR12-16  | 16-8  |           |      |

#### SP-SLR012 - CAST LATCH KIT 铸造舌片配件 (铸造舌片+弹簧+螺丝+螺母)



| ITEM CODE | SIZE  | ITEM CODE | SIZE |
|-----------|-------|-----------|------|
| SLR12-6   | 6-8   | SLR12-20  | 20-8 |
| SLR12-7/8 | 7/8-8 | SLR12-22  | 22-8 |
| SLR12-10  | 10-8  | SLR12-26  | 26-8 |
| SLR12-13  | 13-8  | SLR12-32  | 32-8 |
| SLR12-16  | 16-8  |           |      |



## CLEVIS SLING HOOK

### 羊角滑钩

- ◆ Forged super alloy steel- Quenched and Tempered.
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理。
- ◆ Suitable for EN818-2 G80 chain.
- ◇ 与EN818-2标准80级链条配合使用。
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◇ 逐件按工作拉力的2.5倍进行验证测试。
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试。
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◇ 100% magnaflux crack detection.
- ◇ 100% 进行磁粉探伤
- ◆ With latch. 每件产品均配有保险舌片。
- ◇ Surface finish(表面处理) : Powder plastified (喷塑)
- ◆ Colour code(色号) : Red(红色) RAL3020 / Yellow(黄色) RAL1003.



**SLR333 – G80 CLEVIS SLING HOOK WITH CAST LATCH**  
80级欧式羊角滑钩

**SLR333**



| ITEM NO.          | WEIGHT (kg) | WLL (T) | B.L (T) | A±0.5 | B±1.2 | E±1  | H±2  | M±1   | L±2   |
|-------------------|-------------|---------|---------|-------|-------|------|------|-------|-------|
| <b>SLR333-6</b>   | 0.3         | 1.12    | 4.48    | 8     | 32    | 19.5 | 20   | 68    | 108   |
| <b>SLR333-7/8</b> | 0.55        | 2       | 8       | 9.5   | 38.5  | 24   | 25   | 87.4  | 129.5 |
| <b>SLR333-10</b>  | 0.96        | 3.15    | 12.6    | 12.5  | 48    | 28   | 36   | 106.7 | 163.5 |
| <b>SLR333-13</b>  | 1.52        | 5.3     | 21.2    | 16    | 56    | 35   | 41.6 | 130   | 195.5 |
| <b>SLR333-16</b>  | 3.43        | 8       | 32      | 18.5  | 65.5  | 43   | 46.2 | 155.5 | 236   |
| <b>SLR333-20</b>  | 6.73        | 12.5    | 50      | 24.5  | 92    | 51.6 | 51   | 180   | 281   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

**SP-SLR333 – LOAD PIN 销轴配件(销轴+弹性圆柱销)**



| ITEM CODE<br>货号      | SIZE<br>规格 | ITEM CODE<br>货号     | SIZE<br>规格 |
|----------------------|------------|---------------------|------------|
| <b>SP-SLR333-6</b>   | 6-8        | <b>SP-SLR333-20</b> | 20-8       |
| <b>SP-SLR333-7/8</b> | 7/8-8      |                     |            |
| <b>SP-SLR333-10</b>  | 10-8       |                     |            |
| <b>SP-SLR333-13</b>  | 13-8       |                     |            |
| <b>SP-SLR333-16</b>  | 16-8       |                     |            |

### Regular mark 常规标记:

| MARK 标记           | 10           | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | SIZE<br>铭表尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## CLEVIS SLING HOOK 羊角滑钩


- ◆ Forged super alloy steel- Quenched and Tempered.
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理。
- ◆ Suitable for EN818-2 G80 chain.
- ◆ 与EN818-2标准80级链条配合使用。
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◆ 逐件按工作拉力的2.5倍进行验证测试。
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试。
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection.
- ◆ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◆ 所有销轴进行100%测试，确保相同的硬度品质。
- ◆ With cast latch. 每件产品均配有铸造保险舌片。
- ◆ Surface finish(表面处理) : Powder plastified (喷塑)
- ◆ Colour code(色号) : Red(红色) RAL3020 / Yellow(黄色) RAL1003.



### SLR247-ITALIAN TYPE CLEVIS SLIP HOOK

意式羊角滑钩

**SLR247**



| ITEM NO.      | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A ±2 | B ±2 | E ±2 | M ±3 | L ±3 |
|---------------|----------------|------------|------------|------|------|------|------|------|
| 8-SLR-247-7/8 | 0.55           | 2          | 8          | 9.5  | 38.5 | 25.9 | 87.4 | 129  |
| 8-SLR-247-10  | 1.26           | 3.15       | 12.6       | 12.5 | 40.5 | 32   | 110  | 166  |
| 8-SLR-247-13  | 2.1            | 5.3        | 21.2       | 15.5 | 53   | 41   | 133  | 205  |
| 8-SLR-247-16  | 3.32           | 8          | 32         | 18.5 | 65.5 | 44   | 155  | 240  |
|               |                |            |            |      |      |      |      |      |
|               |                |            |            |      |      |      |      |      |
|               |                |            |            |      |      |      |      |      |
|               |                |            |            |      |      |      |      |      |
|               |                |            |            |      |      |      |      |      |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

### Regular mark 常规标记:

| MARK 标记        | 10        | -8             | WLL 3.15T               | SLR                | CE                     | 18-1              |
|----------------|-----------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |





## CLEVIS SLING HOOK

### 羊角滑钩


- ◆ Forged super alloy steel-Quenched and Tempered
  - ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
  - ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
  - ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 time working load limit for 20000 cycles
  - ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
  - ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
  - ◇ 100%进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
  - ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理): ◇ Powder plastified (喷塑)
  - ◇ Colour code (色号):
    - ◇ Red (红色) RAL3020
    - ◇ Yellow (黄色) RAL1003



### SLR104-CLEVIS SLING HOOK

#### 羊角滑钩

**SLR104**



| ITEM NO.      | WEIGHT (KG) | WLL (T) | B.L (T) | A±2  | B±2  | M±2  | H±3  | K±3 | L±3 |
|---------------|-------------|---------|---------|------|------|------|------|-----|-----|
| 8-SLR-104-6   | 0.4         | 1.5     | 6       | 7    | 31   | 16   | 20.5 | 77  | 110 |
| 8-SLR-104-7/8 | 0.54        | 2       | 8       | 9.2  | 35   | 20   | 22   | 94  | 134 |
| 8-SLR-104-10  | 1           | 3.15    | 12.6    | 12.5 | 48   | 23.5 | 29.5 | 111 | 163 |
| 8-SLR-104-13  | 1.88        | 5.3     | 21.2    | 16.5 | 57   | 32   | 38   | 139 | 206 |
| 8-SLR-104-16  | 3.35        | 8       | 32      | 18.5 | 74   | 34.5 | 48.6 | 163 | 246 |
| 8-SLR-104-20  | 7.55        | 12.8    | 51.2    | 24   | 81.5 | 42   | 71   | 198 | 306 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

### Regular mark 常规标记:

| MARK 标记        | 10        | -8             | WLL 3.15T               | SLR                | CE                     | 18-1              |
|----------------|-----------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## HORNS LOADING HOOK 羊角加载钩


- ◆ Forged super alloy steel-Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 time working load limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnetflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理): ◇ Powder plastified (喷塑)
- ◆ Colour code (色号):
- ◇ Red (红色) RAL3020
- ◇ Yellow (黄色) RAL1003



### SLR312-HORNS LOADING HOOK

#### 羊角加载钩

**SLR312**



| ITEM NO.      | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A±2  | B±2  | E±2  | M±3   | L±3   |
|---------------|----------------|------------|------------|------|------|------|-------|-------|
| 8-SLR-312-06  | 0.43           | 1.12       | 4.48       | 8    | 31   | 23   | 75    | 122   |
| 8-SLR-312-7/8 | 0.66           | 2          | 8          | 9.5  | 37   | 26   | 84    | 137   |
| 8-SLR-312-10  | 1.1            | 3.15       | 12.6       | 12.5 | 47.5 | 34   | 109   | 175.5 |
| 8-SLR-312-13  | 2.4            | 5.3        | 21.2       | 16   | 61.5 | 40   | 134.5 | 219   |
| 8-SLR-312-16  | 4.45           | 8          | 32         | 18.5 | 75   | 47.5 | 158.5 | 254   |
|               |                |            |            |      |      |      |       |       |
|               |                |            |            |      |      |      |       |       |
|               |                |            |            |      |      |      |       |       |
|               |                |            |            |      |      |      |       |       |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)


#### Regular mark 常规标记:

| MARK 标记           | 10           | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G80 CLEVIS HOOKS 80级 羊角钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



SLR848-G80 CLEVIS SLING HOOK WITH LATCH  
YOKE羊角滑钩

**SLR848**

| ITEM NO.              | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±1  | B±1  | C±1  | E±1.5 | M±2   | N±1  | H±1  | L±3   |
|-----------------------|----------------|------------|------------|------|------|------|-------|-------|------|------|-------|
| <b>8-SLR848-6</b>     | 0.3            | 1.12       | 4.48       | 8    | 28.8 | 18   | 23    | 66    | 15.5 | 19.2 | 112.2 |
| <b>8-SLR848-7/8</b>   | 0.585          | 2          | 8          | 9    | 33   | 20   | 26    | 84    | 20   | 24.8 | 140   |
| <b>8-SLR848-10</b>    | 1.19           | 3.15       | 12.6       | 12   | 44   | 25.5 | 33    | 103   | 24   | 28   | 147.5 |
| <b>8-SLR848-13</b>    | 2.32           | 5.3        | 21.2       | 15   | 57   | 34   | 40    | 133.3 | 38   | 38   | 213.6 |
| <b>8-SLR848-16</b>    | 3.82           | 8          | 32         | 18.5 | 67   | 41.5 | 44    | 161   | 41.5 | 41   | 250   |
| <b>8-SLR848-18/20</b> | 6.77           | 12.5       | 50         | 23   | 80   | 51   | 53    | 187   | 48   | 50   | 292   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

### Regular mark 常规标记:

| MARK 标记           | 10           | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | SIZE<br>铭条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G80 CLEVIS SLIP HOOK

### 羊角滑钩


- ◆ Forged super alloy steel-Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 time working load limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnetflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理): ◇ Powder plastified (喷塑)
- ◆ Colour code (色号):
- ◇ Red (红色) RAL3020
- ◇ Yellow (黄色) RAL1003



### SLR329-G80 CLEVIS SLIP HOOK

#### 羊角滑钩

**SLR329**



| ITEM NO.      | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A±2  | B±2 | E±2  | M±3 | N±3  | H±3  | L±3   | K±3   |
|---------------|----------------|------------|------------|------|-----|------|-----|------|------|-------|-------|
| 8-SLR-329-06  | 0.3            | 1.12       | 4.48       | 7.5  | 32  | 22   | 74  | 18   | 20.5 | 121   | 85    |
| 8-SLR-329-7/8 | 0.5            | 2          | 8          | 9.5  | 36  | 25   | 83  | 18   | 23.5 | 137   | 94    |
| 8-SLR-329-10  | 0.95           | 3.15       | 12.6       | 12   | 46  | 34   | 107 | 20   | 30   | 172.5 | 120   |
| 8-SLR-329-13  | 1.89           | 5.3        | 21.2       | 15   | 59  | 41.5 | 134 | 29.5 | 37.5 | 210.5 | 145   |
| 8-SLR-329-16  | 3.45           | 8          | 32         | 17.5 | 70  | 46   | 158 | 34   | 42.5 | 248   | 170   |
| 8-SLR-329-20  | 6.5            | 12.5       | 50         | 23   | 80  | 52   | 189 | 45   | 54   | 309   | 216.5 |
| 8-SLR-329-22  | 9.65           | 15         | 60         | 25.5 | 98  | 60   | 239 | 44   | 76   | 375.5 | 252   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL.3.15T CE SLR + BATCH NUMBER (批号)

### Regular mark 常规标记:

| MARK 标记           | 10           | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | SIZE<br>链夹尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## CLEVIS SLING HOOK

### 羊角滑钩


- ◆ Forged super alloy steel-Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 time working load limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100%进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理) : Powder plastified (喷塑)
- ◆ Colour code (色号) : Red (红色) RAL3020
- Yellow (黄色) RAL1003



#### SLR069-CLEVIS SLING HOOK

##### 羊角滑钩

**SLR069**



| ITEM NO.     | WEIGHT<br>(LBS) | WLL<br>(lbs) | B.L<br>(lbs) | A ±2 | B ±2  | E ±2 | C ±3 | L ±3  |
|--------------|-----------------|--------------|--------------|------|-------|------|------|-------|
| 8-SLR-69-1/4 | 1.1             | 3500         | 14000        | 11.5 | 89    | 29   | 42   | 137.5 |
| 8-SLR-69-3/8 | 2.65            | 7100         | 28400        | 14.5 | 117   | 38   | 52   | 179   |
| 8-SLR-69-1/2 | 4.96            | 12000        | 48000        | 17.8 | 139   | 47   | 61   | 217.5 |
| 8-SLR-69-5/8 | 8.15            | 18100        | 72400        | 28.8 | 161.5 | 52   | 70   | 253   |
| 8-SLR-69-3/4 | 12.12           | 28300        | 113200       | 24.5 | 187   | 56   | 82.6 | 294   |
|              |                 |              |              |      |       |      |      |       |
|              |                 |              |              |      |       |      |      |       |
|              |                 |              |              |      |       |      |      |       |
|              |                 |              |              |      |       |      |      |       |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍  
Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

#### Regular mark 常规标记:

| MARK 标记        | 3/8       | -8             | WLL 3.2T                | SLR                | CE                     | 18-1              |
|----------------|-----------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## G80 CLEVIS GRAB HOOK 80级 羊角滑钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ 100% magnaflix crack detection
- ◇ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- ◆ Yellow (黄色) RAL1003.



### SLR014-CLEVIS SLING HOOK

羊角滑钩

SLR014



| ITEM NO.     | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A±2  | B±2  | E±2 | H±3  | K±3 | L±3   |
|--------------|----------------|------------|------------|------|------|-----|------|-----|-------|
| 8-SLR-14-6/7 | 0.55           | 1.6        | 6.4        | 8    | 36   | 24  | 28   | 100 | 144   |
| 8-SLR-14-7   | 0.72           | 1.6        | 6.4        | 9    | 37.5 | 31  | 32   | 105 | 153   |
| 8-SLR-14-8   | 0.91           | 2          | 8          | 10   | 42   | 30  | 32.5 | 117 | 168   |
| 8-SLR-14-10  | 1.42           | 3.15       | 12.6       | 12   | 50   | 32  | 41   | 128 | 191.5 |
| 8-SLR-14-13  | 3.3            | 5.3        | 21.1       | 15   | 60   | 40  | 49   | 177 | 254.5 |
| 8-SLR-14-16  | 4.9            | 8          | 32         | 18.5 | 67   | 55  | 48.5 | 222 | 289   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力


- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)



## CLEVIS SLING HOOK

### 羊角滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection ◇ 100% 进行磁粉探伤



#### SLR680-CLEVIS SLING HOOK

##### 羊角滑钩


**SLR680**

| ITEM NO.     | WEIGHT (KG) | WLL (LBS) | B.L (LBS) | A ±2 | B ±2 | E ±2 | M ±3 | L ±3 |
|--------------|-------------|-----------|-----------|------|------|------|------|------|
| 8-SLR-680-10 | 1.2         | 7100      | 28400     | 48   | 12.5 | 33.7 | 112  | 178  |
|              |             |           |           |      |      |      |      |      |
|              |             |           |           |      |      |      |      |      |
|              |             |           |           |      |      |      |      |      |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 10-8 WLL2T CE SLR

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



#### SLR564 - G80 UK TYPE CLEVIS HOOK

##### UK 羊角钩

**SLR564**

| ITEM NO.   | WEIGHT (KG) | WLL (T) | B.L (T) | A ±0.5 | B ±1 | R  | E ±1 | F  | Ø    | H ±0.5 | M ±1 | L ±2 |
|------------|-------------|---------|---------|--------|------|----|------|----|------|--------|------|------|
| 8-SLR564-8 | 0.65        | 2       | 8       | 9.5    | 38.5 | 86 | 35   | 28 | 25.5 | 22     | 95   | 140  |
|            |             |         |         |        |      |    |      |    |      |        |      |      |
|            |             |         |         |        |      |    |      |    |      |        |      |      |
|            |             |         |         |        |      |    |      |    |      |        |      |      |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)



## G80 CLEVIS GRAB HOOK 80级 羊角滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflix crack detection
- ◇ 100% 进行磁粉探伤



### SLR883-DINIMA CLEVIS SLING HOOK


迪你玛羊角吊钩

**SLR883**

| ITEM NO. | WEIGHT/KG | WLL/T | B.L/T | A+1.50 | B±2 | C±1  | E±2 | L±3 | K±3 | M±2 | N±0.5 | H±0.5 |
|----------|-----------|-------|-------|--------|-----|------|-----|-----|-----|-----|-------|-------|
| 20MT     | 1.67      | 5     | 20    | 26     | 62  | 34.2 | 34  | 180 | 110 | 115 | 18    | 40.5  |
|          |           |       |       |        |     |      |     |     |     |     |       |       |
|          |           |       |       |        |     |      |     |     |     |     |       |       |
|          |           |       |       |        |     |      |     |     |     |     |       |       |

## CLEVIS SHORTENING HOOK 羊角翅钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflix crack detection ◇ 100% 进行磁粉探伤



### SLR338-CLEVIS SHORTENING HOOK

羊角翅钩

**SLR338**

| ITEM NO.       | WEIGHT (KG) | WLL (T) | B.L (T) | A      | B      | E      | M       | L       | L'      |
|----------------|-------------|---------|---------|--------|--------|--------|---------|---------|---------|
| 8-SLR338-06    | 0.18        | 1.12    | 4.48    | 7.5±1  | 32.5±2 | 8±1    | 45.5±2  | 78±3    | 46±2    |
| 8-SLR338-7/8   | 0.39        | 2       | 8       | 9.5±1  | 36±2   | 11±1   | 63±2    | 108±3   | 66.5±2  |
| 8-SLR338-10    | 0.95        | 3.15    | 12.6    | 12±1   | 46±2   | 13±1   | 79±3    | 127±3   | 74.5±3  |
| 8-SLR338-13    | 2           | 5.3     | 21.2    | 15±1   | 59±3   | 15.5±1 | 100±3   | 163±4   | 97.5±3  |
| 8-SLR338-16    | 3.5         | 8       | 32      | 19±2   | 70±3   | 20±2   | 123.5±4 | 203.5±5 | 125.5±4 |
| 8-SLR338-18/20 | 5.5         | 12.5    | 50      | 23±2   | 80±4   | 25±2   | 152±4   | 245±5   | 151±4   |
| 8-SLR338-22    | 7.8         | 15      | 60      | 25.5±2 | 98±4   | 26±2   | 171±5   | 279.6±5 | 171.5±5 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力


- Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)





## G80 EYE SHORTENING GRAB HOOK 80级 眼型抓钩

- ◆ Forged super alloy steel-Quenched and Tempered
  - ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
  - ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
  - ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 time working load limit for 20000 cycles
  - ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
  - ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
  - ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理) : ◇ Powder plastified (喷塑)
  - ◆ Colour code (色号) :
    - ◇ Red (红色) RAL3020
    - ◇ Yellow (黄色) RAL1003



### SLR331-EYE SHORTENING GRAB HOOK

SLR331

#### 眼型翅钩

| ITEM NO.        | WEIGHT (KG) | WLL (T) | B.L (T) | Ø±2  | E±2 | D±2 | B±3   | L±3  |
|-----------------|-------------|---------|---------|------|-----|-----|-------|------|
| 8-SLR-331-06    | 0.25        | 1.12    | 4.48    | 13   | 8   | 8   | 45    | 76.5 |
| 8-SLR-331-7/8   | 0.4         | 2       | 8       | 16   | 11  | 9.5 | 63    | 106  |
| 8-SLR-331-10    | 0.6         | 3.15    | 12.6    | 20   | 13  | 12  | 79    | 126  |
| 8-SLR-331-13    | 1.2         | 5.3     | 21.2    | 25   | 16  | 15  | 100   | 156  |
| 8-SLR-331-16    | 2.7         | 8       | 32      | 28.5 | 20  | 19  | 122   | 193  |
| 8-SLR-331-18/20 | 4.3         | 12.5    | 50      | 36   | 25  | 20  | 150.5 | 226  |
| 8-SLR-331-22    | 6.4         | 15      | 60      | 42   | 26  | 27  | 169   | 269  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)


#### Regular mark 常规标记:

| MARK 标记        | 10        | -8             | WLL 3.15T               | SLR                | CE                     | 18-1              |
|----------------|-----------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | SIZE 链条尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标记 | BATCH NUMBER 生产批号 |



## G80 CONTAINER HOOK 80级集装箱吊钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



### SLR472-G80 CONTAINER HOOK 80级集装箱吊钩


**SLR472**

| ITEM NO. | WEIGHT (kg) | WLL (T) | B.L (T) | A  | B    | C    | D  | E   | F   |
|----------|-------------|---------|---------|----|------|------|----|-----|-----|
| 6-8      | 1.5         | 5       | 20      | 16 | 54.5 | 58.4 | 37 | 127 | 188 |
|          |             |         |         |    |      |      |    |     |     |
|          |             |         |         |    |      |      |    |     |     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): WLL5T CE SLR + BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



### SLR277-G80 CONTAINER HOOK 80级集装箱吊钩

**SLR277**

(Not for recommendation) 不做推荐

| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | A    | B  | C  | D   |
|--------------|-------------|---------|---------|------|----|----|-----|
| SLR-277-13mm | 1.41        | 5       | 20      | 17.6 | 47 | 53 | 180 |
|              |             |         |         |      |    |    |     |
|              |             |         |         |      |    |    |     |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): WLL5T CE SLR + BATCH NUMBER (批号)



## G80 CLEVIS GRAB HOOK 80级 羊角滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理) : Powder plastified (喷塑)
- ◆ Colour code (色号) : Red (红色) RAL3020
- Yellow (黄色) RAL1003.



### SLR237-G80 CLEVIS FOUNDRY HOOK 80级羊角大开口钩


**SLR237**

| ITEM NO.          | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±0.5 | B±1.2 | M±2 | E±1  | C±1 | N±0.5 | H±2  | L±2 |
|-------------------|----------------|------------|------------|-------|-------|-----|------|-----|-------|------|-----|
| <b>SLR237-7/8</b> | 1.1            | 2          | 8          | 9.5   | 37    | 128 | 63.4 | 18  | 18    | 31.5 | 161 |
| <b>SLR237-10</b>  | 2.5            | 3.15       | 12.6       | 13    | 49    | 156 | 76.9 | 23  | 32    | 38   | 199 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



### SLR024-G80 CLEVIS C HOOK 80级异型C型羊角钩

**SLR024**

| ITEM NO.         | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±0.5 | B±1.5 | E±1  | H±1  | K±2   | L±2.5 |
|------------------|----------------|------------|------------|-------|-------|------|------|-------|-------|
| <b>SLR24-7/8</b> | 0.57           | 2          | 8          | 9.5   | 35    | 20   | 28   | 90    | 136   |
| <b>SLR24-10</b>  | 1.4            | 3.15       | 12.6       | 13    | 46    | 29.5 | 39.5 | 127   | 189   |
| <b>SLR24-13</b>  | 3              | 5.3        | 21.2       | 16.5  | 59    | 39.5 | 52   | 166.5 | 246   |
| <b>SLR24-16</b>  | 5.42           | 8          | 32         | 18.5  | 72    | 46.5 | 59   | 206   | 298   |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 7/8-8 CE SLR + BATCH NUMBER (批号)



## G80 CLEVIS C HOOK 80级 C型羊角钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN18-2 G80 chain
- ◇ 与EN18-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理) : Powder plastified (喷塑)
- ◆ Colour code (色号) : Red (红色) RAL3020  
Yellow (黄色) RAL1003



### SLR102-G80 CLEVIS C HOOK

#### 80级C型羊角钩

**SLR102**


**Not for lifting only for logging 不能用于起重, 仅用于森林采伐业**

| ITEM NO.   | WEIGHT (kg) | WLL (T) | B.L (T) | B±1.2 | A±0.5 | E±0.5 | H±1 | M±2  | N±0.5 | L±2  |
|------------|-------------|---------|---------|-------|-------|-------|-----|------|-------|------|
| SLR102-6   | 0.413       | 1.12    | 4.48    | 31    | 8     | 8.5   | 18  | 66.5 | 25    | 83   |
| SLR102-7/8 | 0.413       | 2       | 8       | 35    | 9.5   | 9.8   | 18  | 72.7 | 22.2  | 95.5 |
| SLR102-10  | 0.92        | 3.15    | 12.6    | 44    | 13    | 13    | 22  | 98.3 | 33.2  | 137  |
| SLR102-13  | 1.75        | 5.3     | 21.2    | 53    | 16    | 16    | 30  | 119  | 40    | 165  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 7/8-B CE SLR +BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◇ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



### SLR230-CLEVIS C HOOK

#### 羊角C型钩


**SLR230**

| ITEM NO.        | WEIGHT (KG) | LC/KN | MBL/KN | A±1  | B±0.5 | C±0.5 | E±0.3 | H±0.3 | G±0.3 | L±1 |
|-----------------|-------------|-------|--------|------|-------|-------|-------|-------|-------|-----|
| 8-SLR-230-7-10  | 0.42        | 45    | 90     | 35   | 8.5   | 25    | 11.5  | 19.5  | 24    | 99  |
| 8-SLR-230-8-10  | 0.43        | 50    | 100    | 33.5 | 10    | 25.4  | 10.5  | 19    | 23.6  | 98  |
| 8-SLR-230-10-10 | 0.84        | 85    | 170    | 41   | 12    | 29    | 13    | 22    | 33    | 133 |



## G80 CLEVIS C HOOK 80级 C型羊角钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤




### SLR913-CLEVIS C HOOK

#### 羊角 C 型钩

**SLR913**

| TIEM CODE    | WEIGHT (Kg) | WLL (KN) | BF (KN) | A±0.5 | B±1  | C±1  | D±1  | E±1  | L±2  |
|--------------|-------------|----------|---------|-------|------|------|------|------|------|
| 8-SLR913-7/8 | 0.45        | 45       | 90      | 9.5   | 35.5 | 24.5 | 13.5 | 10.5 | 99.5 |
|              |             |          |         |       |      |      |      |      |      |
|              |             |          |         |       |      |      |      |      |      |
|              |             |          |         |       |      |      |      |      |      |

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



### SLR881-C TYPE CLEVIS FOREST HOOK

#### C 型羊角钩

**SLR881**


| ITEM NO.<br>货号 | WEIGHT<br>(kg)<br>单重 | LC<br>(KN) | B.L<br>(KN) | A±1 | B±1.5 | C±1 | D±1 | E±1.5 | H±0.5 | Ø±0.5 | L±2   |
|----------------|----------------------|------------|-------------|-----|-------|-----|-----|-------|-------|-------|-------|
| 10-SLR881-8    | 0.47                 | 60         | 120         | 9.5 | 33.5  | 26  | 20  | 10.5  | 23.5  | 10.2  | 100.5 |
|                |                      |            |             |     |       |     |     |       |       |       |       |
|                |                      |            |             |     |       |     |     |       |       |       |       |
|                |                      |            |             |     |       |     |     |       |       |       |       |



## CLEVIS SLING HOOK

### 羊角滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnetflux crack detection
- ◇ 100% 进行磁粉探伤



#### SLR673-NEW TYPE CLEVIS SLIP HOOK WITH LATCH

**SLR673**


##### 新型带舌片羊角滑钩

| ITEM NO.     | WEIGHT<br>(KG) | WLL/lbs | B.L/lbs | A±1 | B±0.5 | h±1  | L±1.5 | E±1 | M±0.5 | Ø±0.5 |
|--------------|----------------|---------|---------|-----|-------|------|-------|-----|-------|-------|
| 8-SLR673-1/4 | 0.27           | 2750    | 11000   | 28  | 11    | 19.3 | 100   | 20  | 15    | 9.8   |
|              |                |         |         |     |       |      |       |     |       |       |
|              |                |         |         |     |       |      |       |     |       |       |
|              |                |         |         |     |       |      |       |     |       |       |
|              |                |         |         |     |       |      |       |     |       |       |

## CLEVIS LARGE OPENING HOOK

### 羊角大开口钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnetflux crack detection
- ◇ 100% 进行磁粉探伤



#### SLR507- G80 CLEVIS LARGE OPENING HOOK

**SLR507**

##### 80级羊角大开口钩

| ITEM NO.    | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A±1  | B±1  | E±1.5 | M±1.5 | L±3 |
|-------------|----------------|------------|------------|------|------|-------|-------|-----|
| 8-SLR507-13 | 2              | 5.3        | 21.2       | 15.5 | 49.5 | 74    | 154   | 213 |
|             |                |            |            |      |      |       |       |     |
|             |                |            |            |      |      |       |       |     |
|             |                |            |            |      |      |       |       |     |
|             |                |            |            |      |      |       |       |     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)




## G80 EYE SLING HOOK 80级 眼型滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ With cast latch
- ◇ 每件产品均配有铸造保险舌片
- ◆ Surface finish(表面处理) : Powder plastified (喷漆)
- ◆ Colour code(色号) : Red(红色) RAL3020 / Yellow(黄色) RAL1003



### SLR013-G80 EYE SLING HOOK WITH LATCH 80级眼型滑钩

**SLR013**



| ITEM NO.     | WEIGHT (KG) | WLL (T) | B.L (T) | B ±1.5 | E ±2 | D ±2 | A ±3 | L ±2 |
|--------------|-------------|---------|---------|--------|------|------|------|------|
| 8-SLR-13-06  | 0.3         | 1.12    | 4.48    | 9      | 21.5 | 20   | 20   | 108  |
| 8-SLR-13-7/8 | 0.4         | 2       | 8       | 11     | 27.5 | 24   | 25   | 133  |
| 8-SLR-13-10  | 0.9         | 3.15    | 12.6    | 15     | 27.2 | 38   | 38   | 167  |
| 8-SLR-13-13  | 2.2         | 5.3     | 21.2    | 19     | 38.5 | 51   | 43   | 213  |
| 8-SLR-13-16  | 3.2         | 8       | 32      | 23     | 42   | 62   | 50   | 255  |
| 8-SLR-13-20  | 5.8         | 12.5    | 50      | 24     | 44.6 | 74.8 | 63   | 305  |
| 8-SLR-13-22  | 9.2         | 15      | 60      | 32     | 70   | 68   | 62   | 348  |
| 8-SLR-13-26  | 13          | 21.2    | 84.8    | 35     | 84   | 84   | 64   | 394  |
| 8-SLR-13-32  | 18.5        | 31.5    | 126     | 37     | 102  | 100  | 88   | 480  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark(常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

### SP-SLR013 - CAST LATCH KITS

#### SLR013的铸造舌片配件

| ITEM CODE<br>货号 | SIZE<br>规格 | ITEM CODE<br>货号 | SIZE<br>规格 |
|-----------------|------------|-----------------|------------|
| SP-SLR013-6     | 6-8        | SP-SLR013-20    | 20-8       |
| SP-SLR013-7/8   | 7/8-8      | SP-SLR013-22    | 22-8       |
| SP-SLR013-10    | 10-8       | SP-SLR013-26    | 26-8       |
| SP-SLR013-13    | 13-8       | SP-SLR013-32    | 32-8       |
| SP-SLR013-16    | 16-8       |                 |            |

1 SET = CAST LATCH + SCREW + NUT + SPRING ( GALVANIZED)

1套= 铸造舌片+螺丝+螺母+弹簧 ( 电镀锌 )

#### Regular mark 常规标记:

| MARK 标记           | 10           | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | SIZE<br>铭牌尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G80 EYE SLING HOOK 80级 眼型滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ With cast latch
- ◇ 每件产品均配有铸造保险舌片
- ◆ Surface finish(表面处理) : Powder plastified (喷塑)
- ◆ Colour code(色号) :Red(红色) RAL3020 / Yellow(黄色) RAL1003



### SLR334 - EYE SLING HOOK WITH LATCH

#### 眼型滑钩

SLR334



| ITEM NO.      | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | M±2  | A±2  | E±2  | H±3 | B±3   | L±3   | D±3 |
|---------------|----------------|------------|------------|------|------|------|-----|-------|-------|-----|
| 8-SLR-334-06  | 0.3            | 1.12       | 4.48       | 20.5 | 9    | 18.5 | 20  | 68    | 109   | 17  |
| 8-SLR-334-7/8 | 0.55           | 2          | 8          | 25   | 11   | 22   | 27  | 84    | 133.5 | 24  |
| 8-SLR-334-10  | 1.05           | 3.15       | 12.6       | 34   | 14   | 28   | 33  | 102.5 | 167.5 | 29  |
| 8-SLR-334-13  | 1.75           | 5.3        | 21.2       | 42.5 | 17.5 | 35   | 40  | 128.5 | 207.5 | 36  |
| 8-SLR-334-16  | 3.2            | 8          | 32         | 52   | 22   | 43   | 48  | 156.5 | 253   | 50  |
| 8-SLR-334-20  | 5.3            | 12.5       | 50         | 62   | 26   | 51.5 | 56  | 187   | 300   | 60  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark(常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

### SP-SLR334&SLR333 -CAST LATCH KITS

#### SLR333和SLR334的铸造舌片配件



| ITEM CODE<br>货号 | SIZE<br>规格 | ITEM CODE<br>货号 | SIZE<br>规格 |
|-----------------|------------|-----------------|------------|
| SP-SLR334-6     | 6-8        | SP-SLR334-20    | 20-8       |
| SP-SLR334-7/8   | 7/8-8      |                 |            |
| SP-SLR334-10    | 10-8       |                 |            |
| SP-SLR334-13    | 13-8       |                 |            |
| SP-SLR334-16    | 16-8       |                 |            |

1 SET = CAST LATCH + SCREW + NUT + SPRING ( GALVANIZED)

1套= 铸造舌片+螺丝+螺母+弹簧 (电镀锌)

#### Regular mark 常规标记:

| MARK 标记           | 10           | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | SIZE<br>链条尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |






## G80 EYE SLING HOOK WITH LATCH 80级 眼型货钩

- ◆ Forged super alloy steel- Quenched and Tempered.
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理。
- ◆ Suitable for EN818-2 G80 chain.
- ◇ 与EN818-2标准80级链条配合使用。
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◇ 逐件按工作拉力的2.5倍进行验证测试。
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试。
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection.
- ◇ 100% 进行磁粉探伤
- ◆ With latch. 每件产品均配有保险舌片。
- ◆ Surface finish(表面处理) : Powder plastified (喷塑)
- ◆ Colour code(色号) : Red(红色) RAL3020 / Yellow(黄色) RAL1003.



### SLR039-G80 EYE SLING HOOK WITH LATCH 80级眼型货钩

SLR039



| ITEM NO.       | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | D±1 | E±1.5 | H±1  | K±2   | L±1   |
|----------------|----------------|------------|------------|-----|-------|------|-------|-------|
| 8-SLR039-6     | 0.27           | 1.12       | 4.48       | 19  | 22    | 20.5 | 82    | 112   |
| 8-SLR039-7/8   | 0.6            | 2          | 8          | 28  | 25    | 26   | 104.5 | 142   |
| 8-SLR039-10    | 0.84           | 3.15       | 12.6       | 31  | 27    | 28   | 120   | 163   |
| 8-SLR039-13    | 1.81           | 5.3        | 21.2       | 39  | 35.5  | 40   | 146   | 203   |
| 8-SLR039-16    | 3.35           | 8          | 32         | 51  | 44    | 45   | 187.5 | 255   |
| 8-SLR039-18/20 | 6.1            | 12.5       | 50         | 62  | 55    | 57   | 231.5 | 317   |
| 8-SLR039-22    | 9.6            | 15         | 60         | 73  | 57    | 66   | 262   | 360   |
| 8-SLR039-26    | 16             | 21.2       | 84.8       | 89  | 83    | 79.6 | 318   | 433   |
| 8-SLR039-32    | 25.8           | 31.5       | 126        | 90  | 95    | 91   | 360   | 495.5 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark(常规标记) : 10-8 WLL 3.15T CE SLR + BATCH NUMBER(批号)

### SP-SLR039 & SLR040 - LATCH KIT

SLR039和SLR040的舌片配件 (舌片+弹簧+螺丝+螺母)



| ITEM CODE<br>货号 | SIZE<br>规格 | ITEM CODE<br>货号 | SIZE<br>规格 |
|-----------------|------------|-----------------|------------|
| SP-SLR039-6     | 6-8        | SP-SLR039-20    | 20-8       |
| SP-SLR039-7/8   | 7/8-8      | SP-SLR039-22    | 22-8       |
| SP-SLR039-10    | 10-8       | SP-SLR039-26    | 26-8       |
| SP-SLR039-13    | 13-8       | SP-SLR039-32    | 32-8       |
| SP-SLR039-16    | 16-8       |                 |            |

### Regular mark 常规标记:


| MARK 标记           | 10           | -8                | WLL 3.15T                  | SLR                   | CE                        | 18-1                 |
|-------------------|--------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | SIZE<br>铭表尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## EYE SLING HOOK

### 眼型滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- Yellow (黄色) RAL1003



#### SLR847-EYE SLING HOOK WITH LATCH


**SLR847**

眼型滑钩

| TIEM CODE      | WEIGHT<br>(kg) | WLL<br>(T) | BF<br>(T) | A±1  | E±1.5 | M±2   | N±1  | H±1  | L±3 | Φ±2 |
|----------------|----------------|------------|-----------|------|-------|-------|------|------|-----|-----|
| 8-SLR847-6     | 0.27           | 1.12       | 4.48      | 9.5  | 22    | 70    | 17   | 19   | 110 | 21  |
| 8-SLR847-7/8   | 0.655          | 2          | 8         | 16   | 27    | 86    | 24   | 23.3 | 144 | 26  |
| 8-SLR847-10    | 1.22           | 3.15       | 12.6      | 19   | 33    | 103   | 24   | 28   | 190 | 34  |
| 8-SLR847-13    | 2.43           | 5.3        | 21.2      | 23   | 40    | 135.7 | 38   | 37   | 227 | 42  |
| 8-SLR847-16    | 3.81           | 8          | 32        | 28.5 | 44    | 161   | 41.5 | 41   | 257 | 52  |
| 8-SLR847-18/20 | 5.9            | 12.5       | 50        | 27   | 53    | 187   | 46   | 50   | 301 | 60  |
| 8-SLR847-22    | 9.1            | 15         | 70        | 32   | 72    | 240   | 57   | 59.5 | 337 | 52  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- Yellow (黄色) RAL1003



#### SLR864-EYE SLING HOOK WITH CAST LATCH

**SLR864**

眼型滑钩 带铸舌

| ITEM NO. | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±1  | E±1.5 | M±2   | N±1  | L±3 | Φ±2 | Φ±2 |
|----------|----------------|------------|------------|------|-------|-------|------|-----|-----|-----|
| 6-8      | 0.3            | 1.12       | 4.48       | 10   | 18    | 67    | 8.5  | 120 | 18  | 20  |
| 7/8-8    | 0.59           | 2          | 8          | 11   | 25    | 91    | 9.2  | 153 | 26  | 25  |
| 10-8     | 1.23           | 3.15       | 12.6       | 16   | 30    | 112   | 13   | 188 | 30  | 34  |
| 13-8     | 2.29           | 5.3        | 21.2       | 19.5 | 39    | 131   | 16.5 | 233 | 37  | 43  |
| 16-8     | 4.7            | 8          | 32         | 24.5 | 48    | 169.5 | 20.6 | 294 | 48  | 50  |



## G80 EYE FOUNDRY HOOK 80级 眼型大开口钩


- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理) : Powder plastified (喷塑)
- ◆ Colour code (色号) : Red (红色) RAL3020  
Yellow (黄色) RAL1003



### SLR116-G80 EYE FOUNDRY HOOK G80眼型大开口钩

SLR116

RECOMMENDED 推荐产品 With flat on eye 环眼处有压扁



| ITEM NO.       | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | φ ± 1 | L ± 3 | B ± 2 | R ± 2 | E ± 1 | φ1 ± 1 | H ± 2 | M  |
|----------------|----------------|------------|------------|-------|-------|-------|-------|-------|--------|-------|----|
| 8-SLR116-1.12T | 0.382          | 1.12       | 4.48       | 20    | 133   | 100   | 102.7 | 49    | 10     | 17    | 19 |
| 8-SLR116-2.0T  | 0.69           | 2          | 8          | 24    | 158.5 | 130   | 120.5 | 62    | 12     | 19    | 26 |
| 8-SLR116-3.2T  | 1.3            | 3.2        | 12.8       | 31.5  | 199   | 152.5 | 153   | 73    | 15     | 25    | 31 |
| 8-SLR116-5.3T  | 2.32           | 5.3        | 21.2       | 44    | 241.5 | 186   | 184   | 90    | 19     | 33    | 39 |
| 8-SLR116-8T    | 4              | 8          | 32         | 49    | 279   | 218   | 216   | 105   | 22     | 37    | 42 |
| 8-SLR116-12.5T | 7.3            | 12.5       | 50         | 60    | 330   | 252   | 247   | 114   | 26     | 46    | 57 |
| 8-SLR116-15T   | 11.4           | 15         | 60         | 64    | 376   | 274   | 275   | 123   | 31     | 60    | 70 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)


### Regular mark 常规标记:

| MARK 标记        | 10      | -8             | WLL 3.15T               | SLR                | CE                     | 18-1              |
|----------------|---------|----------------|-------------------------|--------------------|------------------------|-------------------|
| DESCRIPTION 说明 | SIZE 尺寸 | GRADE 80 等级80级 | WORKING LOAD LIMIT 工作拉力 | MANUFACTURER 生产商标记 | CE CERTIFICATE CE 认证标志 | BATCH NUMBER 生产批号 |



## ALLOY EYE HOOK 异型眼型抓钩

- ◆ Large throat opening and small cross area
- ◇ 大开口，小截面，更方便连接和穿入。
- ◆ Forged alloy steel, High strength and good ductility
- ◇ 优质合金钢锻造而成，高强度，韧性好。
- ◆ Only for general hoist, Not for overhead lifting
- ◇ 仅用于一般起吊，不能用于头上起重作业。



SLR220-ALLOY EYE HOOK

SLR220

异型眼型抓钩

| ITEM NO.       | WEIGHT (KG) | WLL (T) | B.L (T) | Ø ±2 | B ±2 | E ±2 | H ±3 | L ±3  | P ±3 |
|----------------|-------------|---------|---------|------|------|------|------|-------|------|
| 8-SLR-220-3.2T | 0.84        | 3.2     | 12.8    | 31   | 36   | 60   | 28.3 | 173.5 | 23   |
| 8-SLR-220-3.8T | 1.17        | 3.8     | 15.2    | 31   | 36   | 78   | 32.5 | 199   | 25   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : WLL3.2T CE SLR

## 3040 EYE HOIST HOOK 3040系列眼型吊钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnatflux crack detection
- ◇ 100% 进行磁粉探伤



SLR368-3040 EYE HOIST HOOK

SLR368

3040系列眼型吊钩

WITH LARGE OPENING 大开口

| TIEM CODE    | WEIGHT (kg) | WLL (T) | BF (T) | N ±1 | D ±1 | E ±1 | M ±2  | H ±1 | L ±2  |
|--------------|-------------|---------|--------|------|------|------|-------|------|-------|
| 8-SLR368-081 | 0.78        | 2       | 8      | 18   | 16   | 41   | 104.5 | 32.5 | 154   |
| 8-SLR368-501 | 1.32        | 3.15    | 12.6   | 19   | 17   | 34.5 | 115.5 | 37.5 | 179   |
| 8-SLR368-721 | 2.56        | 5.3     | 21.2   | 25.5 | 23   | 50   | 152   | 47   | 227.5 |

Ultimate load is 4 times the Working Load Limit. 破断拉力为工作拉力的4倍。

- Regular mark (常规标记以8-SLR368-081为例) : WLL2T CE SLR+BATCH NUMBER(批号)




## G80 EYE FOUNDRY HOOK 80级 小眼滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020  
Yellow (黄色) RAL1003



### SLR015-G80 EYE FOUNDRY TYPE G80 小眼滑钩

SLR015



| ITEM NO.    | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | E±1.2 | A±1   | D±1  | H±1  | M±1  | N±0.5 | K±2 | L±2 |
|-------------|----------------|------------|------------|-------|-------|------|------|------|-------|-----|-----|
| 8-SLR015-6  | 1.09           | 1.6        | 6.4        | 63.5  | 39    | 18   | 31   | 25.4 | 18    | 120 | 163 |
| 8-SLR015-8  | 1.09           | 2          | 8          | 63.5  | 39    | 18   | 31   | 25.4 | 18    | 120 | 163 |
| 8-SLR015-10 | 2.03           | 3.2        | 12.8       | 76    | 50.8  | 22   | 38   | 32.6 | 23    | 146 | 200 |
| 8-SLR015-13 | 3.22           | 5.4        | 21.6       | 89    | 63.5  | 27   | 44.5 | 38.1 | 27    | 171 | 238 |
| 8-SLR015-16 | 5.26           | 8.2        | 32.8       | 102   | 76    | 32   | 52   | 46   | 32    | 198 | 278 |
| 8-SLR015-20 | 9.1            | 12.8       | 51.2       | 114.5 | 89    | 38   | 65   | 55.9 | 39    | 232 | 325 |
| 8-SLR015-22 | 11.3           | 15.5       | 62         | 127.5 | 102   | 45   | 69   | 57   | 40    | 256 | 361 |
| 8-SLR015-26 | 16.8           | 21.6       | 86.4       | 140   | 126   | 66.5 | 77   | 66   | 45    | 283 | 402 |
| 8-SLR015-32 | 26.6           | 32.8       | 131.2      | 153.5 | 151.5 | 81.5 | 97.5 | 80   | 56    | 327 | 461 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍


### Regular mark 常规标记:

| MARK 标记           | 10           | -8                | WLL 3.2T                   | SLR                   | CE                        | 18-1                 |
|-------------------|--------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | SIZE<br>铭标尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## G80 EYE SLING HOOK 80级 眼型滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnetflux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- ◆ Yellow (黄色) RAL1003



### SLR056-G80 EYE SLING HOOK 80级 眼型滑钩


**SLR056**

| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | Φ±1  | D±1  | E±1.5 | F±1 | H±1  | L±2 | M±2 |
|--------------|-------------|---------|---------|------|------|-------|-----|------|-----|-----|
| 8-SLR056-7/8 | 0.4         | 2       | 8       | 17.5 | 11   | 31    | 23  | 25.5 | 118 | 80  |
| 8-SLR056-10  | 0.7         | 3.2     | 12.8    | 21.5 | 12.5 | 37.5  | 28  | 30.5 | 142 | 106 |
| 8-SLR056-13  | 1.32        | 5.4     | 21.6    | 27   | 17   | 45    | 35  | 37.5 | 172 | 127 |
| 8-SLR056-16  | 2.11        | 8.2     | 32.8    | 30   | 20   | 52.5  | 40  | 43.5 | 200 | 153 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 7/8-8 WLL2T CE SLR + BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnetflux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- ◆ Yellow (黄色) RAL1003



### SLR218-EYE SLING HOOK 眼型滑钩

**SLR218**

| ITEM NO. | WEIGHT (kg) | WLL (T) | B.L (T) | Φ1±1 | Φ2±1.5 | D±1  | E±1.5 | F±1 | H±1  | K±2 | L±2   |
|----------|-------------|---------|---------|------|--------|------|-------|-----|------|-----|-------|
| SLR-218  | 0.424       | 1       | 4       | 23.5 | 31     | 11.5 | 26.5  | 17  | 19.5 | 92  | 123.5 |
|          |             |         |         |      |        |      |       |     |      |     |       |
|          |             |         |         |      |        |      |       |     |      |     |       |
|          |             |         |         |      |        |      |       |     |      |     |       |
|          |             |         |         |      |        |      |       |     |      |     |       |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): WLL1T CE SLR + BATCH NUMBER (批号)



## EYE SLING HOOK

### 眼型滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- Yellow (黄色) RAL1003



#### SLR175-G80 EYE SLING HOOK 80级 眼型吊钩


SLR175

| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | Φ1±1 | Φ2±1 | D±1  | E±1.5 | F±1  | H±1  | K±1  | L±2   |
|--------------|-------------|---------|---------|------|------|------|-------|------|------|------|-------|
| 8-SLR175-6   | 0.4         | 1.12    | 4.48    | 22   | 22   | 10   | 23    | 17   | 22   | 46   | 124   |
| 8-SLR175-7/8 | 0.56        | 2       | 8       | 26   | 24   | 11.5 | 26    | 18.5 | 24.5 | 47   | 143.5 |
| 8-SLR175-10  | 0.99        | 3.15    | 12.6    | 32.5 | 33   | 13.5 | 34    | 25   | 33   | 60.5 | 117.5 |
| 8-SLR175-13  | 2.35        | 5.3     | 21.2    | 39.5 | 40   | 18   | 41    | 33   | 41.5 | 76   | 225.5 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR +BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- Yellow (黄色) RAL1003



#### SLR219-EYE SLING HOOK 眼型滑钩

SLR219

| ITEM NO. | WEIGHT (kg) | WLL (T) | B.L (T) | Φ1±1 | Φ2±1.5 | D±1 | E±1.5 | F±1 | H±1 | K±1.5 | L±2 |
|----------|-------------|---------|---------|------|--------|-----|-------|-----|-----|-------|-----|
| SLR219-6 | 0.315       | 1.12    | 4.48    | 19.5 | 18     | 10  | 21    | 16  | 20  | 87    | 117 |
|          |             |         |         |      |        |     |       |     |     |       |     |
|          |             |         |         |      |        |     |       |     |     |       |     |
|          |             |         |         |      |        |     |       |     |     |       |     |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 6-8



## G80 EYE SLING HOOK 80级 眼型滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- ◆ Yellow (黄色) RAL1003



- ◆ Positive lock latch is selflocking when hook is loaded.
- ◇ 在负荷下, 钩子的自锁结构会自动闭合, 更安全

### SLR302-G80 EYE SLING HOOK 80级 眼型滑钩


**SLR302**

| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | Φ1±1 | Φ2±1 | D±1 | E±1.5 | F±1  | H±1  | L±2   |
|--------------|-------------|---------|---------|------|------|-----|-------|------|------|-------|
| 8-SLR302-6   | 0.35        | 1.12    | 4.48    | 20   | 21   | 9   | 25    | 14.5 | 23.2 | 121.5 |
| 8-SLR302-7/8 | 0.61        | 2       | 8       | 25   | 23   | 11  | 24    | 19   | 32   | 147.5 |
| 8-SLR302-10  | 1.08        | 3.15    | 12.6    | 38   | 29   | 15  | 32    | 23.5 | 35   | 184   |
| 8-SLR302-13  | 2           | 5.3     | 21.2    | 43   | 36   | 19  | 38    | 27.5 | 42.5 | 225   |
| 8-SLR302-16  | 3.75        | 8       | 32      | 50   | 45   | 23  | 48    | 35.5 | 54   | 265   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR +BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection 100% 进行磁粉探伤



### SLR315-G80 EYE SLING HOOK 80级 眼型滑钩

**SLR315**

| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | A±1  | B±1  | E±1.5 | F±1  | H±1  | L±2   | Φ±1 |
|--------------|-------------|---------|---------|------|------|-------|------|------|-------|-----|
| 8-SLR315-6   | 0.31        | 1.12    | 4.48    | 20.5 | 21   | 23    | 15   | 18   | 114.5 | 18  |
| 8-SLR315-7/8 | 0.56        | 2       | 8       | 25.5 | 26   | 29.7  | 19.5 | 23.5 | 138.5 | 23  |
| 8-SLR315-10  | 0.99        | 3.15    | 12.6    | 35   | 37.5 | 34    | 23   | 27.7 | 163.7 | 38  |
| 8-SLR315-13  | 1.85        | 5.3     | 21.2    | 40.5 | 41.5 | 43    | 32   | 35.5 | 210   | 45  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR +BATCH NUMBER (批号)






## G80 EYE SLING HOOK 80级 眼型滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理) : Powder plastified ( 喷塑 )
- ◆ Colour code(色号) : Red ( 红色 ) RAL3020
- Yellow ( 黄色 ) RAL1003



### SLR332-G80 EYE SLING HOOK 80级 眼型滑钩

SLR332



| ITEM NO.       | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | Φ1±1 | Φ2±1 | D±1  | E±1.5 | F±1  | H±1  | L±3   |
|----------------|----------------|------------|------------|------|------|------|-------|------|------|-------|
| 8-SLR332-6     | 0.39           | 1.12       | 4.48       | 20   | 23   | 9    | 22    | 18   | 20.5 | 122   |
| 8-SLR332-7/8   | 0.5            | 2          | 8          | 25.5 | 24   | 11.5 | 26    | 18   | 23.5 | 138.5 |
| 8-SLR332-10    | 0.93           | 3.15       | 12.6       | 32.5 | 36   | 13.5 | 34    | 20   | 30   | 176.5 |
| 8-SLR332-13    | 1.98           | 5.3        | 21.2       | 39.5 | 48   | 18   | 41    | 29.5 | 37   | 218   |
| 8-SLR332-16    | 3.46           | 8          | 32         | 50   | 56   | 23   | 44    | 34   | 42.5 | 260   |
| 8-SLR332-18/20 | 6.06           | 12.5       | 50         | 60   | 61   | 26.5 | 52    | 49.5 | 54.5 | 310   |
| 8-SLR332-22    | 10.28          | 15         | 60         | 68   | 80   | 31.5 | 60    | 44   | 76   | 375.5 |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark ( 常规标记 ) : 10-8 WLL3.15T CE SLR +BATCH NUMBER ( 批号 )



## G80 EYE SLING HOOK 80级 眼型滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- ◆ Yellow (黄色) RAL1003



### SLR380-G80 EYE SLING HOOK 80级 眼型滑钩


**SLR380**

| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | Φ1±1 | Φ2±1 | D±1  | E±1.5 | F±1  | H±1  | L±2   | M±2   |
|--------------|-------------|---------|---------|------|------|------|-------|------|------|-------|-------|
| 8-SLR380-6/7 | 0.45        | 1.5     | 6       | 25.4 | 23   | 10.2 | 27    | 19.3 | 24.4 | 139   | 87    |
| 8-SLR380-8   | 0.63        | 2       | 8       | 28.3 | 25   | 12   | 30.5  | 21   | 26   | 155.5 | 98    |
| 8-SLR380-10  | 1.38        | 3.15    | 12.6    | 36   | 30   | 16   | 40    | 27   | 34   | 195   | 124   |
| 8-SLR380-13  | 2.65        | 5.4     | 21.6    | 44.5 | 40   | 18   | 44    | 34   | 42   | 246   | 148.5 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 8-8 WLL2T CE SLR+BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- ◆ Yellow (黄色) RAL1003



### SLR631-EYE SLING HOOK 眼型滑钩

**SLR631**


| ITEM NO.  | WEIGHT (kg) | WLL (T) | B.L (T) | A±1 | B±1  | E±1.5 | L±2 | Φ±1 |
|-----------|-------------|---------|---------|-----|------|-------|-----|-----|
| SLR631-6T | 2.56        | 6       | 24      | 46  | 38.5 | 56.5  | 227 | 40  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): WLL6T CE SLR+BATCH NUMBER (批号)



## FORGED EYE HOOK 锻造眼钩



- ◆ Forged super alloy steel- Quenched and Tempered. 合金钢锻造，经过热处理。
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection. 100% 进行磁粉探伤 With cast latch 配备铸造舌片
- ◆ Grade 50 等级为50级。Surface finish(表面处理) : Powder plastified (喷塑)

### SLR327 - DIN7541 EYE HOOK

50级德标7541眼型吊钩

SLR327

| ITEM NO.     | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A ±1 | B ±2 | C ±0.5 | D ±1 | E ±2 |
|--------------|----------------|------------|------------|------|------|--------|------|------|
| 8-SLR327-H17 | 0.16           | 0.5        | 2          | 18   | 18   | 9      | 18   | 98   |
| 8-SLR327-H20 | 0.5            | 1          | 4          | 25   | 26   | 12.5   | 26   | 137  |
| 8-SLR327-H21 | 0.8            | 1.25       | 5          | 28.5 | 29   | 14     | 28.5 | 156  |
| 8-SLR327-H22 | 1.1            | 1.6        | 6.4        | 31.5 | 33   | 16.5   | 32   | 174  |
| 8-SLR327-H23 | 1.6            | 2          | 8          | 35   | 35   | 18     | 37   | 193  |
| 8-SLR327-H24 | 2              | 2.5        | 10         | 41   | 40   | 20     | 40   | 219  |
| 8-SLR327-H25 | 3.3            | 3          | 12         | 45.5 | 44   | 23     | 47.5 | 250  |
| 8-SLR327-H26 | 3.9            | 4          | 16         | 50   | 53.5 | 26     | 49.4 | 275  |

Regular mark(常规标记) : WLL 2T CE

### ● Regular mark 常规标记:


| MARK 标记           | 76         | -8                | WLL 0.5T                   | SLR                   | CE                        | 18-1                 |
|-------------------|------------|-------------------|----------------------------|-----------------------|---------------------------|----------------------|
| DESCRIPTION<br>说明 | SIZE<br>尺寸 | GRADE 80<br>等级80级 | WORKING LOAD LIMIT<br>工作拉力 | MANUFACTURER<br>生产商标记 | CE CERTIFICATE<br>CE 认证标记 | BATCH NUMBER<br>生产批号 |



## FISHING AND OVERSEAS RIGGING

### 渔业索具

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◆ 100% 进行磁粉探伤



#### SLR023- ALLOY FORGED G HOOK

##### 合金钢锻造G型钩


**SLR023**

| ITEM NO.      | WEIGHT (kg) | WLL (T) | B.L (T) | Φ ±1 | B ±1.5 | C ±1 | E ±0.5 | L ±2  |
|---------------|-------------|---------|---------|------|--------|------|--------|-------|
| 8-SLR023-4.2T | 0.8         | 4.2     | 21      | 27.5 | 80     | 20   | 15.3   | 126.5 |
| 8-SLR023-6.4T | 2.6         | 6.4     | 32      | 31   | 105.5  | 33   | 20     | 179   |

Ultimate load is 5 times the Working Load Limit 破断拉力是工作拉力的5倍

Regular mark (常规标记) : SWL4.2T CE SLR +BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◆ 100% 进行磁粉探伤



#### SLR066- FISHING AND OVERSEAS RIGGING

##### G型板钩

**SLR066**

| ITEM NO.      | WEIGHT (kg) | WLL (T) | B.L (T) | A     | E       | F       | L      | Φ       |
|---------------|-------------|---------|---------|-------|---------|---------|--------|---------|
| 8-SLR066-1.0T | 0.3         | 1       | 5       | 12 ±1 | 11.5 ±1 | 27 ±1   | 91 ±2  | 17.5 ±1 |
| 8-SLR066-1.5T | 0.6         | 1.5     | 7.5     | 16 ±1 | 13 ±1   | 37 ±2   | 107 ±2 | 20 ±1   |
| 8-SLR066-3.2T | 0.9         | 3.2     | 16      | 20 ±2 | 15 ±1   | 40 ±2   | 121 ±3 | 26 ±2   |
| 8-SLR066-5.6T | 3.1         | 5.6     | 28      | 30 ±2 | 23.5 ±2 | 57.7 ±3 | 180 ±4 | 38 ±2   |


Ultimate load is 5 times the Working Load Limit 破断拉力是工作拉力的5倍

Regular mark (常规标记) : WLL3.2T CE



## FISHING AND OVERSEAS RIGGING 渔业索具

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflex crack detection
- ◇ 100% 进行磁粉探伤



### SLR087- ALLOY FORGED DV HOOK 合金钢锻造DV钩


**SLR087**

| ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | $\Phi \pm 1$ | $B \pm 1.5$ | $E \pm 0.1$ | $H \pm 1$ | $L \pm 2$ |
|---------------|----------------|------------|------------|--------------|-------------|-------------|-----------|-----------|
| 8-SLR087-1.5T | 0.5            | 1.5        | 7.5        | 28           | 61          | 3           | 35        | 102       |
| 8-SLR087-3.0T | 0.73           | 3          | 15         | 30           | 72          | 3           | 41        | 119       |
| 8-SLR087-5.0T | 1.2            | 5          | 25         | 35           | 84          | 3           | 42        | 137       |
| 8-SLR087-8.0T | 2.06           | 8          | 40         | 42           | 96          | 3           | 42        | 153       |

Ultimate load is 5 times the Working Load Limit 破断拉力是工作拉力的5倍

Regular mark (常规标记) : SWL8T CE SLR +BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflex crack detection
- ◇ 100% 进行磁粉探伤



### SLR216- FISHING AND OVERSEAS RIGGING 开口渔业钩

**SLR216**

| ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | $\Phi \pm 1$ | $B \pm 1.5$ | $E \pm 1$ | $H \pm 1$ | $L \pm 2$ |
|---------------|----------------|------------|------------|--------------|-------------|-----------|-----------|-----------|
| 8-SLR216-1.5T | 0.4            | 1.5        | 6          | 18.3         | 61          | 4.5       | 34        | 91.5      |
| 8-SLR216-2.6T | 0.8            | 2.6        | 10.4       | 21.3         | 78.5        | 4.5       | 42        | 116.5     |
| 8-SLR216-4T   | 1.35           | 4          | 16         | 25.5         | 94          | 4.5       | 56.8      | 144       |
| 8-SLR216-6T   | 2.115          | 6          | 24         | 30.3         | 111         | 5         | 64        | 164       |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍


Regular mark (常规标记) : WLL1.5T CE SLR +BATCH NUMBER (批号)



## FISHING AND OVERSEAS RIGGING

### 渔业索具

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◆ 100% 进行磁粉探伤



#### SLR262- ALLOY FORGED G HOOK

##### 合金钢锻造G型钩


**SLR262**

| ITEM CODE<br>货号 | WEIGHT<br>(KG)重量 | WLL/T | B.L/T | A ± 1 | B ± 1.5 | E ± 1 | T ± 0.5 | L ± 2 |
|-----------------|------------------|-------|-------|-------|---------|-------|---------|-------|
| 8-SLR262-3T     | 0.69             | 3     | 15    | 28.5  | 72.5    | 41.5  | 18      | 119   |
| 8-SLR262-5T     | 1.13             | 5     | 25    | 35    | 83.5    | 44    | 18      | 136.5 |
| 8-SLR262-8T     | 2.1              | 8     | 40    | 42    | 90.5    | 42    | 18      | 150   |
| 8-SLR262-10T    | 3.98             | 10    | 50    | 41    | 116     | 60    | 19.3    | 185   |
| 8-SLR262-15T    | 6.1              | 15    | 75    | 51    | 139     | 73    | 20      | 216   |
| 8-SLR262-20T    | 8.4              | 20    | 100   | 62    | 156     | 82    | 28      | 242   |

Ultimate load is 5 times the Working Load Limit 破断拉力是工作拉力的5倍

Regular mark (常规标记): **WLL&T CE**

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◆ 100% 进行磁粉探伤



#### SLR119-FORGED "OFG" HOOK

##### G型钩

**SLR119**


| ITEM NO.    | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A ± 0.5 | Ø ± 1 | D ± 1 | H ± 1 | R ± 1.5 | E ± 0.5 | L ± 2 |
|-------------|----------------|------------|------------|---------|-------|-------|-------|---------|---------|-------|
| 8-SLR119-10 | 0.51           | 3.15       | 12.6       | 20      | 32    | 14    | 22    | 76.5    | 12      | 113   |
| 8-SLR119-13 | 1.3            | 5.3        | 21.2       | 26      | 40    | 18    | 29    | 95.5    | 15      | 140.5 |
| 8-SLR119-16 | 1.9            | 8          | 32         | 32      | 50    | 22    | 35.5  | 117     | 18.4    | 176   |
| 8-SLR119-19 | 2.7            | 12.5       | 50         | 38      | 60    | 26    | 43    | 141     | 22.5    | 216.5 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Regular mark (常规标记): **10-8 WLL&T CE SLR +BATCH NUMBER (批号)**



- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤




### SLR822-NOSE TYPE ANTI-SLIP HOOK

#### G80 鼻型防滑钩

**SLR822**

| ITEM NO. | WEIGHT/kg | WLL/T | BL/T | A±1 | B±1 | C±1  | D±1 | Ø±1 | E±1 | L±2.5 |
|----------|-----------|-------|------|-----|-----|------|-----|-----|-----|-------|
| 3.15T    | 1.5       | 3.15  | 12.6 | 22  | 16  | 40.3 | 28  | 31  | 40  | 202   |
|          |           |       |      |     |     |      |     |     |     |       |
|          |           |       |      |     |     |      |     |     |     |       |
|          |           |       |      |     |     |      |     |     |     |       |

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



### SLR-831 G80 EYE SLING HOOK WITH LATCH

#### G80 眼型滑钩


**SLR831**

| ITEM NO.    | WEIGHT/kg | WLL/T | B.L/T | A±1 | Ø1±1 | E±1 | ØD±1 | Ø±1 | L1±2  | L±2 | H±1  |
|-------------|-----------|-------|-------|-----|------|-----|------|-----|-------|-----|------|
| 8-SLR831-16 | 3         | 8     | 32    | 98  | 23   | 55  | 70.4 | 50  | 185.7 | 255 | 46.3 |
|             |           |       |       |     |      |     |      |     |       |     |      |
|             |           |       |       |     |      |     |      |     |       |     |      |
|             |           |       |       |     |      |     |      |     |       |     |      |



## FORGED HOOK 锻造钩

- ◆ Forged alloy steel-Quenched and tempered
- ◇ 优质合金钢锻造。经过热处理
- ◆ Regular mark(常规标记) : WLL5.3T




### SLR228 HEAVY WINCH HOOK 重型拖拉钩

**SLR228**

| ITEM NO.<br>(货号) | WEIGHT<br>(kg)<br>单重 | WLL<br>(LBS) | B.L<br>(LBS) | Ø±1  | A±1  | B±1  | C±1  | D±1 | E±1   |
|------------------|----------------------|--------------|--------------|------|------|------|------|-----|-------|
| 1/2-5/8          | 1.58                 |              |              | 28   | 21   | 17.5 | 39.6 | 102 | 154.4 |
| 3/4-7/8          | 3.16                 | 13574        | 54296        | 31   | 30   | 23   | 49   | 136 | 186   |
| 1                | 4.2                  | 41737.5      | 166950       | 30   | 35.5 | 24   | 46.9 | 123 | 203   |
| 1-1-1/8          | 4.09                 | 41500        | 166000       | 35.5 | 33   | 24   | 60.3 | 140 | 207   |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflix crack detection
- ◇ 100% 进行磁粉探伤



### SLR103-ALLOY LASHING HOOK 合金钢捆绑钩

**SLR103**

| ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | Φ±1 | E±2 | R±2.5 | L±2.5 |
|---------------|----------------|------------|------------|-----|-----|-------|-------|
| 8-SLR103-1.0T | 1.23           | 1          | 4          | 28  | 58  | 123.6 | 177.2 |
|               |                |            |            |     |     |       |       |
|               |                |            |            |     |     |       |       |
|               |                |            |            |     |     |       |       |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍


- Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)





## G80 SWIVEL HOOKS 80级 旋转钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



### SLR788-SWIVLE HOOK WITH LATCH

带轴承旋转钩


SLR788

| ITEM NO.        | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A        | B      | E        | M     | L1    | L     | N        | C        | H      |
|-----------------|----------------|------------|------------|----------|--------|----------|-------|-------|-------|----------|----------|--------|
| SLR-788-6-8     | 0.65           | 1.12       | 4.48       | 32.5±1.5 | 32.5±1 | 24±1.5   | 69±2  | 136±2 | 168±2 | 16±1     | 11±1     | 19±0.5 |
| SLR-788-7/8-8   | 0.95           | 2          | 8          | 45±2     | 36±1   | 26.5±1.5 | 88±2  | 170±2 | 208±2 | 20±1     | 13±1     | 23±0.8 |
| SLR-788-10-8    | 1.71           | 3.15       | 12.6       | 53±2     | 42±1   | 31±1.5   | 105±2 | 207±3 | 254±3 | 23±1     | 15.5±1   | 29.5±1 |
| SLR-788-13-8    | 3.13           | 5.3        | 21.2       | 63.8±2   | 50±1.5 | 40±2     | 135±2 | 248±3 | 305±3 | 32±1.5   | 17±1.5   | 38±1   |
| SLR-788-16-8    | 5.44           | 8          | 32         | 68±3     | 61±1.5 | 45±2     | 161±2 | 295±3 | 367±3 | 37.5±1.5 | 21.5±1.5 | 45±1   |
| SLR-788-18/20-8 | 9.5            | 12.5       | 50         | 90.5±3   | 74±2   | 56±2     | 194±3 | 356±4 | 434±4 | 49±2     | 25±2     | 50±2   |
| SLR-788-22-8    | 16             | 15         | 60         | 100.5±3  | 97±2   | 70±2.5   | 224±3 | 441±4 | 536±4 | 55±2     | 33±2     | 62±2   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection ◇ 100% 进行磁粉探伤



- ◇ 非承载条件下可旋转调节方向!

### SLR268-G80 SWIVEL HOOK WITH LATCH

80级含舌旋转钩

SLR268

| ITEM NO.     | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±2  | B±2.5 | E±1.5 | H±1.5 | C±2 | L±4   |
|--------------|----------------|------------|------------|------|-------|-------|-------|-----|-------|
| 8-SLR268-7/8 | 0.85           | 2          | 8          | 35.5 | 88.5  | 27    | 23.5  | 25  | 190   |
| 8-SLR268-10  | 1.54           | 3.15       | 12.6       | 42   | 104.5 | 32    | 29.5  | 34  | 233   |
| 8-SLR268-13  | 3.04           | 5.3        | 21.2       | 49   | 135   | 40    | 38    | 41  | 291.5 |
| 8-SLR268-16  | 5.36           | 8          | 32         | 61   | 161   | 45    | 45.4  | 53  | 352   |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)



## G80 SWIVEL HOOKS 80级 旋转钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection ◇ 100% 进行磁粉探伤
- ◆ Can be Rotated under Non-load Conditions!
- ◇ 非承载条件下可旋转调节方向!



### SLR040-G80 SWIVEL HOOK WITH LATCH

#### 80级含舌旋转货钩

**SLR040**

| ITEM NO.    | WEIGHT (kg) | WLL (T) | B.L (T) | A±1.2 | E±1.5 | B±2.5 | H±1  | K±2   | L±2.5 | M±1  |
|-------------|-------------|---------|---------|-------|-------|-------|------|-------|-------|------|
| 8-SLR040-06 | 0.34        | 1.12    | 4.48    | 32    | 17    | 22.5  | 9    | 109   | 137   | 16   |
| 8-SLR040-08 | 1.02        | 2       | 8       | 42    | 21.5  | 35    | 15.8 | 150   | 192   | 21   |
| 8-SLR040-10 | 1.24        | 3.15    | 12.6    | 42.5  | 26    | 35    | 15.8 | 162.5 | 208.5 | 23   |
| 8-SLR040-13 | 3.6         | 5.3     | 21.2    | 48    | 32.5  | 39    | 18   | 191   | 246   | 31   |
| 8-SLR040-16 | 4.66        | 8       | 32      | 62    | 43    | 53    | 25   | 243.5 | 313   | 34   |
| 8-SLR040-20 | 7.4         | 12.5    | 50      | 68    | 49.5  | 51    | 28.5 | 276.5 | 363.5 | 41.5 |
| 8-SLR040-22 | 10.6        | 15      | 60      | 79    | 54.5  | 65    | 32   | 332   | 431   | 55.7 |
| 8-SLR040-26 | 21.4        | 21.2    | 84.8    | 105   | 81    | 114   | 40   | 429.5 | 545.5 | 70   |
| 8-SLR040-32 | 32          | 31.5    | 126     | 105   | 100   | 96    | 40   | 465.3 | 596   | 76.2 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection ◇ 100% 进行磁粉探伤
- ◆ Can be Rotated under Non-load Conditions!
- ◇ 非承载条件下可旋转调节方向!



### SLR616-G80 CLEVIS SWIVEL HOOK

#### 80级无舌羊角旋转钩

**SLR616**

Suitable for EN818-2 G80 chain 6mm 配合G80链条6mm

| ITEM NO.   | WEIGHT (kg) | WLL (T) | B.L (T) | A±1 | B±1 | C±1  | M±1 | E±1 | L±2 |
|------------|-------------|---------|---------|-----|-----|------|-----|-----|-----|
| 8-SLR616-6 | 0.63        | 1.12    | 4.48    | 10  | 35  | 56.5 | 69  | 25  | 152 |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 6-8 WLL1.12T CE SLR + BATCH NUMBER (批号)



## G80 CLEVIS GRAB HOOK 80级 羊角翅钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤



### SLR086-G80 CLEVIS GRAB HOOK 80级羊角翅钩

**SLR086**


| ITEM NO.         | WEIGHT (kg) | WLL (T) | B.L (T) | E ±1 | A ±0.5 | H ±1 | W ±1 | L ±2  |
|------------------|-------------|---------|---------|------|--------|------|------|-------|
| <b>SLR86-6</b>   | 0.25        | 1.12    | 4.48    | 8    | 8      | 17.7 | 21.5 | 77.3  |
| <b>SLR86-7/8</b> | 0.32        | 2       | 8       | 10.5 | 9.5    | 18.5 | 33.5 | 89    |
| <b>SLR86-10</b>  | 0.73        | 3.15    | 12.6    | 13   | 12.5   | 29   | 46   | 126   |
| <b>SLR86-13</b>  | 1.6         | 5.3     | 21.2    | 16.5 | 15     | 42.7 | 57.5 | 163.5 |
| <b>SLR86-16</b>  | 2.8         | 8       | 32      | 19   | 18.5   | 45.4 | 74   | 183.5 |
| <b>SLR86-20</b>  | 5           | 12.5    | 50      | 24   | 23     | 56   | 74   | 219   |
| <b>SLR86-22</b>  | 6.3         | 15      | 60      | 27   | 27     | 68.5 | 90   | 254   |
| <b>SLR86-26</b>  | 14.5        | 21.2    | 84.8    | 30   | 30     | 77   | 102  | 309   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记) : 10-WLL3.15T CE SLR + BATCH NUMBER (批号)

- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理) : Powder plastified (喷塑)
- ◆ Colour code (色号) : Red (红色) RAL3020
- Yellow (黄色) RAL1003.



### SLR313-G80 CLEVIS GRAB HOOK WITH SAFETY PIN 80级带挡销羊角翅钩

**SLR313**

**With safety pin 配备安全销，安全防脱**

| ITEM NO.          | WEIGHT (kg) | WLL (T) | B.L (T) | A ±0.5 | B ±1.2 | E ±0.5 | M ±2  | L ±2  |
|-------------------|-------------|---------|---------|--------|--------|--------|-------|-------|
| <b>SLR313-6</b>   | 0.28        | 1.12    | 4.48    | 8      | 32     | 8      | 43.5  | 75    |
| <b>SLR313-7/8</b> | 0.33        | 2       | 8       | 9.5    | 35     | 11     | 50    | 89    |
| <b>SLR313-10</b>  | 0.89        | 3.15    | 12.6    | 12.5   | 45.5   | 13     | 72    | 126.5 |
| <b>SLR313-13</b>  | 1.85        | 5.3     | 21.2    | 15     | 53     | 16.5   | 96    | 163.5 |
| <b>SLR313-16</b>  | 3.24        | 8       | 32      | 18.5   | 69.5   | 19     | 112.5 | 183.5 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍


Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)



## CLEVIS SHORTENING HOOK 羊角翅钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020 Yellow (黄色) RAL1003



### SLR064-CLEVIS SHORTENING HOOK

羊角翅钩

SLR064


| ITEM NO.    | WEIGHT (KG) | WLL (T) | B.L (T) | A±2  | B±2  | E±2 | M±3   | L±3 | Ø±3  | N±3  |
|-------------|-------------|---------|---------|------|------|-----|-------|-----|------|------|
| 8-SLR-64-06 | 0.25        | 1.12    | 4.48    | 8    | 32   | 8   | 44    | 75  | 7.8  | 26.7 |
| 8-SLR-64-7  | 0.32        | 2       | 8       | 10   | 39   | 11  | 56    | 93  | 8.8  | 30   |
| 8-SLR-64-10 | 0.71        | 3.15    | 12.6    | 13   | 46   | 14  | 74    | 127 | 13   | 44.5 |
| 8-SLR-64-13 | 1.38        | 5.3     | 21.2    | 17   | 56   | 18  | 84    | 154 | 16.4 | 52.5 |
| 8-SLR-64-16 | 2.62        | 8       | 32      | 21.5 | 73.5 | 21  | 113   | 184 | 21.3 | 64   |
| 8-SLR-64-20 | 4.13        | 12.5    | 50      | 24   | 77   | 24  | 126.5 | 212 | 24.3 | 85   |
| 8-SLR-64-22 | 6.3         | 15      | 60      | 27   | 91   | 27  | 148   | 247 | 26.3 | 97.5 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记): 1/4 G80 SLR + BATCH NUMBER (批号)

- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020 Yellow (黄色) RAL1003.



### SLR142-G80 DEEP THROAT CLEVIS GRAB HOOK

80级深喉羊角抓钩

SLR142

| ITEM NO.      | WEIGHT (KG) | WLL (T) | B.L (T) | A±2  | B±2  | E±2  | M±3 | L±3   |
|---------------|-------------|---------|---------|------|------|------|-----|-------|
| 8-SLR-142-06  | 0.2         | 1.12    | 4.48    | 7.5  | 31.5 | 8    | 45  | 85    |
| 8-SLR-142-7/8 | 0.5         | 2       | 8       | 9.5  | 37.5 | 10.5 | 57  | 106   |
| 8-SLR-142-10  | 0.75        | 3.15    | 12.6    | 12.5 | 47.5 | 13   | 74  | 127   |
| 8-SLR-142-13  | 1.63        | 5.3     | 21.2    | 15   | 58.5 | 15.5 | 89  | 165.5 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力


- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)



## CLEVIS SHORTENING HOOK

### 羊角翅钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



## SLR871-CLEVIS ANGLE REGULATOR HOOK

### 羊角调节器


SLR871

| ITEM NO. | WEIGHT/KG | WLL/T | B.L/T | A ±1 | B ±1 | C ±1 | D ±1 | E ±1 | F ±1 | M ±2 | L ±3  | K ±3  |
|----------|-----------|-------|-------|------|------|------|------|------|------|------|-------|-------|
| 6-8      | 0.31      | 1.12  | 4.48  | 8    | 29.5 | 17   | 25   | 8    | 10   | 39   | 81.6  | 53    |
| 8-8      | 0.62      | 2     | 8     | 9.5  | 37   | 22   | 29   | 10.5 | 11   | 50.5 | 102   | 65.5  |
| 10-8     | 1.24      | 3.15  | 12.6  | 12   | 48   | 28   | 36.5 | 12.6 | 15   | 66   | 125.5 | 80    |
| 13-8     | 2.5       | 5.3   | 21.2  | 15   | 61   | 35   | 49   | 16.5 | 20   | 82.5 | 160.5 | 105   |
| 16-8     | 4.99      | 8     | 32    | 18.5 | 74   | 44   | 64   | 19   | 27   | 102  | 200   | 133   |
| 20-8     | 8.25      | 12.5  | 60    | 23   | 92   | 58   | 65.6 | 24   | 27   | 119  | 243   | 153.7 |

## SPECIAL TYPE CROOK HOOK WITH SAFETY PIN

### 带保险销异型羊角抓钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



## SLR712-SPECIAL TYPE CROOK HOOK WITH SAFETY PIN

### 带保险销异型羊角抓钩

SLR712

| ITEM NO.     | WEIGHT (KG) | WLL (T) | B.L (T) | A ±2 | B ±2 | E ±2 | M ±3 | N ±3 | L ±3 |
|--------------|-------------|---------|---------|------|------|------|------|------|------|
| 8-SLR-712-8  | 0.6         | 2       | 8       | 9    | 43   | 9.5  | 61   | 32   | 102  |
| 8-SLR-712-10 | 1           | 3.15    | 12.6    | 12   | 49   | 12   | 75   | 40   | 125  |
| 8-SLR-712-13 | 2.7         | 5.3     | 21.12   | 14.5 | 60   | 15   | 99.3 | 52   | 160  |
| 8-SLR-712-16 | 3.7         | 8       | 32      | 17.3 | 73   | 18   | 121  | 61   | 188  |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍  
Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)



## SPECIAL TYPE CROOK HOOK WITH SAFETY PIN 带档销异型羊角抓钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ Suitable for EN818-2 G80 chain ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (质塑)
- ◆ Colour code (色号): Red (红色) RAL3020 Yellow (黄色) RAL1003



### SLR549-SPECIAL TYPE CROOK HOOK WITH SAFETY PIN

**SLR549**

#### 带档销异型羊角抓钩

| ITEM NO.      | WEIGHT (KG) | WLL (T) | B.L (T) | Ø±2 | E±2  | D±2 | R±3   | M±3  | L±3   |
|---------------|-------------|---------|---------|-----|------|-----|-------|------|-------|
| 8-SLR-549-7/8 | 0.43        | 2       | 8       | 16  | 10.5 | 40  | 68    | 61   | 104   |
| 8-SLR-549-10  | 0.9         | 3.15    | 12.6    | 22  | 13   | 52  | 83    | 78.5 | 133.5 |
| 8-SLR-549-13  | 1.62        | 5.3     | 21.2    | 28  | 15   | 64  | 106.5 | 99.5 | 164.5 |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

## G80 DEEP THROAT EYE GRAB HOOK 80级深喉眼型抓钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection 100% 进行磁粉探伤



### SLR141-G80 DEEP THROAT EYE GRAB HOOK

**SLR141**

#### 80级深喉眼型抓钩

| TIEM CODE    | WEIGHT (Kg) | WLL (T) | BF (T) | D±1 | E±0.3 | B±1.2 | R±1.5 | L±1.5 |
|--------------|-------------|---------|--------|-----|-------|-------|-------|-------|
| 8-SLR141-6   | 0.16        | 1.12    | 4.48   | 15  | 7     | 45    | 56    | 83    |
| 8-SLR141-7/8 | 0.35        | 2       | 8      | 16  | 9.6   | 52    | 74.3  | 106.5 |
| 8-SLR141-10  | 0.75        | 3.15    | 12.6   | 21  | 13    | 66    | 84.5  | 124.5 |
| 8-SLR141-13  | 1.5         | 5.3     | 21.2   | 26  | 16.5  | 96    | 114   | 170   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍


Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)



## G80 EYE GRAB HOOK 80级 眼型翅钩 (调节链条)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ Suitable for EN818-2 G80 chain ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020 Yellow (黄色) RAL1003



### SLR085-G80 EYE SHORTENING GRAB HOOK 80级眼型翅钩


**SLR085**

| ITEM CODE    | WEIGHT (Kg) | WLL (T) | BF (T) | E ± 0.5 | Φ ± 1 | H ± 1 | R ± 2 | L ± 2 | M ± 2 |
|--------------|-------------|---------|--------|---------|-------|-------|-------|-------|-------|
| 8-SLR085-6   | 0.14        | 1.12    | 4.48   | 8       | 13.5  | 17.9  | 51.4  | 75.3  | 45.5  |
| 8-SLR085-7/8 | 0.245       | 2       | 8      | 10.8    | 18    | 20    | 61.5  | 91.2  | 53    |
| 8-SLR085-10  | 0.65        | 3.15    | 12.6   | 13      | 20    | 29    | 80    | 122   | 71    |
| 8-SLR085-13  | 1.39        | 5.3     | 21.2   | 16.5    | 26    | 42.8  | 99.7  | 158   | 90    |
| 8-SLR085-16  | 2.2         | 8       | 32     | 20      | 30.5  | 47.7  | 104   | 169   | 113   |
| 8-SLR085-20  | 4.6         | 12.5    | 50     | 25      | 37.5  | 56    | 140   | 219   | 143   |
| 8-SLR085-22  | 8.2         | 15      | 60     | 28      | 44    | 68    | 165   | 259   | 160   |
| 8-SLR085-26  | 9.8         | 21.2    | 84.8   | 30      | 44    | 77    | 188.8 | 298   | 171   |
| 8-SLR085-32  | 19.4        | 31.5    | 126    | 38      | 57    | 95    | 228   | 361   | 229   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍  
Above Working Load Limit is based on side pull. 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection 100% 进行磁粉探伤



### SLR317-G80 EYE SHORTENING GRAB HOOK WITH SAFETY PIN G80 安全销型眼型带翅抓钩

**SLR317**

With safety pin. 配备安全销, 安全防脱

| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | A       | B        | D        | E          | L          | Φ        |
|--------------|-------------|---------|---------|---------|----------|----------|------------|------------|----------|
| 8-SLR317-7/8 | 0.29        | 2       | 8       | 60 ± 2  | 33.5 ± 1 | 9.5 ± 1  | 10.5 ± 1   | 88.5 ± 1.2 | 17 ± 1   |
| 8-SLR317-10  | 0.75        | 3.15    | 12.6    | 80 ± 2  | 46 ± 1   | 13 ± 1   | 13 ± 1-1.5 | 121.5 ± 3  | 20 ± 1   |
| 8-SLR317-13  | 1.62        | 5.3     | 21.2    | 100 ± 3 | 57.5 ± 2 | 15.5 ± 2 | 16.5 ± 1-2 | 158 ± 3    | 26 ± 1.5 |
| 8-SLR317-16  | 3.0         | 10      | 40      | 119 ± 4 | 74 ± 3   | 19 ± 2   | 18.5 ± 1-2 | 183 ± 4    | 36 ± 2   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍  
Above Working Load Limit is based on side pull. 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记以8-SLR317-10为例): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)



## G80 EYE GRAB HOOK 80级 眼型翅钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◇ 100% magnaflix crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020
- ◆ Yellow (黄色) RAL1003



### SLR065-G80 ITALIAN TYPE EYE SHORTENING GRAB HOOK G80 意式眼型翅钩

**SLR065**


| TIEM CODE   | WEIGHT (Kg) | WLL (T) | BF (T) | $\Phi \pm 1$ | $B \pm 1.5$ | $E \pm 0.5$ | $L \pm 2$ |
|-------------|-------------|---------|--------|--------------|-------------|-------------|-----------|
| 8-SLR065-06 | 0.18        | 1.12    | 4.48   | 13.5         | 44          | 8           | 75.5      |
| 8-SLR065-07 | 0.307       | 2       | 8      | 15           | 48.5        | 9           | 88        |
| 8-SLR065-10 | 0.68        | 3.15    | 12.6   | 20           | 72          | 13          | 125       |
| 8-SLR065-13 | 1.34        | 5.3     | 21.2   | 25           | 91          | 17          | 159       |
| 8-SLR065-16 | 2.09        | 8       | 32     | 30           | 110         | 21          | 180       |
| 8-SLR065-20 | 3.84        | 12.5    | 50     | 35           | 133.5       | 25          | 211       |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Above Working Load Limit is based on side pull 表格中所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记以 8-SLR065-10 为例): 10-8 WLL3.15T CE SLR+BATCH NUMBER(批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflix crack detection
- ◇ 100% 进行磁粉探伤



### SLR768-G80 EYE SHORTENING GRAB HOOK 80级眼型翅钩

**SLR768**


| ITEM NO.     | WEIGHT/Kg | WLL/T | B.L/T | $E \pm 1$ | $\Phi \pm 1$ | $D \pm 1.5$ | $M \pm 2$ | $L \pm 3$ |
|--------------|-----------|-------|-------|-----------|--------------|-------------|-----------|-----------|
| 08-SLR768-06 | 0.15      | 1.12  | 4.48  | 8         | 13.5         | 30.5        | 43.5      | 73        |
| 08-SLR768-08 | 0.3       | 2     | 8     | 11        | 17.5         | 37          | 53        | 92.7      |
| 08-SLR768-10 | 0.79      | 3.15  | 12.6  | 13.5      | 22           | 48.5        | 72        | 129       |
| 08-SLR768-13 | 1.67      | 5.3   | 21.2  | 17        | 27           | 59          | 96        | 166       |
| 08-SLR768-16 | 2.74      | 8     | 32    | 19        | 36           | 75          | 116       | 186       |
| 08-SLR768-20 | 4.72      | 12.5  | 50    | 24        | 43.5         | 89.5        | 143       | 227       |
| 08-SLR768-22 | 8.2       | 15    | 60    | 27        | 48.5         | 100.5       | 160.5     | 260.5     |





## G80 CLEVIS GRAB HOOK 80级 羊角抓钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN818-2 G80 chain
- ◇ 与EN818-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤



### SLR028-CLEVIS GRAB HOOK 羊角抓钩

SLR028


| ITEM NO.      | WEIGHT (KG) | WLL (T) | B.L (T) | A ±2 | B ±2 | E ±2 | H ±3 | K ±3  | L ±3  |
|---------------|-------------|---------|---------|------|------|------|------|-------|-------|
| 8-SLR-28-1/4  | 0.22        | 1.2     | 4.8     | 8    | 34   | 8    | 19.5 | 57    | 90.5  |
| 8-SLR-28-9/32 | 0.31        | 2       | 8       | 9.5  | 41   | 9.5  | 23   | 65.3  | 106.5 |
| 8-SLR-28-3/8  | 0.7         | 3.2     | 12.8    | 12.7 | 46   | 12.5 | 31   | 82    | 137   |
| 8-SLR-28-1/2  | 1.8         | 5.4     | 21.6    | 16   | 61   | 16.7 | 43   | 113   | 184.5 |
| 8-SLR-28-5/8  | 3.1         | 8.2     | 32.8    | 19.5 | 68.5 | 20   | 49   | 129.5 | 215   |
| 8-SLR-28-3/4  | 4.1         | 12.8    | 51.2    | 24   | 88   | 24   | 58   | 152   | 254   |
| 8-SLR-28-7/8  | 6.2         | 15.5    | 62      | 27   | 101  | 26   | 64.8 | 178   | 295   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记) : 1/4 G80 SLR + BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤



### SLR686-CLEVIS GRAB HOOK 羊角抓钩

SLR686

| ITEM NO.      | WEIGHT (KG) | WLL (T) | B.L (T) | A ±2 | B ±2 | C ±2 | D ±2 | E ±3 | F ±3 | H ±3 | L ±3  |
|---------------|-------------|---------|---------|------|------|------|------|------|------|------|-------|
| 8-SLR-686-3/8 | 0.6         | 3.15    | 12.6    | 48   | 12.5 | 27.5 | 71   | 12   | 29   | 24   | 104.5 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍


Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)



## G80 U.S TYPE EYE GRAB HOOK 80级 美标眼型抓钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Suitable for EN18-2 G80 chain ◇ 与EN18-2标准80级链条配合使用
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020 Yellow (黄色) RAL1003



### SLR027-G80 U.S TYPE EYE GRAB HOOK 80级美标眼型抓钩


**SLR027**

| ITEM CODE     | WEIGHT (Kg) | WLL (T) | BF (T) | E ± 0.5 | D ± 1 | H ± 1 | K ± 2 | L ± 2 |
|---------------|-------------|---------|--------|---------|-------|-------|-------|-------|
| 8-SLR027-1/4  | 0.13        | 1.2     | 4.8    | 8       | 13    | 19    | 54    | 81    |
| 8-SLR027-9/32 | 0.27        | 2       | 8      | 9.5     | 15    | 23    | 64    | 98    |
| 8-SLR027-3/8  | 0.55        | 3.2     | 12.8   | 12.5    | 20    | 30    | 82    | 125   |
| 8-SLR027-1/2  | 1.3         | 5.4     | 21.6   | 17      | 25    | 42    | 106   | 165   |
| 8-SLR027-5/8  | 2.48        | 8.2     | 32.8   | 20      | 30    | 49    | 127   | 196.6 |
| 8-SLR027-3/4  | 3.8         | 12.8    | 51.2   | 23      | 34.5  | 56    | 152   | 231.6 |
| 8-SLR027-7/8  | 5.8         | 15.5    | 62     | 28.6    | 40.5  | 65.6  | 175   | 267.6 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍  
Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力

- Regular mark (常规标记): 1/4 G80 SLR + BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code (色号): Red (红色) RAL3020 Yellow (黄色) RAL1003



### SLR217-EYE TYPE BELT WING HOOK 眼型带翅抓钩

**SLR217**

| ITEM NO.      | WEIGHT (KG) | WLL (T) | B.L (T) | Ø ± 2 | E ± 2 | M ± 2 | H ± 3 | R ± 3 | L ± 3 |
|---------------|-------------|---------|---------|-------|-------|-------|-------|-------|-------|
| 8-SLR-217-7/8 | 0.29        | 2       | 8       | 17    | 10.5  | 60    | 21.5  | 64.5  | 96    |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍  
Above Working Load Limit is based on side pull 表格中所列工作拉力是在侧拉情况下的工作拉力


- Regular mark (常规标记以 8-SLR065-10 为例): 10-8 WLL3.15T CE SLR+BATCH NUMBER(批号)



## CLEVIS GRAB HOOK

### 羊角抓钩

- ◆ Forged alloy steel-Quenched and tempered
- ◇ 优质合金钢锻造。经过热处理。
- ◆ Only for lashing and pulling. Not for lifting
- ◇ 仅用于捆绑和拖拉。不能用于起重。
- ◆ Regular mark(常规标记) : WLL2T



#### SLR063 – SPECIAL-SHAPED EYE TYPE HOOK

##### 异型眼型抓钩


**SLR063**

| ITEM NO.      | WEIGHT<br>(Kg) | WLL<br>(T) | B.L<br>(T) | B ±1 | D ±1 | E ±0.5 | H ±1 | L ±2 | Φ ±0.5 |
|---------------|----------------|------------|------------|------|------|--------|------|------|--------|
| SLR-063-1.86T | 0.4            | 1.86       | 7.44       | 57   | 13   | 10     | 18.5 | 100  | 9      |
| SLR-063-2T    | 0.5            | 2          | 8          | 58   | 13   | 10     | 20   | 105  | 9      |
| SLR-063-5T    | 1.7            | 5          | 20         | 92   | 20   | 16     | 30   | 170  | 15     |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。

Regular mark (常规标记) : 1/2 WLL5T

- ◆ Forged alloy steel-Quenched and tempered
- ◇ 优质合金钢锻造。经过热处理。
- ◆ Only for lashing and pulling. Not for lifting
- ◇ 仅用于捆绑和拖拉。不能用于起重。
- ◆ Regular mark(常规标记) : WLL2T



#### SLR025 – SPECIAL-SHAPED EYE TYPE HOOK

##### 异型眼型抓钩

**SLR025**


| ITEM NO.    | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | B ±2 | Φ ±2 | K ±2 | L ±3 |
|-------------|----------------|------------|------------|------|------|------|------|
| 8-SLR-25-2T | 0.7            | 2          | 8          | 14.5 | 20   | 108  | 1540 |
|             |                |            |            |      |      |      |      |
|             |                |            |            |      |      |      |      |
|             |                |            |            |      |      |      |      |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。



## CONTAINER LIFTING CLEVIS LINK 集装箱索具配件

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理) : Powder plastified ( 喷漆 )



### SLR645-G80 CONTAINER LIFTING CLEVIS LINK

**SLR645**


#### 80级集装箱索具配件

Available in G100 此产品也可供应100级!

| ITEM NO.   | WEIGHT (kg) | WLL (T) G80 | B.L (T) G80 | WLL (T) G100 | B.L (T) G100 | A±0.3 | B±1 | C±0.3 | D±0.3 | E±1 | F±0.5 | M±0.3 | N±1 | G±0.1 | L±1.5 |
|------------|-------------|-------------|-------------|--------------|--------------|-------|-----|-------|-------|-----|-------|-------|-----|-------|-------|
| SLR-645-13 | 1.23        | 5.3         | 21.2        | 6.7          | 26.8         | 21    | 90  | 50    | 21.5  | 55  | 15    | 35    | 93  | 16.2  | 170   |

## HOOK WITH HALF LINK 单环滑钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection ◇ 100% 进行磁粉探伤



### SLR006-HOOK WITH HALF LINK

**SLR006**

#### 单环滑钩

| ITEM NO.     | WEIGHT (kg) | WLL (T) | B.L (T) | E±2  | B±1  | Ø±1.5 | K±3   | L±3   |
|--------------|-------------|---------|---------|------|------|-------|-------|-------|
| 8-SLR006-6   | 0.35        | 1.12    | 4.48    | 22   | 15   | 31    | 105   | 132   |
| 8-SLR006-7/8 | 0.47        | 2       | 8       | 29   | 18   | 37    | 120   | 149   |
| 8-SLR006-10  | 1.3         | 3.15    | 12.6    | 35.3 | 26   | 47    | 164   | 207   |
| 8-SLR006-13  | 3           | 5.3     | 21.2    | 40   | 30   | 60    | 205   | 257   |
| 8-SLR006-16  | 4.4         | 8       | 32      | 44   | 35   | 70    | 224   | 283.4 |
| 8-SLR006-20  | 7.3         | 12.5    | 50      | 54.3 | 41.8 | 83    | 264   | 337.5 |
| 8-SLR006-22  | 12          | 15      | 60      | 71   | 57   | 100   | 325.6 | 414.6 |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 7/8-8 WLL2T CE SLR



## FORGED GRAB HOOK 锻造抓钩

- ◆ Forged alloy steel
- ◇ 锻造合金钢。
- ◆ Quenched and tempered
- ◇ 经过严格的热处理。
- ◆ Not for lifting, only for lashing or pulling
- ◇ 不能用于起重，仅用于捆绑和拖拉。
- ◆ Can be Rotated under Non-load Conditions!
- ◇ 非承载条件下可旋转调节方向!



### SLR728-ALLOY GRAB HOOK FOR WEBBING

合金钢吊带带翅抓钩

SLR728


| ITEM NO. | WEIGHT (kg) | LC (T) | B.L (T) | A ±1 | E ±1 | G ±1 | H ±1 | M ±1 | N ±1 | L ±3 |
|----------|-------------|--------|---------|------|------|------|------|------|------|------|
| 8m       | 0.56        | 3.8    | 7.6     | 58   | 12   | 30   | 24   | 14.5 | 18   | 177  |
|          |             |        |         |      |      |      |      |      |      |      |
|          |             |        |         |      |      |      |      |      |      |      |
|          |             |        |         |      |      |      |      |      |      |      |
|          |             |        |         |      |      |      |      |      |      |      |

Ultimate load is 2 times the Working Load Limit. 破断拉力为工作拉力的2倍。

- Regular mark (常规标记) : BMM WLL3.8T

## G80 SWIVEL HOOKS 80级 旋转钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破断测试
- ◇ 100% magnalux crack detection ◇ 100% 进行磁粉探伤
- ◆ Can be Rotated under Non-load Conditions!
- ◇ 非承载条件下可旋转调节方向!



### SLR787-SWIVEL BELT SLING HOOK

旋转吊带钩


SLR787

| ITEM NO. | WEIGHT (kg) | A ±1 | B ±1.5 | E ±1 | N ±1 | H ±1 | L ±2 |
|----------|-------------|------|--------|------|------|------|------|
| 1T       | 0.45        | 49   | 68     | 35.5 | 17   | 18.3 | 135  |
|          |             |      |        |      |      |      |      |
|          |             |      |        |      |      |      |      |
|          |             |      |        |      |      |      |      |



## G80 CLEVIS WEBBING SLING HOOK 80级 羊角拉索带钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◇ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



SLR016-G80 CLEVIS WEBBING SLING HOOK  
80级羊角拉索带钩

SLR016

| ITEM NO.   | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A±1 | B±2 | E±1 | L±2 |
|------------|----------------|------------|------------|-----|-----|-----|-----|
| SLR16-2.2T | 1.47           | 2.2        | 8.8        | 61  | 119 | 47  | 167 |
|            |                |            |            |     |     |     |     |
|            |                |            |            |     |     |     |     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

## G80 WEBBING SLING HOOK 80级 眼型吊带钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



SLR017-G80 WEBBING SLING HOOK  
80级眼型吊带钩

SLR017

| ITEM NO.      | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A±1 | B±2 | E±1 | L±2 |
|---------------|----------------|------------|------------|-----|-----|-----|-----|
| 8-SLR017-1.6T | 1.2            | 1.6        | 6.4        | 55  | 111 | 33  | 150 |
|               |                |            |            |     |     |     |     |
|               |                |            |            |     |     |     |     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍


- Regular mark (常规标记): WLL3T CE SLR + BATCH NUMBER (批号)



## G80 FOR WEB SLING

### 80级 吊带索具配件

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 每件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



**SLR090-G80 EYE WEBBING SLING HOOK**  
80级眼型吊带钩


**SLR090**

| ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±1 | W±1.5 | M±2 | N±1 | B±2 | E±1 | L±2 | L±0.5 | K±2   |
|---------------|----------------|------------|------------|-----|-------|-----|-----|-----|-----|-----|-------|-------|
| 8-SLR090-75mm | 2.1            | 2.75       | 11         | 23  | 81.5  | 80  | 40  | 141 | 45  | 194 | 14.5  | 144.5 |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : WLL2.75T CE SLR +BATCH NUMBER(批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 每件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



**SLR632-G80 HOOK FOR WEB SLING**  
80级吊带钩

**SLR632**

| ITEM NO.     | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±2 | B±2 | D±1 | E±1.5 | L±2 |
|--------------|----------------|------------|------------|-----|-----|-----|-------|-----|
| 8-SLR-632-1T | 0.81           | 1          | 4          | 72  | 85  | 32  | 31    | 135 |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : WLL1T CE SLR + BATCH NUMBER (批号)



## G80 CLEVIS LINK FOR WEB SLING 80级 异型吊带环

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



SLR235-G80 CLEVIS LINK FOR WEB SLING  
80级异型吊带环

SLR235


| ITEM NO.    | WEIGHT (kg) | WLL (T) | B.L (T) | A ±1 | B ±1 | W ±1 | L ±1 |
|-------------|-------------|---------|---------|------|------|------|------|
| SLR235-10MM | 0.23        | 3.15    | 12.6    | 12   | 41   | 61   | 76   |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

## FN TYPE WEBBING HOOK FN型双面挂带钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



SLR852-FN TYPE WEBBING HOOK  
FN型双面挂带钩

SLR852


| ITEM NO. | WEIGHT/KG | WLL/T | A ±1 | B ±1.5 | D ±1 | E ±1 | F ±1 | H ±1 | N ±0.5 | L ±2  |
|----------|-----------|-------|------|--------|------|------|------|------|--------|-------|
| 1T       | 0.795     | 1     | 44   | 91     | 22   | 25.5 | 79   | 28.4 | 12     | 133.5 |
| 2T       | 1.63      | 2     | 72   | 132    | 25   | 30   | 86   | 34.5 | 15     | 156   |
| 3T       | 2.45      | 3     | 103  | 167    | 29   | 32.5 | 95   | 38   | 18     | 172   |
| 4T       | 4.36      | 4     | 146  | 218    | 35   | 41   | 126  | 41   | 21     | 208   |
| 5T       | 7.74      | 5     | 172  | 269    | 41   | 44   | 154  | 51   | 23     | 256   |





## G80 SLIDING EYE CHOKE HOOK 80级滑眼钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤



### SLR072-G80 SLIDING EYE CHOKE HOOK 80级滑眼钩

**SLR072**


| ITEM NO.         | WEIGHT (kg) | WLL (T) | B.L (T) | D ±1 | A ±1.5 | B ±1.5 | E ±3 | L ±2.5 |
|------------------|-------------|---------|---------|------|--------|--------|------|--------|
| 8-SLR072-3/8-1/2 | 0.68        | 1.6     | 8       | 17   | 50     | 71     | 18   | 132    |
| 8-SLR072-5/8     | 1.21        | 2       | 10      | 22   | 63.5   | 79     | 20   | 151.3  |
| 8-SLR072-3/4     | 1.99        | 3       | 15      | 28   | 69     | 103    | 26   | 170    |
| 8-SLR072-1       | 4.18        | 5       | 25      | 32.5 | 85.7   | 135    | 33   | 213    |

Ultimate load is 5 times the Working Load Limit 破断拉力是工作拉力的5倍

- Regular mark (常规标记) : 3/8-1/2 WLL1.6T CE SLR + BATCH NUMBER (批号)

## G80 EYE ELEPHANT FOOT 80级眼型象脚

- ◆ Forged alloy steel
- ◇ 优质合金钢锻造而成
- ◆ Suitable for G80 lashing chain
- ◇ 与80级捆绑链配合
- ◆ Regular mark: 13-8 WLL5.3T CE SLR



### G80 EYE ELEPHANT FOOT 80级眼型象脚

**SLR088**

| ITEM NO.    | WEIGHT (KG) | WLL/T | B.L/T | Ø ±1 | B ±1 | C ±1 | D ±0.5 | G ±1 | L ±2 |
|-------------|-------------|-------|-------|------|------|------|--------|------|------|
| 8-SLR088-13 | 0.67        | 5     | 20    | 28   | 60   | 30   | 16     | 52.5 | 116  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍



## FORGED HOOKS

### 锻造钩系列

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



#### SLR111- G80 SHACKLE HOOK

#### 80级卸扣钩


**SLR111**

| ITEM NO.      | WEIGHT (kg) | WLL (T) | B.L (T) | A ±1 | B ±2 | D ±0.6 | E ±0.5 | L ±2 |
|---------------|-------------|---------|---------|------|------|--------|--------|------|
| 8-SLR111-8.5T | 5.45        | 8.5     | 34      | 70   | 145  | 30     | 40     | 271  |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : WLL8.5T CE SLR +BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



#### SLR282-LONG HANDLE SLAPPING TONGUE HOOK

#### 长柄弹舌钩

**SLR282**

| ITEM NO.    | WEIGHT (kg) | A   | B  | Ø   | G   | E    | L    |
|-------------|-------------|-----|----|-----|-----|------|------|
| SLR-282-282 | 0.07        | 6.5 | 39 | 6.7 | 9.5 | 20.7 | 89.5 |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : WLL8.5T CE SLR +BATCH NUMBER (批号)



## FORGED HOOKS 锻造钩系列

- ◆ Forged alloy steel—Quenched and tempered
- ◇ 优质合金钢锻造。经过热处理。
- ◆ Regular mark(常规标记) : WLL8T



### SLR232 – EYE TWIST HOOK


合金钢眼型木材弯曲钩

**SLR232**

**Only for lashing and pulling Not for lifing 仅用于捆绑和拖拉 不能用于起重**

| ITEM NO.    | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A ±1 | B ±2 | C ±1.5 | D ±2.5 | E ±0.5 |
|-------------|----------------|------------|------------|------|------|--------|--------|--------|
| 8-SLR232-8T | 6.12           | 8          | 32         | 39   | 170  | 70.4   | 303    | 44.5   |

- ◆ Forged carbon steel—Quenched and tempered
- ◇ 优质碳钢锻造。经过热处理
- ◆ Not for lifing. 不能用于起重
- ◆ Regular mark(常规标记) : WLL1.5T



### SLR280 – ROUND REVERSE EYE HOOK

眼型转脖钩

**SLR280**


**Not for lifing 不能用于起重**

| ITEM NO.    | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A ±1 | B ±2 | C ±1 | D ±2 | E ±1 |
|-------------|----------------|------------|------------|------|------|------|------|------|
| 8-SLR280-6# | 0.8            | 1.5        | 6          | 34   | 98   | 39   | 160  | 24   |
| 8-SLR280-7# | 1.14           | 2          | 8          | 36   | 116  | 50   | 192  | 25   |



## G80 TWIST EYE CHOKE HOOK 80级 眼型转脖钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



**SLR026- G80 TWIST EYE CHOKE HOOK**  
80级眼型转脖钩


**SLR026**

| ITEM NO.       | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A ± 2.5 | B ± 2 | C ± 1.5 | Ø ± 1 | Ø1 ± 2.5 | Ø2 ± 2.5 | Ø3   | E ± 1 | L ± 2.5 |
|----------------|----------------|------------|------------|---------|-------|---------|-------|----------|----------|------|-------|---------|
| 8-SLR026-7/B   | 0.36           | 2          | 8          | 19      | 28    | 16.5    | 17    | 52       | 30.5     | 7.5  | 16    | 123     |
| 8-SLR026-10    | 0.72           | 3.2        | 12.8       | 26      | 40    | 17.5    | 20    | 68       | 39       | 8    | 20    | 157     |
| 8-SLR026-13    | 1.4            | 5.4        | 21.6       | 34      | 43    | 21      | 25    | 87       | 53       | 10   | 27    | 196.5   |
| 8-SLR026-16    | 3.17           | 8.2        | 32.8       | 51      | 45.5  | 31      | 30    | 108      | 64       | 10.5 | 30    | 246     |
| 8-SLR026-18    | 3.8            | 10         | 40         | 49.5    | 53    | 33.5    | 33.5  | 121      | 75       | 12   | 36.5  | 268.6   |
| 8-SLR026-20/22 | 8.95           | 15.3       | 61.2       | 70      | 80    | 44      | 52    | 146      | 84       | 14   | 47    | 367     |
| 8-SLR026-26    | 16.65          | 21.2       | 84.8       | 80      | 80    | 44      | 60    | 180      | 100      | 24.3 | 44    | 417     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



**SLR018-G80 TWIST HOOK FOR WEB SLING**  
80级吊带扭脖钩

**SLR018**

| ITEM NO. | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A ± 1 | B ± 1 | D ± 2 | E ± 1 | G ± 1 | L ± 2 |
|----------|----------------|------------|------------|-------|-------|-------|-------|-------|-------|
| 8-SLR018 | 1.05           | 3          | 12         | 57    | 13    | 100   | 39    | 15    | 160   |
|          |                |            |            |       |       |       |       |       |       |
|          |                |            |            |       |       |       |       |       |       |
|          |                |            |            |       |       |       |       |       |       |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍


- Regular mark (常规标记) : WLL3T CE SLR + BATCH NUMBER (批号)



## FORGED HOOKS

### 挂桶钩

- ◆ Forged carbon steel-Quenched and tempered
- ◇ 优质碳钢锻造，经过热处理
- ◆ Ultimate load is 4 times the Working Load Limit
- ◇ 破断拉力为工作拉力的4倍
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection 100% 进行磁粉探伤
- ◆ Regular mark(常规标记) : WLL1T



#### SLR022 – FORGED HOOKS

##### 挂桶钩

#### SLR022

| ITEM NO.    | WEIGHT (kg) | WLL (T) | B.L (T) | A±2 | B±2 | Φ±1 | D±1.2 | L±2 | W±2 |
|-------------|-------------|---------|---------|-----|-----|-----|-------|-----|-----|
| 8-SLR022-1T | 0.57        | 1       | 4       | 96  | 60  | 38  | 64.5  | 118 | 60  |
| 8-SLR022-2T | 0.55        | 2       | 8       | 102 | 50  | 40  | 66    | 128 | 43  |


Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。

Regular mark (常规标记) : WLL1T

## DOUBLE CLEVIS LINK

### 羊角扣

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



#### SLR869-DOUBLE CLEVIS LINK

##### 羊角扣


#### SLR869

| ITEM NO. | WEIGHT/KG | WLL/T | B.L/T | A±1 | B±1 | C±1  | D±1  | E±1.5 | F±2  | L±3   |
|----------|-----------|-------|-------|-----|-----|------|------|-------|------|-------|
| 7+8-8    | 0.47      | 2     | 8     | 31  | 51  | 36.3 | 9    | 20    | 36   | 103.5 |
| 10-8     | 0.89      | 3.15  | 12.6  | 34  | 62  | 48   | 12.5 | 25    | 46.5 | 130.7 |
| 13-8     | 1.51      | 5.3   | 21.2  | 49  | 83  | 64   | 15   | 31    | 59   | 160   |
| 16-8     | 2.62      | 8     | 32    | 58  | 95  | 69.5 | 19   | 40    | 70   | 190.5 |



## G80 LASHING TYPE HOOK 80级 薄型高强度板钩

- ◆ Suitable for G80 lashing chain
- ◇ 与80级捆绑链配合
- ◆ Forged alloy steel
- ◇ 优质合金钢锻造而成
- ◆ Features quick and easy assembly
- ◇ 快速方便地与链条装配
- ◆ Surface finish (表面处理):
- ◇ Powder plastified (喷塑)
- ◆ Colour code (色号):
- ◇ Red (红色) RAL3020 ◇ Yellow (黄色) RAL1003



### SLR071-LASHING TYPE HOOK

薄型高强度板钩

SLR071

| ITEM No.    | WEIGHT (kg) | WLL (T) | B.L (T) | A        | B        | E          | M         | L       |
|-------------|-------------|---------|---------|----------|----------|------------|-----------|---------|
| 8-SLR071-9  | 0.51        | 2.5     | 10      | 22.5 ± 1 | 12 ± 0.5 | 13.5 ± 0.5 | 90.5 ± 2  | 143 ± 2 |
| 8-SLR071-11 | 0.95        | 3.75    | 15      | 23.5 ± 1 | 14 ± 0.5 | 15.8 ± 0.5 | 109.5 ± 2 | 177 ± 2 |
| 8-SLR071-13 | 1.4         | 5.4     | 21.6    | 31 ± 1   | 16 ± 1   | 18 ± 1     | 129 ± 3   | 207 ± 3 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。

Regular mark (常规标记): 9MM WLL2.5T CE

## G80 LASHING COMPONENTS 80级 捆绑配件

- ◆ Forged alloy steel-Quenched and tempered.
- ◇ 优质合金钢锻造，经过热处理。
- ◆ Ultimate load is 4 times the Working Load Limit.
- ◇ 破断拉力为工作拉力的4倍。
- ◆ Working Load Limit at tip of the hook is: 2T
- ◇ 钩尖处工作拉力为2T。
- ◆ Working Load Limit at bottom of hook is: 6.8T.
- ◇ 钩子底部的工作拉力为6.8T



### SLR108 - FORGED SORTING HOOK

锻造分类钩

SLR108

| ITEM NO.    | WEIGHT (kg) | WLL (T) | WLL (T) | D  | B   | C  | L   | H  |
|-------------|-------------|---------|---------|----|-----|----|-----|----|
| 8-SLR108-2T | 3.09        | 2       | 6.8     | 35 | 170 | 33 | 254 | 49 |
|             |             |         |         |    |     |    |     |    |
|             |             |         |         |    |     |    |     |    |

Regular mark (常规标记): WLL 2T



## BLOCK HOOK 锻造葫芦钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理): Powder plastified (喷塑)



### SLR041- BLOCK HOOK 葫芦钩

**SLR041**

| ITEM NO.           | WEIGHT (kg) | WLL (T) | B.L (T) | Φ  | Φ 1 ± 1 | D    | E ± 0.5 | L ± 1.2 | M ± 1 |
|--------------------|-------------|---------|---------|----|---------|------|---------|---------|-------|
| <b>SLR-41-0.8T</b> | 0.45        | 0.8     | 4       | 21 | 36.5    | 14.5 | 45      | 102.5   | 83.5  |
| <b>SLR-41-1.6T</b> | 0.57        | 1.6     | 8       | 24 | 42      | 16.5 | 50      | 126     | 101   |

Ultimate load is 5 times the Working Load Limit 破断拉力是工作拉力的5倍

- Regular mark (常规标记): WLL0.8T

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理): Powder plastified (喷塑)



### SLR261- BLOCK HOOK 葫芦钩

**SLR261**

| ITEM NO.            | WEIGHT (kg) | WLL (T) | B.L (T) | Φ ± 0.1 | B ± 0.5 | D ± 0.3 | E ± 0.1 | H ± 1 | L ± 1.2 | M ± 1.2 |
|---------------------|-------------|---------|---------|---------|---------|---------|---------|-------|---------|---------|
| <b>SLR-261-1.5T</b> | 0.715       | 1.5     | 6       | 32      | 19.5    | 22      | 30.5    | 28    | 145.5   | 105     |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记): WLL1.5T CE BATCH NUMBER (批号) + SLR



## BLOCK HOOK 锻造葫芦钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnetflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ All load pins are 100% individually inspected and tested
- ◇ 所有销轴进行100%测试，确保相同的硬度品质
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◇ Can be Rotated under Non-load Conditions!
- ◇ 非承载条件下可旋转调节方向!



### SLR254- BLOCK HOOK 葫芦钩

**SLR254**


| ITEM NO.             | WEIGHT (kg) | WLL (T) | B.L (T) | Φ ± 0.1 | D ± 0.3 | E ± 0.1 | L ± 1.2 | M ± 1.2 |
|----------------------|-------------|---------|---------|---------|---------|---------|---------|---------|
| <b>SLR-254-0.25T</b> | 0.27        | 0.25    | 0.5     | 15.6    | 10.8    | 23      | 87.6    | 71      |
| <b>SLR-254-0.75T</b> | 0.55        | 0.75    | 1.5     | 20.5    | 15      | 27      | 110.5   | 82      |
| <b>SLR-254-1.5T</b>  | 1.1         | 1.5     | 3       | 24      | 15      | 32      | 134     | 106.5   |
| <b>SLR-254-3T</b>    | 1.58        | 3       | 6       | 31      | 19      | 42      | 176     | 131     |

Ultimate load is 2 times the Working Load Limit 破断拉力是工作拉力的2倍

- ◆ Regular mark (常规标记): WLL0.75T CE BATCH NUMBER (批号) + SLR

## SLIDING COUPLING TACKLE HOOK 滑车钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnetflux crack detection
- ◇ 100% 进行磁粉探伤



### SLR721-SLIDING COUPLING TACKLE HOOK 滑车钩

**SLR721**


| ITEM NO.            | WEIGHT (KG) | WLL (T) | B.L (T) | A ± 1 | B ± 1 | E ± 2 | F ± 2 | M ± 1 | N ± 1 | G ± 1 | L ± 3 |
|---------------------|-------------|---------|---------|-------|-------|-------|-------|-------|-------|-------|-------|
| <b>8-SLR-721-8</b>  | 0.93        | 2       | 8       | 54    | 40    | 25    | 90    | 19.7  | 9.9   | 28    | 151   |
| <b>8-SLR-721-10</b> | 1.57        | 3.15    | 12.6    | 74    | 48    | 30    | 106   | 12    | 25    | 32    | 158   |
| <b>8-SLR-721-13</b> | 2.67        | 5.3     | 21.2    | 83.5  | 54    | 38    | 131   | 16    | 30    | 37    | 220   |





## G80 CONTAINER LIFTING 80级 集装箱索具配件

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤



**SLR243-G80 CONTAINER LIFTING CLEVIS LINK**  
80级集装箱羊角吊环

**SLR243**


| ITEM NO.   | WEIGHT (kg) | WLL (T) | B.L (T) | A  | B±1 | C±1  | D±2 | E±2 |
|------------|-------------|---------|---------|----|-----|------|-----|-----|
| 8-SLR-13mm | 1.9         | 5.3     | 21.2    | 15 | 60  | 71.5 | 104 | 195 |
|            |             |         |         |    |     |      |     |     |
|            |             |         |         |    |     |      |     |     |
|            |             |         |         |    |     |      |     |     |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

- Regular mark (常规标记) : 13-8 WLL5.3T CE SLR + BATCH NUMBER (批号)

## KB TYPE CLEVIS CONTAINER HOOK KB型羊角集装箱钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



**SLR851-KB TYPE CLEVIS CONTAINER HOOK**  
KB 型羊角集装箱钩


**SLR851**

| ITEM NO. | WEIGHT/KG | WLL/T | B.L/T | A±1 | B±1.5 | C±1 | E±1 | M±2 | N±0.5 | H±1 | L±2   |
|----------|-----------|-------|-------|-----|-------|-----|-----|-----|-------|-----|-------|
| 13-8     | 3.5       | 5.3   | 21.2  | 15  | 57    | 34  | 55  | 147 | 28    | 44  | 357.5 |
|          |           |       |       |     |       |     |     |     |       |     |       |
|          |           |       |       |     |       |     |     |     |       |     |       |
|          |           |       |       |     |       |     |     |     |       |     |       |



## SHANK HOOK WITH EYE SCREW 吊环ROV直杆钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnatlux crack detection
- ◇ 100% 进行磁粉探伤



### SLR552-ALLOY SHANK HOOK WITH EYE SCREW

#### 合金钢ROV吊环直杆钩

**SLR552**

| ITEM CODE     | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A   | B ±3 | E ±1.5 | F <sup>+</sup><br>-0.5 | H    | M ±3 | K ±0.5 | P ±1 | T ±1 | M ±0.5 | D   | R   | N ±2 | L ±5 |
|---------------|----------------|------------|------------|-----|------|--------|------------------------|------|------|--------|------|------|--------|-----|-----|------|------|
| SLR-552-5.4T  | 9.6            | 5.4        | 21.6       | 108 | 55   | 34.2   | 68                     | 29.5 | 128  | 275.5  | 65   | 46   | 23     | 51  | 25  | 50   | 497  |
| SLR-552-12T   | 17.3           | 12         | 60         | 150 | 90   | 54     | 95                     | 45   | 192  | 275.5  | 65   | 70   | 33     | 75  | 35  | 77   | 611  |
| SLR-552-22T   | 29.8           | 22         | 88         | 180 | 87   | 75     | 138                    | 60   | 265  | 283    | 85   | 102  | 41     | 91  | 50  | 106  | 720  |
| SLR-552-31.5T | 44             | 31.5       | 126        | 191 | 83   | 88     | 150                    | 78   | 350  | 283    | 85   | 115  | 48     | 110 | 128 | 820  |      |

Regular mark(常规标记) : Alloy steel(合金钢) : **ALLOY WLL5.4T CE SLR**

## OPENING EYE HOOK 眼型大开口钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnatlux crack detection
- ◇ 100% 进行磁粉探伤



### SLR625-OPENING EYE HOOK

#### 眼型大开口钩

**SLR625**

| ITEM NO.   | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | A±2 | R±2  | M±2 | Ø±3 | L±3   |
|------------|----------------|------------|------------|-----|------|-----|-----|-------|
| SLR-625-3T | 5              | 3          | 12         | 75  | 45.5 | 209 | 26  | 306.5 |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

● Regular mark (常规标记) : 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)



## G80 EYE SHORTENING GRAB HOOK 80级 眼型翅钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



SLR926-G80 EYE SHORTENING GRAB HOOK

眼型翅钩

SLR926

| ITEM NO.<br>货号 | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A      | B      | C      | E      | M      | Ø      | L      |
|----------------|----------------|------------|------------|--------|--------|--------|--------|--------|--------|--------|
| 6-8            | 0.23           | 1.12       | 4.48       | 8±1    | 8±0.5  | 25.6±1 | 8.3±1  | 50±2   | 13.5±1 | 80.3±2 |
| 7/8-8          | 0.5            | 2          | 8          | 9.5±1  | 11±0.5 | 34±1.5 | 10.5±1 | 62.5±2 | 17.5±1 | 104±2  |
| 13-8           | 2.15           | 5.3        | 21.2       | 18.5±2 | 17±1   | 56±2   | 15.5±2 | 101±3  | 26±2   | 171±3  |


Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。

Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力。

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR + BATCH NUMBER (批号)

## CLEVIS GRAB HOOK WITH CRADLE 羊角翅钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤



SLR937-CLEVIS GRAB HOOK WITH CRADLE

羊角翅钩

SLR937

| ITEM NO. | WEIGHT<br>(kg) | WLL<br>(T) | BF<br>(T) | A       | B    | C    | D    | E        | M      | L     |
|----------|----------------|------------|-----------|---------|------|------|------|----------|--------|-------|
| 6-8      | 0.25           | 1.12       | 4.48      | 8±0.5   | 32±1 | 9±1  | 18±1 | 8.3±1    | 50±2   | 81±2  |
| 7/8-8    | 0.58           | 2          | 8         | 9.5±0.5 | 38±1 | 11±1 | 24±1 | 10.5±1   | 62.5±2 | 105±3 |
| 13-8     | 2.4            | 5.3        | 21.2      | 15±0.8  | 60±2 | 16±1 | 37±2 | 15.5±1.5 | 101±3  | 173±4 |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。


Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力。

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR+BATCH NUMBER



## LONG LARGE OPENING HOOK 长型大开口钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤



**SLR946-LONG LARGE OPENING HOOK**  
长型大开口钩

**SLR946**


| ITEM NO.    | WEIGHT (kg) | WLL (T) | BF (T) | A      | E      | G    | H    | Ø    | Ø'   | L     | L'      |
|-------------|-------------|---------|--------|--------|--------|------|------|------|------|-------|---------|
| <b>2.5T</b> | 1.57        | 2.5     | 10     | 16.8±1 | 74.5±2 | 27±1 | 20±1 | 55±1 | 24±1 | 302±3 | 256.5±3 |
|             |             |         |        |        |        |      |      |      |      |       |         |
|             |             |         |        |        |        |      |      |      |      |       |         |

Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。  
Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力。

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR+BATCH NUMBER

## SAFETY HOOK 安全钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤



**SLR944-SAFETY HOOK**  
安全钩

**SLR944**

| ITEM NO.  | WEIGHT (kg) | WLL (T) | BF (T) | A     | L     | L'    | Ø      | E     |
|-----------|-------------|---------|--------|-------|-------|-------|--------|-------|
| <b>2T</b> | 3.455       | 2       | 10     | 181±3 | 335±4 | 289±3 | 32.5±1 | 108±3 |
| <b>3T</b> | 3.455       | 3       | 15     | 181±3 | 335±4 | 289±3 | 32.5±1 | 108±3 |
|           |             |         |        |       |       |       |        |       |
|           |             |         |        |       |       |       |        |       |


Ultimate load is 4 times the Working Load Limit. 破断拉力是工作拉力的4倍。  
Above Working Load Limit is based on side pull 表格所列工作拉力是在侧拉情况下的工作拉力。

- Regular mark (常规标记): 10-8 WLL3.15T CE SLR+BATCH NUMBER



## EYE HOOK 锻造眼钩

- ◆ Available in carbon steel and alloy steel
- ◇ 可以提供优质碳钢和合金钢两种材质
- ◆ Forged - Quenched and Tempered
- ◇ 锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnatlux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理)
- ◇ Powder plastified (喷塑)
- ◆ Colour code(色号)
- ◇ Red (红色) RAL3020/Yellow (黄色) RAL1003



### SLR130-EYE HOOK

眼型货钩

SLR130

| ITEM NO.             | WEIGHT<br>(kg) | ALLOY<br>合金钢 |            | CARBON<br>碳钢 |            | D ±1 | E ±2 | H ±1.5 | K ±2.5 | L ±3  | M ±1.5 |
|----------------------|----------------|--------------|------------|--------------|------------|------|------|--------|--------|-------|--------|
|                      |                | WLL<br>(T)   | B.L<br>(T) | WLL<br>(T)   | B.L<br>(T) |      |      |        |        |       |        |
| SLR-130-A0.75T/C0.5T | 0.21           | 0.75         | 3.75       | 0.5          | 2.5        | 16.5 | 18   | 17     | 72     | 97    | 16     |
| SLR-130-A1T/C0.75T   | 0.27           | 1            | 5          | 0.75         | 3.75       | 19   | 22   | 20.5   | 82     | 112   | 16     |
| SLR-130-A1.5T/C1T    | 0.4            | 1.5          | 7.5        | 1            | 5          | 23   | 24.5 | 21.5   | 94     | 126   | 17.5   |
| SLR-130-A2T/C1.5T    | 0.6            | 2            | 10         | 1.5          | 7.5        | 28   | 25   | 26     | 104.5  | 142   | 21     |
| SLR-130-A3T/C2T      | 0.84           | 3            | 15         | 2            | 10         | 31   | 27   | 28     | 120    | 163   | 23     |
| SLR-130-A5T/C3T      | 1.81           | 5            | 25         | 3            | 15         | 39   | 35.5 | 40     | 146    | 203   | 33     |
| SLR-130-A7T/C5T      | 3.35           | 7            | 35         | 5            | 25         | 51   | 44   | 45     | 187.5  | 255   | 38     |
| SLR-130-A11T/C7.5T   | 6.1            | 11           | 55         | 7.5          | 37.5       | 62   | 55   | 57     | 231.5  | 317   | 46     |
| SLR-130-A15T/C10T    | 9.6            | 15           | 75         | 10           | 50         | 73   | 57   | 66     | 262    | 360   | 55     |
| SLR-130-A22T/C15T    | 16             | 22           | 110        | 15           | 75         | 89   | 83   | 79.6   | 318    | 433   | 68.5   |
| SLR-130-A30T/C20T    | 25.8           | 30           | 150        | 20           | 100        | 90   | 95   | 91     | 360    | 495.5 | 70     |


Ultimate load is 5 times the Working Load Limit. 破断拉力是工作拉力的5倍。

Regular mark (常规标记): 碳钢: SWL1T CE SLR + BATCH NUMBER (批号);  
合金钢: ALLOY WLL1T CE SLR + BATCH NUMBER (批号)。



## NEW TYPE EYE HOOK 眼型货钩

- ◆ Forged - Quenched and Tempered
- ◇ 锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Red (红色) RAL3020 / Yellow (黄色) RAL1003



NEW! 改进型



**SLR156 - NEW TYPE ALLOY STEEL EYE HOIST HOOK**  
新型合金钢眼型吊钩

**SLR156**

| ITEM NO.      | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | E          | Ø        | Ø1       | Ø2        | L       | K         | M          |
|---------------|----------------|------------|------------|------------|----------|----------|-----------|---------|-----------|------------|
| SLR-156-0.75T | 0.21           | 0.75       | 3.75       | 18 ± 1     | 17 ± 1   | 16.5 ± 1 | 32.5 ± 1  | 97 ± 2  | 72 ± 2    | 16 ± 1     |
| SLR-156-1T    | 0.28           | 1          | 5          | 22.5 ± 1   | 19 ± 1   | 19 ± 1   | 37.6 ± 1  | 112 ± 2 | 82 ± 2    | 16 ± 1     |
| SLR-156-1.5T  | 0.4            | 1.5        | 7.5        | 24.5 ± 1   | 24 ± 1   | 23 ± 1.5 | 44 ± 2    | 126 ± 2 | 94 ± 2    | 17.5 ± 1   |
| SLR-156-2T    | 0.65           | 2          | 10         | 25.5 ± 1   | 24 ± 1   | 28 ± 1.5 | 51 ± 2    | 142 ± 2 | 105 ± 2   | 21 ± 1     |
| SLR-156-3T    | 1.24           | 3          | 15         | 27 ± 1.5   | 25 ± 1.5 | 31 ± 1.5 | 61 ± 2    | 163 ± 3 | 120 ± 3   | 23 ± 1     |
| SLR-156-5T    | 1.75           | 5          | 25         | 35.5 ± 1.5 | 30 ± 1.5 | 39 ± 1.5 | 74 ± 2    | 203 ± 3 | 146 ± 3   | 33 ± 2     |
| SLR-156-7T    | 3.77           | 7          | 35         | 43 ± 2     | 42 ± 2   | 51 ± 2   | 97 ± 2.5  | 255 ± 3 | 186.5 ± 3 | 38 ± 2     |
| SLR-156-11T   | 6.1            | 11         | 55         | 55 ± 2     | 48 ± 2   | 62 ± 2   | 119 ± 2.5 | 317 ± 3 | 231.5 ± 3 | 46 ± 2     |
| SLR-156-15T   | 10.6           | 15         | 75         | 59 ± 2     | 57 ± 2   | 73 ± 2   | 137 ± 2.5 | 360 ± 4 | 257 ± 4   | 55 ± 2     |
| SLR-156-22T   | 15.33          | 22         | 110        | 75 ± 2     | 61 ± 2   | 89 ± 2.5 | 168 ± 3   | 434 ± 4 | 318 ± 4   | 68.5 ± 2.5 |
| SLR-156-30T   | 25.5           | 30         | 150        | 95 ± 3     | 83 ± 3   | 90 ± 2.5 | 178 ± 3   | 496 ± 4 | 360 ± 4   | 76 ± 2.5   |


Ultimate load is 5 times the Working Load Limit, 破断拉力是工作拉力的5倍。

Regular mark(常规标记): ALLOY WLL1T CE SLR +BATCH NUMBER (批号)。



## EYE HOOK 眼型货钩

- ◆ Large throat opening and small cross area
- ◇ 大开口，小截面，更方便连接和穿入。
- ◆ Forged alloy steel, High strength and good ductility
- ◇ 优质合金钢锻造而成，高强度，韧性好。
- ◆ Only for general hoist, Not for overhead lifting
- ◇ 仅用于一般起吊，不能用于头上起重作业



### SLR0113-EYE HOOK

眼型货钩


SLR113

| ITEM NO.   | WEIGHT (KG) | WLL (T) | B.L (T) | Ø±0.5 | B±1  | L±3 | R±2   | E±1.5 | H±1  |
|------------|-------------|---------|---------|-------|------|-----|-------|-------|------|
| SLR-113-2T | 0.65        | 2       | 4       | 24    | 26.5 | 149 | 84    | 47    | 24   |
| SLR-113-3T | 1.25        | 3       | 6       | 30.5  | 35.5 | 179 | 97.5  | 49    | 29.5 |
| SLR-113-5T | 1.45        | 5       | 10      | 33.5  | 33.5 | 198 | 107   | 54    | 33.5 |
| SLR-113-6T | 2.75        | 6       | 12      | 37.5  | 48.5 | 234 | 118.5 | 61    | 41.8 |
| SLR-113-8T | 3.28        | 8       | 16      | 43    | 52   | 253 | 129.5 | 69.5  | 47   |

Ultimate load is 2 times the Working Load Limit 破断拉力是工作拉力的2倍

Regular mark (常规标记): WLL2T CE SLR

- ◆ Large throat opening and small cross area
- ◇ 大开口，小截面，更方便连接和穿入
- ◆ Forged alloy steel, High strength and good ductility
- ◇ 优质合金钢锻造而成，高强度，韧性好
- ◆ Only for general hoist, Not for overhead lifting
- ◇ 仅用于一般起吊，不能用于头上起重作业。



### SLR118-ALLOY EYE HOOK

合金钢无舌眼型大开口钩

SLR118

| TIEM CODE<br>货号 | WEIGHT<br>(Kg) | WLL<br>(T) | B.L<br>(T) | D±1 | L±3 | B±2 | R±2  | E±2 | H±2 |
|-----------------|----------------|------------|------------|-----|-----|-----|------|-----|-----|
| SLR118-2T       | 0.36           | 2          | 4          | 20  | 126 | 82  | 96.5 | 44  | 20  |
|                 |                |            |            |     |     |     |      |     |     |
|                 |                |            |            |     |     |     |      |     |     |
|                 |                |            |            |     |     |     |      |     |     |


Ultimate load is 2 times the Working Load Limit 破断拉力是工作拉力的2倍

Regular mark (常规标记以SLR118-2T为例): SWL5000LBS CE SLR+BATCH NUMBER(批号)



## FORGED EYE HOOK 锻造眼型钩

- ◆ Large throat opening and small cross area
- ◇ 大开口，小截面，更方便连接和穿入
- ◆ Forged alloy steel, High strength and good ductility
- ◇ 优质合金钢锻造而成，高强度，韧性好
- ◆ Only for general hoist, Not for overhead lifting
- ◇ 仅用于一般起吊，不能用于头上起重作业。



**SLR536-EYE SLING HOOK**


眼型滑钩

**SLR536**

| TIEM CODE<br>货号  | WEIGHT<br>(Kg) | WLL<br>(T) | B.L<br>(T) | D ±1 | L ±3 | B ±2 | R ±2 | E ±2 | H ±2 |
|------------------|----------------|------------|------------|------|------|------|------|------|------|
| <b>SLR536-6T</b> | 2.8            | 6          | 18         | 38   | 232  | 23   | 166  | 60   | 42   |
|                  |                |            |            |      |      |      |      |      |      |
|                  |                |            |            |      |      |      |      |      |      |
|                  |                |            |            |      |      |      |      |      |      |

Regular mark (常规标记以SLR536-6T为例): 6000L WLL6T CE SLR+BATCH NUMBER(批号)

- ◆ Forged alloy steel or carbon steel.
- ◇ 合金钢或碳钢锻造而成
- ◆ Forged - Quenched and Tempered
- ◇ 锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Red(红色)RAL3020/Yellow (黄色) RAL1003



**SLR618-EYE HOOK**

眼型货钩

**SLR618**

| ITEM NO.                  | WEIGHT<br>(kg) | ALLOY      |            | CARBON     |            | D ±1 | E ±2 | H ±1.5 | K ±2.5 | L ±3  | M ±1.5 |
|---------------------------|----------------|------------|------------|------------|------------|------|------|--------|--------|-------|--------|
|                           |                | WLL<br>(T) | B.L<br>(T) | WLL<br>(T) | B.L<br>(T) |      |      |        |        |       |        |
| <b>SLR-618-A1T/C0.75T</b> | 0.31           | 1          | 5          | 0.75       | 3.75       | 19   | 23   | 22     | 79.5   | 111   | 16     |
| <b>SLR-618-A1.5T/C1T</b>  | 0.51           | 1.5        | 7.5        | 1          | 5          | 22   | 23   | 24     | 94     | 129   | 18     |
| <b>SLR-618-A2T/C1.5T</b>  | 0.69           | 2          | 10         | 1.5        | 7.5        | 29   | 26.5 | 27     | 103.5  | 143   | 22     |
| <b>SLR-618-A3T/C2T</b>    | 1.08           | 3          | 15         | 2          | 10         | 32   | 29.5 | 32     | 118.5  | 167   | 24     |
| <b>SLR-618-A5T/C3T</b>    | 1.88           | 5          | 25         | 3          | 15         | 40   | 35   | 37     | 149    | 205   | 33.5   |
| <b>SLR-618-A7T/C5T</b>    | 3.72           | 7          | 35         | 5          | 25         | 51   | 43   | 46     | 186.5  | 256.5 | 42     |
| <b>SLR-618-A11T/C7.5T</b> | 6.78           | 11         | 55         | 7.5        | 37.5       | 62   | 56   | 58     | 229    | 316   | 49     |
| <b>SLR-618-A15T/C10T</b>  | 11.2           | 15         | 75         | 10         | 50         | 73   | 58   | 68     | 265    | 315   | 56     |

Ultimate load is 5 times the Working Load Limit. 破断拉力是工作拉力的5倍。

Regular mark(常规标记): Alloy steel(合金钢): 碳钢: SWL1T CE SLR +BATCH NUMBER (批号);

合金钢: ALLOY WLL1T CE SLR +BATCH NUMBER (批号)。






## EYE SLING HOOK

### 单眼货钩

- ◆ Forged alloy steel or carbon steel-Quenched and Tempered
- ◇ 合金钢或碳钢锻造，严格的热处理保证了强度和韧性
- ◆ 100% magnaflix crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理):
- ◇ Powder plastified(喷塑)
- ◆ Colour code(色号):
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003



#### SLR504-EYE SLING HOOK

##### 单眼货钩

**SLR504**

| ITEM NO.       | WEIGHT<br>(KG) | WLL (T)     |             | M±2  | Ø±2 | E±2  | D±3  | L±3   |
|----------------|----------------|-------------|-------------|------|-----|------|------|-------|
|                |                | CARON (5:1) | ALLOY (4:1) |      |     |      |      |       |
| <b>SLR-504</b> | 0.3            | 0.8         | 1.25        | 73.4 | 19  | 25   | 9.5  | 111.5 |
| <b>SLR-504</b> | 0.38           | 1           | 1.6         | 82   | 23  | 27   | 11.5 | 129   |
| <b>SLR-504</b> | 0.58           | 1.6         | 2.5         | 92   | 29  | 30   | 12   | 145   |
| <b>SLR-504</b> | 0.9            | 2           | 3.2         | 104  | 32  | 33   | 15   | 164   |
| <b>SLR-504</b> | 1.6            | 3.2         | 5.4         | 122  | 40  | 37   | 18   | 201   |
| <b>SLR-504</b> | 3.33           | 5           | 8           | 158  | 51  | 49.5 | 23.5 | 258.3 |

## ITALIAN TYPE EYE SLING HOOK

### 意式单眼货钩

- ◆ Forged alloy steel or carbon steel-Quenched and Tempered
- ◇ 合金钢或碳钢锻造，严格的热处理保证了强度和韧性
- ◆ 100% magnaflix crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理):
- ◇ Powder plastified(喷塑)
- ◆ Colour code(色号):
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003



#### SLR505-ITALIAN TYPE EYE SLING HOOK

##### 意式单眼货钩


**SLR505**

| ITEM NO.       | WEIGHT<br>(KG) | WLL<br>(T)     |                | M±2 | Ø±2 | E±2 | D±3 | H±3 | L±3 |
|----------------|----------------|----------------|----------------|-----|-----|-----|-----|-----|-----|
|                |                | CARON<br>(5:1) | ALLOY<br>(4:1) |     |     |     |     |     |     |
| <b>SLR-505</b> | 0.9            | 2              | 3.2            | 104 | 32  | 33  | 15  | 30  | 164 |



## SPECIAL EYE HOIST HOOK 异型眼型货钩

- ◆ Forged super alloy steel-Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理) :
- ◇ Powder plastified(喷塑)
- ◆ Colour code(色号) :
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003




**SLR291-SPECIAL EYE HOIST HOOK**  
异型眼型货钩

**SLR291**

| ITEM NO.            | WEIGHT (KG) | CARBON (5:1) | ALLOY (4:1) | Ø±2 | B±2 | E±2  | D±3  | L±3 |
|---------------------|-------------|--------------|-------------|-----|-----|------|------|-----|
| <b>SLR-291-0.8T</b> | 0.29        | 0.8          | 1.25        | 19  | 76  | 25   | 9.5  | 109 |
| <b>SLR-291-1.0T</b> | 0.39        | 1            | 1.6         | 23  | 81  | 28   | 11.5 | 126 |
| <b>SLR-291-1.6T</b> | 0.62        | 1.6          | 2.5         | 28  | 93  | 30   | 13   | 144 |
| <b>SLR-291-2.0T</b> | 0.91        | 2            | 3.2         | 32  | 105 | 33.2 | 15   | 163 |

## ITALIAN TYPE EYE SLING HOOK WITH FLAT 意式带扁单眼货钩

- ◆ Forged super carbon steel- Quenched and Tempered
- ◇ 高强度高韧性特殊钢锻造而成，经过热处理
- ◆ 100% magnaflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理) :
- ◇ Powder plastified(喷塑)
- ◆ Colour code(色号) :
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003



**SLR366-ITALIAN TYPE EYE SLING HOOK WITH FLAT**  
意式带扁单眼货钩

**SLR366**


| ITEM NO.            | WEIGHT (KG) | WLL (T) (4:1) |       | D±2   | Ø±2  | H±2  | E±3  | L±3   |
|---------------------|-------------|---------------|-------|-------|------|------|------|-------|
|                     |             | CARBON        | ALLOY |       |      |      |      |       |
| <b>SLR-366-0.8T</b> | 0.28        | 0.8           | 1.25  | 9.5   | 19   | 21   | 25   | 113   |
| <b>SLR-366-1.0T</b> | 0.34        | 1             | 1.6   | 11    | 23   | 23   | 25.8 | 127   |
| <b>SLR-366-1.6T</b> | 0.51        | 1.6           | 2.5   | 11.75 | 28.5 | 25.5 | 28   | 144.5 |
| <b>SLR-366-2T</b>   | 0.865       | 2             | 3.2   | 15    | 32   | 30   | 31   | 168   |
| <b>SLR-366-5T</b>   | 0.34        | 5             | 8     | 25    | 51   | 50.3 | 48.4 | 265.5 |
| <b>SLR-366-7.5T</b> | 0.51        | 7.5           | 11    | 29    | 62   | 63   | 59   | 323   |



## EYE HOIST HOOK

### 眼型货钩

- ◆ Forged alloy steel or carbon steel-Quenched and Tempered
- ◇ 合金钢或碳钢锻造，严格的热处理保证了强度和韧性
- ◆ 100% magnaflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理) :
- ◇ Powder plastified(喷塑)
- ◆ Colour code(色号) :
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003



#### SLR629-EYE HOIST HOOK

**SLR629**


##### 眼型货钩

| ITEM NO. | WEIGHT<br>(KG) | WLL (T)        |                | $\varnothing \pm 2$ | E $\pm 2$ | H $\pm 3$ | M $\pm 3$ | L $\pm 3$ |
|----------|----------------|----------------|----------------|---------------------|-----------|-----------|-----------|-----------|
|          |                | CARON<br>(5:1) | ALLOY<br>(5:1) |                     |           |           |           |           |
| SLR-629  | 0.15           | 0.5            | 0.75           | 16.5                | 21        | 65        | 62        | 102       |
| SLR-629  | 0.3            | 0.75           | 1              | 17                  | 26        | 80.5      | 70        | 114       |
| SLR-629  | 0.4            | 1              | 1.6            | 22                  | 26        | 93.5      | 77.9      | 127       |
| SLR-629  | 0.58           | 1.5            | 2              | 28.5                | 29        | 101.5     | 87        | 141       |
| SLR-629  | 0.91           | 2              | 3.2            | 30                  | 29        | 119.8     | 97        | 166       |
| SLR-629  | 1.8            | 3              | 5              | 39                  | 39        | 162.5     | 122       | 211       |
| SLR-629  | 3.1            | 5              | 7.5            | 49                  | 46.7      | 185       | 150       | 257       |
| SLR-629  | 6.6            | 7.5            | 11             | 60                  | 61.5      | 231       | 190       | 319       |

## ITALIAN TYPE EYE SLING HOOK CARBON STEEL

### 意式碳钢单眼滑钩

- ◆ Forged carbon steel-Quenched and Tempered
- ◇ 合金钢锻造，严格的热处理保证了强度和韧性
- ◆ 100% magnaflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理) :
- ◇ Powder plastified(喷塑)
- ◆ Colour code(色号) :
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003



#### SLR097-ITALIAN TYPE EYE SLING HOOK CARBON STEEL

**SLR097**

##### 意式碳钢单眼滑钩

| ITEM NO.  | WEIGHT<br>(KG) | WLL<br>(T) | B.L<br>(T) | D $\pm 2$ | $\varnothing \pm 2$ | E $\pm 2$ | H $\pm 3$ | L $\pm 3$ |
|-----------|----------------|------------|------------|-----------|---------------------|-----------|-----------|-----------|
| SLR-97-3T | 1.1            | 3          | 12         | 18        | 40                  | 40        | 40        | 203       |
| SLR-97-5T | 2.65           | 5          | 20         | 23.5      | 51.5                | 50        | 48        | 259.5     |



## LARGE OPENING HOOKS 高强度细筋大开口钩

- ◆ Large throat opening and small cross area
- ◇ 大开口, 小截面, 更方便连接和穿入
- ◆ Forged alloy steel, High strength and good ductility
- ◇ 优质合金钢锻造而成, 高强度, 韧性好
- ◆ Only for general hoist, Not for overhead lifting
- ◇ 仅用于一般起吊, 不能用于头上起重作业。



### SLR114-ALLOY EYE HOOK WITH LATCH

合金钢含舌眼型大开口钩

SLR114

| TIEM CODE<br>货号 | WEIGHT<br>(Kg) | WLL<br>(T) | B.L<br>(T) | D ±1 | L ±3 | B ±2 | R ±2 | E ±2 | H ±2 |
|-----------------|----------------|------------|------------|------|------|------|------|------|------|
| SLR114-1.5T     | 0.22           | 1.5        | 4.5        | 17   | 99.5 | 71.5 | 79   | 23   | 13   |
|                 |                |            |            |      |      |      |      |      |      |
|                 |                |            |            |      |      |      |      |      |      |
|                 |                |            |            |      |      |      |      |      |      |

Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的3倍

Regular mark (常规标记以SLR114-1.5T为斜): SWL1.5T CE SLR+BATCH NUMBER(批号)

## EYE SLIP HOOK 眼型滑钩

- ◆ Forged super carbon/alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊碳钢/合金钢锻造而成, 经过热处理
- ◆ Not for lifting, only for lashing or pulling
- ◇ 不能用于起重, 仅用于捆绑和拖拉
- ◆ 100% magnaflux crack detection ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理): ◇ Powder plastified(喷塑)
- ◆ Colour code(色号):
- ◇ Red(红色) RAL3020 /Yellow(黄色) RAL1003



### SLR128-EYE SLIP HOOK

眼型滑钩

SLR128

| ITEM NO.     | WEIGHT<br>(LBS) | WLL (lbs) (4:1) |       | A ±2  | Ø ±2 | R ±2  | E ±2 | L ±3  | M ±3 | M ±3 |
|--------------|-----------------|-----------------|-------|-------|------|-------|------|-------|------|------|
|              |                 | CARBON          | ALLOY |       |      |       |      |       |      |      |
| SLR-128-1/4  | 0.22            | 1950            | 2750  | 8.5   | 13   | 65.5  | 18.5 | 93    | 72   | 14.5 |
| SLR-128-5/16 | 0.3             | 2875            | 4300  | 9     | 16   | 74    | 24.5 | 107   | 77   | 15   |
| SLR-128-3/8  | 0.67            | 4000            | 5250  | 10.25 | 18   | 86.5  | 27   | 123.8 | 88   | 19   |
| SLR-128-7/16 | 0.71            | 5000            | 7000  | 12.7  | 20.6 | 98.8  | 32   | 142.5 | 107  | 21   |
| SLR-128-1/2  | 0.95            | 6500            | 9000  | 14.5  | 23   | 109.5 | 34   | 156   | 114  | 23   |
| SLR-128-3/4  | 2.62            | 12500           | 19250 | 18.3  | 36.8 | 148   | 50.9 | 222   | 168  | 34   |

● Regular mark(常规标记): G70: G70 1/4 FORGED G43: G43 HIGH TEST FORGED 1/4



## COMMERCIAL HOOKS

### 普通拖钩和绑钩系列

◆Forged super alloy steel –Quenched and Tempered.

◇合金钢锻造而成，经过热处理。

◆Not for lifting,only for lashing or pulling.

◇不能用于起重，仅用于捆绑或拖拉。

◆Breakage test

◇对每一批次产品进行严格的抽样破坏测试

◆100% magnaflux crack detection

◇100% 进行磁粉探伤



#### SLR062-ALLOY TRIANGLE RING HOOK

##### 三角环吊钩


SLR062

| ITEM NO.    | WEIGHT<br>(KG) | WLL<br>(daN) | B.L<br>(T) | A±4 | D±1 | H±2 | K±2   | L±3 | N±1 |
|-------------|----------------|--------------|------------|-----|-----|-----|-------|-----|-----|
| SLR-062-5T  | 0.55           | 2500         | 5          | 56  | 12  | 26  | 119   | 173 | 26  |
| SLR-062-10T | 1.51           | 5000         | 10         | 78  | 16  | 33  | 167.5 | 238 | 46  |



## COMMERCIAL HOOKS 普通拖钩和绑钩系列

- ◆ Forged carbon steel-Quenched and tempered
- ◇ 优质碳钢锻造，经过热处理
- ◆ Surface finish: Galvanized
- ◇ 表面处理：电镀白锌
- ◆ Only for lashing or pulling. Never to be used for lifting
- ◇ 仅用于捆绑或则拖拉，绝不能用于起重




### SLR050-TOW HOOK 锻造保险钩

**SLR050**

| TIEM CODE<br>货号 | WEIGHT<br>(KG) | B.L<br>(T) | D±1 | N±2  | E±1 | B±2 | L1±3 | L2±3 |
|-----------------|----------------|------------|-----|------|-----|-----|------|------|
| SLR050-6mm      | 0.15           | 2.3        | 7   | 13   | 17  | 53  | 80   | 59   |
| SLR050-8mm      | 0.23           | 3.8        | 8   | 17   | 21  | 69  | 107  | 78   |
| SLR050-9mm      | 0.26           | 3.8        | 9   | 19.4 | 22  | 70  | 109  | 79   |

Regular mark (常规标记以SLR050-6mm为例) : 6mm WLL2.3T CE SLR+BATCH NUMBER(批号)

- ◆ Forged carbon steel-Quenched and tempered
- ◇ 优质碳钢锻造，经过热处理
- ◆ Surface finish: Galvanized
- ◇ 表面处理：电镀白锌
- ◆ Only for lashing or pulling. Never to be used for lifting
- ◇ 仅用于捆绑或则拖拉，绝不能用于起重



### SLR233-TOW HOOK 锻造保险钩

**SLR233**


| TIEM CODE<br>货号 | WEIGHT<br>(Kg) | B.L<br>(T) | D±1 | N±2 | E±2  | B±2  | L1±3  | L2±3 |
|-----------------|----------------|------------|-----|-----|------|------|-------|------|
| SLR233-1/4      | 0.18           | 2.3        | 8.5 | 15  | 20   | 62.5 | 97.6  | 67   |
| SLR233-5/16     | 0.26           | 3.8        | 8.5 | 19  | 23.5 | 75   | 113.3 | 80   |

Regular mark (常规标记以SLR233-5/16为例) : 5/16 CE SLR+BATCH NUMBER(批号)



## EYE SLING HOOK 单眼货钩

- ◆ Forged alloy steel or carbon steel-Quenched and Tempered
- ◇ 合金钢或碳钢锻造，严格的热处理保证了强度和韧性
- ◆ 100% magnafux crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理): ◇ Powder plastified(喷塑)
- ◆ Colour code(色号):
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003




### SLR223-EYE SLING HOOK 单眼货钩

**SLR223**

| ITEM NO.     | WEIGHT<br>(KG) | WLL(T) |       | E ±2 | Ø ±2 | D ±2 | H ±3 | B ±3 | M ±3 | N ±3 | L ±3  |
|--------------|----------------|--------|-------|------|------|------|------|------|------|------|-------|
|              |                | CARBON | ALLOY |      |      |      |      |      |      |      |       |
| SLR-223-0.8T | 0.25           | 0.8    | 1.25  | 25.4 | 19   | 9.5  | 20   | 40   | 16   | 13   | 111.6 |
| SLR-223-1.0T | 0.4            | 1      | 1.6   | 27   | 23   | 11.5 | 22   | 43   | 16   | 10   | 129   |
| SLR-223-1.6T | 0.5            | 1.6    | 2.5   | 29   | 29   | 12   | 27.5 | 47   | 21   | 14   | 145   |
| SLR-223-2.0T | 0.9            | 2      | 3.2   | 33   | 32   | 15   | 30   | 50   | 24   | 15   | 164   |
| SLR-223-3.0T | 1.55           | 3.2    | 5.4   | 41   | 40   | 18   | 40.7 | 62   | 30   | 20   | 201   |
| SLR-223-5.0T | 3.35           | 5      | 8     | 49.5 | 51   | 23.5 | 48   | 80   | 38   | 24   | 258.5 |

## EYE HOOK WITH LAING 眼型钩

- ◆ Forged carbon steel-Quenched and Tempered
- ◇ 碳钢锻造，严格的热处理保证了强度和韧性
- ◆ 100% magnafux crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理):
- ◇ Powder plastified(喷塑)
- ◆ Colour code(色号):
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003



### SLR225-EYE HOOK WITH LAING 眼型钩


**SLR225**

| ITEM NO.       | WEIGHT<br>(KG) | WLL<br>(T) | B.L | E ±2 | Ø ±2 | B ±2 | H ±3 | D ±3 | R ±3 | L ±3  |
|----------------|----------------|------------|-----|------|------|------|------|------|------|-------|
| 8-SLR-225-1.5T | 0.58           | 1.5        | 6   | 28   | 27   | 93   | 26.5 | 13.5 | 104  | 142.4 |



## LARGE OPENING HOOKS 高强度细筋大开口钩

- ◆ Large throat opening and small cross area
- ◇ 大开口，小截面，更方便连接和穿入
- ◆ Forged alloy steel, High strength and good ductility
- ◇ 优质合金钢锻造而成，高强度，韧性好
- ◆ Only for general hoist, Not for overhead lifting
- ◇ 仅用于一般起吊，**不能用于头上起重作业。**



SLR502-EYE HOOK

眼型钩

SLR502

| TIEM CODE<br>货号 | WEIGHT<br>(Kg) | WLL<br>(T) | BL<br>(T) | D±1 | L±3 | B±2 | R±2 | E±2 | H±2 |
|-----------------|----------------|------------|-----------|-----|-----|-----|-----|-----|-----|
| SLR502-3.2T     | 0.66           | 3.2T       | 3.2T      | 21  | 164 | 108 | 130 | 51  | 24  |

## LARGE OPENING HOOKS 高强度细筋大开口钩

- ◆ Large throat opening and small cross area
- ◇ 大开口，小截面，更方便连接和穿入
- ◆ Forged alloy steel, High strength and good ductility
- ◇ 优质合金钢锻造而成，高强度，韧性好
- ◆ Only for general hoist, Not for overhead lifting
- ◇ 仅用于一般起吊，**不能用于头上起重作业。**



SLR117-ALLOY EYE HOOK WITH LATCH

合金钢含舌眼型大开口钩

SLR117

| TIEM CODE      | WEIGHT<br>(Kg) | WLL<br>(T) | B.L<br>(T) | D±1  | L±3 | B±2  | C±2 | R±2  | E±2 | H±2  |
|----------------|----------------|------------|------------|------|-----|------|-----|------|-----|------|
| SLR117-6800LBS | 0.45           | 3          | 6          | 20.5 | 127 | 87.5 | 21  | 95.7 | 27  | 18.3 |

Ultimate load is 2 times the Working Load Limit 破断拉力是工作拉力的2倍


Regular mark (常规标记以SLR117-6800LBS为例) : SWL6800LBS CE SLR+BATCH NUMBER(批号)





## MILD STEEL HOOKS 普通低碳钢货钩

- ◆ Forged mild steel
- ◆ 普通低碳钢锻造
- ◆ Surface finish: Galvanized
- ◆ 表面处理: 电镀锌
- ◆ Only for lashing or pulling. Never to be used for lifting
- ◆ 仅用于捆绑或则拖拉, 绝不能用于起重



### SLR020-DING689 HOOK WITH LTACH

德标DIN689货钩


**SLR020**

| ITEM NO.       | WEIGHT (kg) | SWL (KG) | Ø ± 0.5 | B ± 1 | C ± 1.2 | D ± 0.5 | E ± 2 |
|----------------|-------------|----------|---------|-------|---------|---------|-------|
| SLR-020-250KG  | 0.15        | 250      | 12      | 54    | 18      | 7.25    | 88.1  |
| SLR-020-500KG  | 0.32        | 500      | 16      | 70    | 23      | 10      | 117   |
| SLR-020-1000KG | 0.84        | 1000     | 20      | 98    | 34      | 13      | 160   |
| SLR-020-1600KG | 1.3         | 1600     | 22      | 111   | 37      | 16      | 186   |
| SLR-020-2500KG | 2.55        | 2500     | 25      | 145   | 48      | 20      | 233   |

Regular mark (常规标记): SWL250KG CE

## EYE SLIP HOOK 眼型滑钩

- ◆ Forged super carbon/alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊碳钢/合金钢锻造而成, 经过热处理
- ◆ Not for lifting, only for lashing or pulling
- ◆ 不能用于起重, 仅用于捆绑和拖拉
- ◆ 100% magnaflux crack detection
- ◆ 100%进行磁粉探伤
- ◆ Surface finish (表面处理): ◇ Powder plastified (喷塑)
- ◆ Colour code(色号): ◇ Red(红色) RAL3020
- ◆ Yellow(黄色) RAL1003



### SLR126-EYE SLIP HOOK

眼型滑钩

**SLR126**

| ITEM NO.     | WEIGHT (LBS) | WLL/lbs (4:1) |       | Ø ± 2 | R ± 2 | L ± 3 | M ± 3 | E ± 2 |
|--------------|--------------|---------------|-------|-------|-------|-------|-------|-------|
|              |              | CARBON        | ALLOY |       |       |       |       |       |
| SLR-126-1/4  | 0.4          | 1950          | 2750  | 12.7  | 65    | 92    | 68.5  | 23    |
| SLR-126-5/16 | 0.62         | 2875          | 4300  | 16    | 72.5  | 106   | 76    | 26    |
| SLR-126-3/8  | 1            | 4000          | 5250  | 18    | 86.5  | 124   | 89.5  | 33    |
| SLR-126-7/16 | 1.56         | 5000          | 7000  | 20.5  | 98.5  | 142   | 108   | 40    |
| SLR-126-1/2  | 2.1          | 6500          | 9000  | 23    | 109.5 | 156   | 116.5 | 43    |
| SLR-126-5/8  | 3.9          | 9250          | 13500 | 28.8  | 132.5 | 195   | 143   | 52    |
| SLR-126-3/4  | 6.93         | 12500         | 19250 | 35    | 147.5 | 222   | 169   | 55    |


● Regular mark(常规标记): G70: G70 1/4 FORGED G43: G43 HIGH TEST FORGED 1/4



## FORGED HOOK

### 锻打钩

- ◆ Large throat opening and small cross area
- ◇ 大开口，小截面，更方便连接和穿入。
- ◆ Forged alloy steel, High strength and good ductility
- ◇ 优质合金钢锻造而成，高强度，韧性好。
- ◆ Only for general hoist, Not for overhead lifting
- ◇ 仅用于一般起吊，不能用于头上起重作业。



#### SLR257-FORGED HOOK

##### 锻打钩

**SLR257**


| TIEM CODE      | WEIGHT (Kg) | WLL (LBS) | D±1  | L±3 | B±2 | R±2 | E±2 | H±2  |
|----------------|-------------|-----------|------|-----|-----|-----|-----|------|
| SLR257-3300LBS | 0.22        | 3300      | 16.5 | 98  | 70  | 77  | 27  | 13.5 |

Regular mark (常规标记以SLR257-3300LBS为例) : 3300LBS CE SLR+BATCH NUMBER(批号)

## EYE HOOK

### 眼型钩

- ◆ Large throat opening and small cross area
- ◇ 大开口，小截面，更方便连接和穿入
- ◆ Forged alloy steel,High strength and good ductility
- ◇ 优质合金钢锻造而成，高强度，韧性好
- ◆ Only for general hoist,Not for overhead lifting
- ◇ 仅用于一般起吊，不能用于头上起重作业。



#### SLR206-EYE HOOK

##### 眼型钩

**SLR206**

| TIEM CODE   | WEIGHT (Kg) | WLL (T) | B.L (T) | D±1  | L±3   | B±2  | R±2 | E±2  | H±2  |
|-------------|-------------|---------|---------|------|-------|------|-----|------|------|
| SLR206-1.5T | 0.22        | 1.5     | 4.5     | 17   | 99.5  | 71.5 | 78  | 29   | 13   |
| SLR206-3T   | 0.38        | 3       | 9       | 20.5 | 125.3 | 87.5 | 93  | 39.5 | 21.5 |


Regular mark (常规标记以SLR206-1.5T为例) : WLL1.5T CE SLR+BATCH NUMBER(批号)



## ALLOY EYE HOOK WITH LATCH

### 合金钢含舌眼型大开口钩

- ◆ Large throat opening and small cross area
- ◇ 大开口, 小截面, 更方便连接和穿入
- ◆ Forged alloy steel, High strength and good ductility
- ◇ 优质合金钢锻造而成, 高强度, 韧性好
- ◆ Only for general hoist, Not for overhead lifting
- ◇ 仅用于一般起吊, 不能用于头上起重作业。



SLR115-3.1T



SLR115-2.2T

#### SLR115-ALLOY EYE HOOK WITH LATCH

#### SLR115

##### 合金钢含舌眼型大开口钩

| TIEM CODE      | WEIGHT<br>(Kg) | WLL<br>(lbs) | B.L<br>(lbs) | D±1 | L±3 | B±2 | C±1  | R±2   | E±2 | H±2  |
|----------------|----------------|--------------|--------------|-----|-----|-----|------|-------|-----|------|
| SLR115-5000LBS | 0.88           | 5000         | 10000        | 23  | 162 | 97  | 16   | 133   | 37  | 20.6 |
| SLR115-7000LBS | 1.43           | 7000         | 14000        | 22  | 168 | 108 | 20.3 | 133.5 | 40  | 24   |


Ultimate load is 2 times the Working Load Limit 破断拉力是工作拉力的2倍

Regular mark (常规标记以SLR115-5000LBS为例): SWL5000LBS CE SLR+BATCH NUMBER(批号)

## TOW HOOK

### 锻造保险钩

- ◆ Forged carbon steel-Quenched and tempered
- ◇ 优质碳钢锻造, 经过热处理
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflex crack detection
- ◇ 100% 进行磁粉探伤



#### SLR379-TOW HOOK

##### 锻造保险钩

#### SLR379

| TIEM CODE   | WEIGHT<br>(Kg) | B.L<br>(T) | D±1 | L±3 | B±2 | N±2 | R±2 | E±2  |
|-------------|----------------|------------|-----|-----|-----|-----|-----|------|
| SLR379-3/16 | 0.14           | 1.5        | 16  | 154 | 104 | 18  | 65  | 41   |
| SLR379-1/4  | 0.2            | 2.3        | 17  | 179 | 115 | 19  | 72  | 34.5 |


Regular mark (常规标记以SLR47-250KG为例): SWL0.25T



## COMMERCIAL HOOKS

### 普通拖钩和绑钩系列

- ◆ Forged carbon steel-Quenched and tempered
- ◇ 优质碳钢锻造，经过热处理
- ◆ Surface finish: Galvanized
- ◇ 表面处理：电镀白锌
- ◆ Only for lashing or pulling. Never to be used for lifting
- ◇ 仅用于捆绑或则拖拉，绝不能用于起重



#### SLR455-TOW HOOK

##### 锻造保险钩


#### SLR455

| ITEM NO.      | WEIGHT<br>(kg) | BF<br>(KN) | Ø ± 1 | B ± 1.2 | D ± 0.8 | H ± 0.8 | E ± 1 | L ± 2 |
|---------------|----------------|------------|-------|---------|---------|---------|-------|-------|
| SLR-455-LATCH | 0.175          | 3.5        | 18    | 46      | 9.5     | 8       | 19    | 91.5  |
| SLR-455-WIRE  | 0.165          | 3.5        | 18    | 46      | 9.5     | 8       | 19    | 91.5  |

## COMMERCIAL HOOKS

### 普通拖钩和绑钩系列

- ◆ Forged carbon steel-Quenched and tempered
- ◇ 优质碳钢锻造，经过热处理
- ◆ Surface finish: Galvanized
- ◇ 表面处理：电镀白锌
- ◆ Only for lashing or pulling. Never to be used for lifting
- ◇ 仅用于捆绑或则拖拉，绝不能用于起重



#### SLR460-TOW HOOK

##### 锻造保险钩

#### SLR460

| ITEM NO.      | WEIGHT<br>(kg) | BF<br>(KN) | Ø  | B  | E  | L   |
|---------------|----------------|------------|----|----|----|-----|
| SLR-460-LATCH | 0.22           | 2.5        | 19 | 62 | 13 | 106 |
| SLR-460-WIRE  | 0.21           | 2.5        | 19 | 62 | 13 | 106 |



## COMMERCIAL HOOKS

### 普通拖钩和绑钩系列


- ◆ Forged carbon steel-Quenched and tempered
- ◇ 优质碳钢锻造，经过热处理
- ◆ Surface finish: Galvanized
- ◇ 表面处理：电镀白锌
- ◆ Only for lashing or pulling. Never to be used for lifting
- ◇ 仅用于捆绑或则拖拉，绝不能用于起重

#### SLR462-TOW HOOK 锻造保险钩

SLR462

| TIEM CODE<br>货号 | WEIGHT<br>(Kg) | B.L<br>(T) | $\Phi \pm 1$ | B $\pm 2$ | E $\pm 2$ | L $\pm 3$ |
|-----------------|----------------|------------|--------------|-----------|-----------|-----------|
| SLR462-3.5T     | 0.21           | 3.5        | 19           | 55        | 17        | 110       |

Regular mark (常规标记以SLR462-3.5T为例): BL3.5T



#### SLR419-TOW HOOK 锻造保险钩

SLR419


| ITEM NO.      | WEIGHT<br>(kg) | BF<br>(KN) | $\Phi$ | B  | E    | D  | L     |
|---------------|----------------|------------|--------|----|------|----|-------|
| SLR-419-XBC55 | 0.19           | 2          | 18.4   | 59 | 17   | 10 | 100.5 |
| SLR-419-XDL90 | 0.38           | 3          | 22     | 77 | 20.5 | 11 | 127   |



#### SLR420-TOW HOOK 锻造保险钩

SLR420


| ITEM NO.      | WEIGHT<br>(kg) | BF<br>(KN) | $\Phi$ | B  | E  | L  |
|---------------|----------------|------------|--------|----|----|----|
| SLR-420-LATCH | 0.16           | 1.5        | 18     | 46 | 11 | 93 |
| SLR-420-WIRE  | 0.145          | 1.5        | 18     | 46 | 15 | 93 |



## COMMERCIAL HOOKS

### 普通拖钩和绑钩系列

- ◆ Forged carbon steel-Quenched and tempered
- ◇ 优质碳钢锻造，经过热处理
- ◆ Surface finish: Galvanized
- ◇ 表面处理：电镀白锌
- ◆ Only for lashing or pulling. Never to be used for lifting
- ◇ 仅用于捆绑或则拖拉，绝不能用于起重



#### SLR423-TOW HOOK

锻造保险钩


SLR423

| ITEM NO.     | WEIGHT (kg) | BF (KN) | Ø  | B    | H  | E  | L    |
|--------------|-------------|---------|----|------|----|----|------|
| SLR-423-3/16 | 0.16        | 4.5     | 18 | 43.5 | 19 | 18 | 92.5 |
|              |             |         |    |      |    |    |      |
|              |             |         |    |      |    |    |      |

## COMMERCIAL HOOKS

### 普通拖钩和绑钩系列

- ◆ Forged carbon steel-Quenched and tempered
- ◇ 优质碳钢锻造，经过热处理
- ◆ Surface finish: Galvanized
- ◇ 表面处理：电镀白锌
- ◆ Only for lashing or pulling. Never to be used for lifting
- ◇ 仅用于捆绑或则拖拉，绝不能用于起重



#### SLR461-TOW HOOK

锻造保险钩

SLR461


| TIEM CODE<br>货号 | WEIGHT (Kg) | B.L (T) | Φ ±1 | B ±2 | E ±2 | L ±3 |
|-----------------|-------------|---------|------|------|------|------|
| SLR461-LATCH    | 0.31        | 3       | 21   | 77   | 19   | 115  |
| SLR461-WIRE     | 0.31        | 3       | 21   | 77   | 23   | 115  |

Regular mark ( 常规标记以SLR461-5/16为例 ) : 5/16 SLR+BATCH NUMBER(批号)



## FORGED HOOKS 锻造钩系列

- ◆ Forged carbon steel-Quenched and tempered.
- ◇ 优质碳钢锻造，经过热处理
- ◆ Stainless steel latch set is available
- ◇ 可以供应不锈钢舌片配件
- ◆ Surface finish (表面处理) : ◇ Powder plastified (喷塑)
- ◇ 破断拉力为工作拉力的4倍。
- ◆ Colour code (色号) : ◇ Red (红色) RAL3020 ◇ Yellow (黄色) RAL1003



### SLR352-FORGED SNAP HOOK

**SLR352**


锻造简易保险钩

| ITEM NO.     | WEIGHT (KG) | WLL (LBS) | Ø±2 | D±2 | E±2  | B±2 | H±3 | L±3 |
|--------------|-------------|-----------|-----|-----|------|-----|-----|-----|
| SLR-352-9/16 | 0.24        | 1000      | 28  | 8   | 19.5 | 69  | 15  | 123 |

Regular mark (常规标记): 9/16 WLL1000LBS

## DIN HOOK 德标货钩

- ◆ Forged carbon steel-Quenched and tempered.
- ◇ 优质碳钢锻造，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



### SLR357-DIN HOOK

**SLR357**


德标货钩

| ITEM NO.      | WEIGHT (Kg) | WLL (T) | B.L (T) | D ± 1 | E ± 2 | H ± 1.5 | K ± 1.5 | L ± 2 | M ± 1 |
|---------------|-------------|---------|---------|-------|-------|---------|---------|-------|-------|
| SLR-357-250KG | 0.18        | 0.25    | 0.5     | 19    | 16    | 18      | 70      | 96.5  | 13.5  |
| SLR-357-500KG | 0.27        | 0.5     | 1       | 19    | 20    | 21.5    | 80      | 111   | 14    |



## SNAP HOOK 简易保险钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Individually proof test at 2.5 times Working Load Limit
- ◇ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◇ 在1.5倍工作拉力下抽样进行20000次疲劳测试
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



### SLR353-SNAP HOOK

#### 简易保险钩

SLR353

| ITEM NO.    | WEIGHT (kg) | B.L (T) | Ø        | B    | D    | E    | L       |
|-------------|-------------|---------|----------|------|------|------|---------|
| SLR353-0.3T | 0.195       | 1.2     | 19.5±1.5 | 62±2 | 10±1 | 21±2 | 103.5±2 |
| SLR353-7/16 | 0.22        | 2       | 18±1.5   | 61±2 | 7±1  | 18±2 | 102.5±2 |

## TOW HOOK 锻造保险钩

- ◆ Forged carbon steel-Quenched and tempered.
- ◇ 优质碳钢锻造，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



### SLR418-TOW HOOK

#### 锻造保险钩

SLR418

| ITEM NO.       | WEIGHT (kg) | B.L (T) | Ø  | B    | E  | L   |
|----------------|-------------|---------|----|------|----|-----|
| SLR-418-66135# | 0.28        | 3       | 17 | 75.5 | 23 | 110 |
| SLR-418-66136# | 0.22        | 3       | 19 | 59   | 18 | 101 |






## LIFTING TOOLS

### 锻打钢板钩

- ◆ Forged carbon steel.
- ◇ 碳钢锻造而成
- ◆ Quenched and Tempered
- ◇ 经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试



#### SLR624- LIFTING TOOLS

**SLR624**

##### 锻打钢板钩

| ITEM NO.    | WEIGHT (Kg) | WLL (T) | B.L (T) | A ± 1.5 | B ± 3 | D ± 1 | H ± 3 | L ± 3 |
|-------------|-------------|---------|---------|---------|-------|-------|-------|-------|
| SLR-624-5T  | 9.18        | 5       | 20      | 139     | 53    | 75    | 112.5 | 337.5 |
| SLR-624-10T | 21.8        | 10      | 40      | 205     | 125.5 | 115   | 146   | 435   |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Regular mark (常规标记): WLL5T CE SLR

## EYE HOIST HOOK

### 眼型钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflix crack detection
- ◇ 100% 进行磁粉探伤



#### SLR876-EYE HOIST HOOK

**SLR876**


##### 眼型钩

| ITEM NO. | WEIGHT (kg) | WLL (T) | B.L (T) | A ± 1.5 | B ± 1.5 | E ± 1 | F ± 1 | L ± 2 | M ± 1.5 | Ø ± 1 | Ø' ± 1 |
|----------|-------------|---------|---------|---------|---------|-------|-------|-------|---------|-------|--------|
| 5T       | 1.06        | 5       | 20      | 19      | 25      | 27    | 21.5  | 137   | 78.5    | 19    | 55     |



## LARGE OPENING HOOKS 高强度细筋大开口钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



**SLR044-ALLOY EYE HOOK**  
合金钢无舌眼型大开口钩

**SLR044**

| ITEM NO.              | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | D+1  | E+2 | M±1 | H±1  | R±1 | L±2 |
|-----------------------|----------------|------------|------------|------|-----|-----|------|-----|-----|
| <b>SLR044-6500LBS</b> | 0.42           | 3          | 6          | 20.5 | 46  | 97  | 21.5 | 95  | 126 |

Ultimate load is 2 times the Working Load Limit 破断拉力是工作拉力的2倍  
Regular mark (常规标记) : **WLL2.9T CE**

## MILD STEEL HOOKS 普通低碳钢货钩

- ◆ Forged mild steel
- ◇ 普通低碳钢锻造。
- ◆ Only for lashing or pulling. Never to be used for lifting
- ◇ 仅用于捆绑或则拖拉，绝不能用于起重



**SLR046-AGRICULTURAL HOOK**  
普通农钩

**SLR046**


| ITEM NO.          | WEIGHT<br>(kg) | WLL<br>(T) | $\Phi \pm 0.5$ | B $\pm 1$ | E $\pm 0.6$ | L $\pm 1$ |
|-------------------|----------------|------------|----------------|-----------|-------------|-----------|
| <b>SLR046-50</b>  | 0.04           | 0.4        | 8.5            | 34        | 13          | 56        |
| <b>SLR046-60</b>  | 0.06           | 0.6        | 9.5            | 41        | 16          | 70        |
| <b>SLR046-70</b>  | 0.095          | 1          | 11             | 45.5      | 13          | 80        |
| <b>SLR046-80</b>  | 0.13           | 1.2        | 11             | 54        | 17          | 90        |
| <b>SLR046-90</b>  | 0.196          | 1.8        | 12.5           | 58        | 18          | 102       |
| <b>SLR046-100</b> | 0.3            | 2.4        | 12.8           | 62        | 19          | 114.5     |
| <b>SLR046-120</b> | 0.33           | 2.8        | 15.5           | 62        | 20          | 118       |

Regular mark (常规标记) : 50



## TOW HOOK 拖钩系列

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◇ 100% 进行磁粉探伤



### SLR444-FORGED TOW HOOK

普通拖钩

**SLR444**

| ITEM NO.       | WEIGHT<br>(KG) | Ø1 | Ø2 | M±0.5 | N  | L ± 1 | L ± 1 |
|----------------|----------------|----|----|-------|----|-------|-------|
| <b>SLR-444</b> | 0.34           | 12 | 19 | 54.5  | 30 | 138   | 138   |



### SLR311-FORGED TOW HOOK

合金钢锻造汽车拖钩

**SLR311**

Forged alloy steel, quenched and tempered.

合金钢锻造，进行热处理。

With safety latch. 带安全舌片。

Max load is 10000LBS 最大安全负荷10000LBS

| ITEM NO.         | WEIGH/kg | Maxload  |
|------------------|----------|----------|
| <b>SLR311-1#</b> | 0.72     | 10000lbs |



### SLR311-FORGED HEAVY TOW HOOK

重型锻造汽车拖钩


Forged alloy steel, quenched and tempered.

合金钢锻造，进行热处理。



## TOW HOOK 拖钩系列

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤




### SLR051-FORGED U PART

#### U型卡

**SLR051**

| ITEM NO. | WEIGHT (KG) | A ± 1 | B ± 0.5 | C      | D ± 1 | Ø ± 0.5 | L ± 2 |
|----------|-------------|-------|---------|--------|-------|---------|-------|
| 1#       | 0.11        | 32    | 35      | 5/8-18 | 23    | 12.6    | 63    |
| 2#       | 0.15        | 32    | 14      | 5/8-18 | 23    | 12.6    | 59.5  |

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnafux crack detection
- ◇ 100% 进行磁粉探伤



### SLR681-FORGED TOW HOOK

#### 牵引钩

**SLR681**


| ITEM NO. | WEIGHT (KG) | WLL (T) | B.L (T) | A ± 2 | B ± 2 | H ± 2 | R ± 3 | L ± 3 | Ø ± 2 |
|----------|-------------|---------|---------|-------|-------|-------|-------|-------|-------|
| SLR-681  | 2.4         |         |         | 22    | 40    | 118   | 62    | 242   | 32    |
|          |             |         |         |       |       |       |       |       |       |
|          |             |         |         |       |       |       |       |       |       |
|          |             |         |         |       |       |       |       |       |       |



## LIFTING TOOLS

### 起重吊具系列

- ◆ Large throat opening and small cross area
- ◇ 大开口，小截面，更方便连接和穿入。
- ◆ Forged alloy steel, High strength and good ductility
- ◇ 优质合金钢锻造而成，高强度，韧性好。
- ◆ Only for general hoist, Not for overhead lifting.
- ◇ 仅用于一般起吊，不能用于头上起重作业。
- ◆ Surface finish (表面处理) :
- ◇ Powder coated (喷漆)
- ◆ Colour code (色号) :
- ◇ Red (红色) RAL3020 / Yellow (黄色) RAL1003



#### SLR713-FORGED LIFTING TOOL

水平平衡吊具

**SLR713**

| ITEM NO.          | WEIGHT (KG) | WLL (T) | B.L (T) | M ± 2 | N ± 2 | W ± 2 | Y ± 3 | K ± 3 | L ± 3 |
|-------------------|-------------|---------|---------|-------|-------|-------|-------|-------|-------|
| <b>SLR-713-3T</b> | 7.8         | 3       | 12      | 102   | 66    | 108   | 191   | 195   | 236   |
| <b>SLR-713-5T</b> | 16.42       | 5       | 20      | 130   | 84    | 138   | 249   | 286.5 | 306   |


Ultimate load is 4 times the Working Load Limit 破断拉力是工作拉力的4倍

Regular mark (常规标记) : WLL3T CE

## LIFTING TOOLS

### 起重吊具系列

- ◆ Forged carbon steel.
- ◇ 碳钢锻造而成
- ◆ Quenched and Tempered
- ◇ 经过热处理
- ◆ Breakage test
- ◇ 对每一批次产品进行严格的抽样破断测试



#### SLR646-LIFTING TOOLS

钳座顶块


**SLR646**

| ITEM NO.          | WEIGHT (Kg) | WLL (T) | A ± 1 | B ± 1 | C ± 1 | D ± 0.8 | E ± 0.8 | H ± 1 | Φ ± 0.5 | L ± 2 |
|-------------------|-------------|---------|-------|-------|-------|---------|---------|-------|---------|-------|
| <b>SLR-646-3T</b> | 4.26        | 3       | 80    | 60    | 23    | 39      | 34      | 91    | 43.5    | 167   |



## LARGE OPENING HOOKS 高强度细筋大开口钩

- ◆ Large throat opening and small cross area
- ◇ 大开口，小截面，更方便连接和穿入
- ◆ Forged alloy steel, High strength and good ductility
- ◇ 优质合金钢锻造而成，高强度，韧性好
- ◆ Only for general hoist, Not for overhead lifting
- ◇ 仅用于一般起吊，不能用于头上起重作业。



### SLR207-ALLOY FORGED LARGE OPENING HOOK 合金钢锻造大开口钩

SLR207


| TIEM CODE   | WEIGHT<br>(Kg) | WLL<br>(T) | B.L<br>(T) | D±1 | N±2 | E±2  | B±2   | L1±3  | L2±3 |
|-------------|----------------|------------|------------|-----|-----|------|-------|-------|------|
| SLR207-1T   | 0.44           | 1          | 4          | 10  | 24  | 52.5 | 107.2 | 163.5 | 132  |
| SLR207-1.5T | 1.27           | 1.5        | 3          | 20  | 40  | 99   | 112   | 272   | 230  |

Regular mark (常规标记以SLR207-1.5T为例): 5000B WLL1.5T CE SLR+BATCH NUMBER(批号)



## FORGED SWIVEL HOOK 旋转钩

- ◆ Forged alloy steel or carbon steel.
- ◆ 合金钢或碳钢锻造而成
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
- ◆ 100% 进行磁粉探伤
- ◆ With safety latch
- ◆ 含保险舌片
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Red(红色)RAL3020  
Yellow(黄色)RAL1003
- ◆ Alloy steel:Ultimate load is 4.5 times the Working Load Limit
- ◆ 合金钢货钩: 破断拉力为工作拉力的4.5倍。
- ◆ Carbon steel:Ultimate load is 5 times the Working Load Limit
- ◆ 碳钢货钩: 破断拉力为工作拉力的5倍。
- ◆ Can be Rotated under Non-load Conditions!
- ◆ 非承载条件下可旋转调节方向!



### SLR132-FORGED SWIVEL HOOK 旋转钩

**SLR132**


| ITEM NO.             | WEIGHT<br>(kg) | ALLOY      |            | CARBON     |            | A ±1 | B ±2 | E ±2 | H ±0.6 | K ±4  | L ±5  | M ±1 |
|----------------------|----------------|------------|------------|------------|------------|------|------|------|--------|-------|-------|------|
|                      |                | WLL<br>(T) | B.L<br>(T) | WLL<br>(T) | B.L<br>(T) |      |      |      |        |       |       |      |
| SLR-132-A0.75T/C0.5T | 0.3            | 0.75       | 3.375      | 0.5        | 2.5        | 32   | 22.5 | 17   | 9      | 110   | 137   | 15   |
| SLR-132-A1T/C0.75T   | 0.34           | 1          | 4.5        | 0.75       | 3.75       | 32   | 22.5 | 17   | 9      | 108   | 136   | 16   |
| SLR-132-A1.5T/C1T    | 0.64           | 1.5        | 6.75       | 1          | 5          | 37.5 | 29.5 | 22.5 | 12     | 130   | 163.5 | 17.5 |
| SLR-132-A2T/C1.5T    | 1.05           | 2          | 9          | 1.5        | 7.5        | 42.5 | 33   | 21.5 | 15.8   | 150   | 192   | 21   |
| SLR-132-A3T/C2T      | 1.24           | 3          | 13.5       | 2          | 10         | 42.5 | 33   | 26   | 15.8   | 163   | 209   | 23   |
| SLR-132-A5T/C3T      | 2.3            | 5          | 22.5       | 3          | 15         | 48   | 39   | 32.5 | 18     | 191   | 246   | 33   |
| SLR-132-A7T/C5T      | 4              | 7          | 31.5       | 5          | 25         | 64   | 53   | 43   | 21.5   | 243.5 | 313   | 34   |
| SLR-132-A11T/C7.5T   | 7.09           | 11         | 49.5       | 7.5        | 37.5       | 68   | 53   | 49.5 | 26     | 277   | 364   | 41.5 |
| SLR-132-A15T/C10T    | 12.77          | 15         | 67.5       | 10         | 50         | 79   | 62   | 54.5 | 32     | 332   | 431   | 55.7 |
| SLR-132-A22T/C15T    | 24.5           | 22         | 99         | 15         | 75         | 105  | 108  | 87   | 40     | 427   | 543   | 70   |
| SLR-132-A30T/C20T    | 34.5           | 30         | 135        | 20         | 100        | 105  | 96   | 97.5 | 40     | 465   | 596   | 76.2 |

Regular mark (常规标记): 碳钢: SWLLT CE SLR + BATCH NUMBER (批号);  
合金钢: ALLOY WLLT CE SLR + BATCH NUMBER (批号)。




## FORGED SWIVEL HOOK 锻造旋转钩

- ◆ Forged super alloy steel- Quenched and Tempered
  - ◇ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ Breakage test
  - ◇ 对每一批产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection
  - ◇ 100% 进行磁粉探伤
- ◆ With safety latch
  - ◇ 含保险舌片
- ◆ Surface finish (表面处理): Powder plastified (喷塑)
- ◆ Colour code(色号): Red(红色)RAL3020
- ◆ Alloy steel: Ultimate load is 4.5 times the Working Load Limit
  - ◇ 合金钢货钩: 破断拉力为工作拉力的4.5倍。
- ◆ Carbon steel: Ultimate load is 5 times the Working Load Limit
  - ◇ 碳钢货钩: 破断拉力为工作拉力的5倍。
- ◆ Can be Rotated under Non-load Conditions!
  - ◇ 非承载条件下可旋转调节方向!



NEW! 改进型



SLR554-FORGED SWIVEL HOOK  
旋转钩

SLR554

| ITEM NO.           | WEIGHT<br>(kg) | ALLOY      |            | CARBON     |            | A ±1 | B ±2 | E ±2 | H ±0.6 | K ±4  | L ±5  | M ±1 |
|--------------------|----------------|------------|------------|------------|------------|------|------|------|--------|-------|-------|------|
|                    |                | WLL<br>(T) | B.L<br>(T) | WLL<br>(T) | B.L<br>(T) |      |      |      |        |       |       |      |
| SLR-554-A1T/C0.75T | 0.34           | 1          | 4.5        | 0.75       | 3.75       | 32   | 26.5 | 22   | 9      | 116   | 144   | 16   |
| SLR-554-A1.5T/C1T  | 0.64           | 1.5        | 6.75       | 1          | 5          | 37.5 | 29.5 | 22.5 | 12     | 130   | 163.5 | 17.5 |
| SLR-554-A2T/C1.5T  | 1.02           | 2          | 9          | 1.5        | 7.5        | 44.4 | 33   | 24   | 15.8   | 152   | 193   | 21   |
| SLR-554-A3T/C2T    | 1.24           | 3          | 13.5       | 2          | 10         | 42.5 | 33   | 26   | 15.8   | 163   | 209   | 23   |
| SLR-554-A5T/C3T    | 2.25           | 5          | 22.5       | 3          | 15         | 50   | 39   | 34   | 18     | 191   | 251   | 33   |
| SLR-554-A7T/C5T    | 4              | 7          | 31.5       | 5          | 25         | 64   | 53   | 43   | 21.5   | 243.5 | 313   | 34   |
| SLR-554-A11T/C7.5T | 7.09           | 11         | 49.5       | 7.5        | 37.5       | 70   | 53   | 50   | 26     | 279   | 364   | 41.5 |


Regular mark(常规标记): 碳钢: SWL1T CE SLR+BATCH NUMBER (批号);  
合金钢: ALLOY WLL1T CE SLR+BATCH NUMBER (批号)。





## SWIVEL HOOK 旋转钩

- ◆ Forged super carbon steel- Quenched and Tempered
- ◇ 高强度高韧性特殊碳钢锻造而成，经过热处理
- ◆ 100% magnaflex crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理) :
- ◇ Powder plastified(喷塑)
- ◆ Colour code(色号) :
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003
- ◆ Can be Rotated under Non-load Conditions!
- ◇ 非承载条件下可旋转调节方向!




SLR067-  
LD7785/B 旋转钩钩体

SLR067

| ITEM NO.     | WEIGHT (KG) | WLL (T) | BL (T) | A±1.5 | B±1 | M±2 | E±1  | Ø±1 | L±2.5 |
|--------------|-------------|---------|--------|-------|-----|-----|------|-----|-------|
| SLR-067-1.6T | 1.7         | 1.6     | 8      | 46    | 46  | 92  | 24.8 | 17  | 211   |
| SLR-067-2T   |             | 2       | 10     | 46    | 46  | 100 | 26   | 17  | 223   |

- ◆ Forged super carbon steel- Quenched and Tempered
- ◇ 高强度高韧性特殊碳钢锻造而成，经过热处理
- ◆ 100% magnaflex crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理) :
- ◇ Powder plastified(喷塑)
- ◆ Colour code(色号) :
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003
- ◆ Can be Rotated under Non-load Conditions!
- ◇ 非承载条件下可旋转调节方向!



SLR508-LD2805碳钢旋转钩

SLR508


| ITEM NO. | WEIGHT (KG) | WLL (T) | BL (T) | A±2 | B±2.5 | E±1.5 | C±2 | L±4   |
|----------|-------------|---------|--------|-----|-------|-------|-----|-------|
| 1.6T     | 1.41        | 1.6     | 8      | 46  | 92    | 30    | 46  | 214.5 |



## SWIVEL HOOK

### 旋转货钩

- ◆ Forged alloy steel or carbon steel-Quenched and Tempered
- ◇ 合金钢或碳钢锻造，严格的热处理保证了强度和韧性
- ◆ 100% magnaflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理) :
- ◇ Powder plastified(喷塑)
- ◆ Colour code(色号) :
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003



#### SLR372-SWIVEL HOOK

##### 旋转货钩


**SLR372**

| ITEM NO.            | WEIGHT<br>(KG) | WLL<br>(T) | BL<br>(T) | A      | B    | E      | H      | K       | L     |
|---------------------|----------------|------------|-----------|--------|------|--------|--------|---------|-------|
| <b>SLR-372-0.8T</b> | 0.48           | 0.8        | 4         | 30±1   | 28±2 | 35+1-2 | 10±1   | 123±3   | 151±3 |
| <b>SLR-372-1T</b>   | 0.92           | 1          | 5         | 36±1.5 | 36±3 | 27+1-2 | 14±1   | 147±3.5 | 182±4 |
| <b>SLR-372-2T</b>   | 1.62           | 2          | 10        | 46±2   | 46±3 | 32+2-3 | 17±1.5 | 174±4   | 220±5 |

## SPECIAL 322C SWIVEL HOOK

### 异型 322C 旋转钩

- ◆ Forged alloy steel or carbon steel-Quenched and Tempered
- ◇ 合金钢或碳钢锻造，严格的热处理保证了强度和韧性
- ◆ 100% magnaflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理) :
- ◇ Powder plastified(喷塑)
- ◆ Colour code(色号) :
- ◇ Red(红色) RAL3020 / Yellow(黄色) RAL1003



#### SLR383-SPECIAL 322C SWIVEL HOOK

##### 异型 322C 旋转钩


**SLR383**

| ITEM NO.            | WEIGHT<br>(KG) | WLL (T) |       | A ±1     | B        | C      | E      | L       | K       |
|---------------------|----------------|---------|-------|----------|----------|--------|--------|---------|---------|
|                     |                | CORBON  | ALLOY |          |          |        |        |         |         |
| <b>SLR-383-0.8T</b> | 0.37           | 0.8     | 1.25  | 32 ± 1.5 | 27.5 ± 2 | 50 ± 2 | 23+1-2 | 144 ± 3 | 115 ± 3 |
| <b>SLR-383-1T</b>   | 0.62           | 1       | 1.6   | 38 ± 1.5 | 32 ± 3   | 62 ± 3 | 26+1-2 | 158 ± 3 | 123 ± 3 |
| <b>SLR-383-1.6T</b> | 1.24           | 1.6     | 2.5   | 44.4 ± 2 | 39 ± 3   | 76 ± 3 | 28+2-3 | 195 ± 4 | 153 ± 4 |
| <b>SLR-383-2T</b>   | 1.35           | 2       | 3.2   | 44.4 ± 2 | 39 ± 3   | 76 ± 3 | 30+2-3 | 210 ± 5 | 163 ± 5 |



## SWIVEL HOOK 旋转钩

- ◆ Forged super alloy steel- Quenched and Tempered
- ◆ 高强度高韧性特殊合金钢锻造而成，经过热处理
- ◆ individually proof test at 2.5 times Working Load Limit
- ◆ 逐件按工作拉力的2.5倍进行验证测试
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ 抽样进行20000次疲劳测试
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤
- ◆ Can be Rotated under Non-load Conditions!
- ◆ 非承载条件下可旋转调节方向!



### SLR795-SWIVEL HOIST HOOK


**SLR795**

#### 旋转钩

| ITEM NO.    | WEIGHT<br>(kg) | WLL<br>(T) | B.L<br>(T) | A±1 | B±1 | C±2.5 | M±1 | N±1  | E±1.5 | H±0.5 | L±3   | L1±2.5 |
|-------------|----------------|------------|------------|-----|-----|-------|-----|------|-------|-------|-------|--------|
| 8-SLR795-6  | 0.48           | 1.25       | 5          | 31  | 52  | 28    | 79  | 16.5 | 23.5  | 22    | 152   | 116.5  |
| 8-SLR795-7  | 0.9            | 1.5        | 6          | 38  | 64  | 32    | 84  | 19   | 26.3  | 23    | 182   | 166    |
| 8-SLR795-8  | 0.9            | 2          | 8          | 38  | 64  | 32    | 84  | 19   | 26.3  | 23    | 181   | 166    |
| 8-SLR795-9  | 1.26           | 2.5        | 10         | 47  | 79  | 42    | 93  | 23   | 29    | 27    | 211   | 168    |
| 8-SLR795-10 | 1.52           | 3.2        | 12.6       | 47  | 79  | 40    | 108 | 23   | 27    | 31    | 219.6 | 171    |

## SHANK HOOK & BLOCK HOOK 直杆钩

- ◆ Forged carbon steel-Quenched and tempered
- ◆ 优质碳钢锻造，经过热处理
- ◆ Breakage test
- ◆ 对每一批次产品进行严格的抽样破断测试
- ◆ 100% magnaflux crack detection
- ◆ 100% 进行磁粉探伤



### SLR047-SHANK HOOK

**SLR047**

#### 杆式钩

| TIEM CODE   | WEIGHT<br>(Kg) | WLL<br>(T) | M±1 | B±2 | C±2 | E±2 | L±3 |
|-------------|----------------|------------|-----|-----|-----|-----|-----|
| SLR047-250  | 0.21           | 0.25       | 12  | 65  | 29  | 16  | 105 |
| SLR047-500  | 0.29           | 0.5        | 14  | 69  | 30  | 16  | 109 |
| SLR047-1000 | 0.57           | 1          | 16  | 81  | 33  | 20  | 123 |
| SLR047-2000 | 1.04           | 2          | 20  | 104 | 42  | 24  | 155 |


Regular mark (常规标记以SLR47-250KG为例) : SWL0.25T



## FORGED GRAB HOOK

### 羊角抓钩

- ◆ Forged alloy steel or carbon steel. ◇ 合金钢或碳钢锻造而成
- ◆ Quenched and Tempered ◇ 经过热处理
- ◆ Not for lifting, only for lashing and pulling
- ◇ 不能用于起重, 仅用于捆绑和拖拉
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤
- ◆ G43: Ultimate load is 3 times the Working Load Limit
- ◇ 43级: 极限负荷是工作拉力的3倍
- ◆ G70: Ultimate load is 4 times the Working Load Limit
- ◇ 70级: 极限负荷是工作拉力的4倍



### SLR123-G70 AND G43 CLEVIS GRAB HOOK 70级和43级羊角抓钩

**SLR123**


| ITEM NO.     | WEIGHT<br>(lbs) | WLL (lbs) |       | A ±1 | B ±1.5 | E ±0.5 | H ±1 | K ±1  | L ±2  | M ±2  | N ±1 |
|--------------|-----------------|-----------|-------|------|--------|--------|------|-------|-------|-------|------|
|              |                 | CARBON    | ALLOY |      |        |        |      |       |       |       |      |
| SLR-123-1/4  | 0.36            | 2600      | 3150  | 8.5  | 25     | 9.5    | 19   | 45    | 78.5  | 47.4  | 12.5 |
| SLR-123-5/16 | 0.62            | 3900      | 4700  | 11.5 | 29     | 11.5   | 25   | 54    | 96.5  | 54.5  | 16   |
| SLR-123-3/8  | 1               | 5400      | 6600  | 12.5 | 35     | 12.2   | 31   | 64.5  | 114.5 | 67.5  | 18   |
| SLR-123-7/16 | 1.5             | 7200      | 8750  | 17   | 42     | 14.5   | 33.5 | 70    | 126   | 76.8  | 19   |
| SLR-123-1/2  | 2.22            | 9200      | 11300 | 18.5 | 47     | 17     | 39.5 | 85    | 148.5 | 91    | 20.5 |
| SLR-123-5/8  | 4.41            | 13000     | 15800 | 23   | 56     | 20     | 45   | 102.5 | 177   | 109.5 | 22   |
| SLR-123-3/4  | 6.5             | 20200     | 24700 | 24   | 66.5   | 24     | 54   | 118   | 207.5 | 132.6 | 33.3 |

- Regular mark (常规标记): G43: G43 FORGED 1/4 SLR HIGH TEST+BATCH NUMBER (批号)。  
G70: G70 FORGED 1/4 SLR +BATCH NUMBER (批号)。

## ALLOY CLEVIS GRAB HOOK

### 澳式70级合金钢羊角抓钩

- ◆ Grade 70, only for lashing and pulling. Never to be used for lifting
- ◇ 70级产品, 仅用于捆绑和拖拉。绝不能用于起重!
- ◆ Forged alloy steel - Quenched and Tempered
- ◇ 合金钢锻造, 严格的热处理保证了强度和韧性
- ◆ Suitable for G70 transport chain
- ◇ 配合70级链条使用



### SLR099-G70 ALLOY CLEVIS GRAB HOOK 澳式70级合金钢羊角抓钩

**SLR099**


| ITEM CODE    | WEIGHT<br>(KG) | LC<br>(KG) | B.L<br>(KG) | A ±0.5 | B ±1 | E ±0.5 | L ±1.2 |
|--------------|----------------|------------|-------------|--------|------|--------|--------|
| SLR-099-6mm  | 0.23           | 2300       | 4600        | 9.5    | 26   | 9.5    | 83     |
| SLR-099-8mm  | 0.38           | 3800       | 7600        | 12     | 35   | 12     | 99     |
| SLR-099-10mm | 0.62           | 6000       | 12000       | 13.5   | 36   | 13.5   | 115    |
| SLR-099-13mm | 1.24           | 9000       | 18000       | 18     | 48.5 | 18     | 152    |

LC=LOAD CAPACITY BL=BREAKAGE LOAD BL=LC X 2 TIMES 破断是工作负荷的两倍



## FORGED GRAB HOOK 眼型抓钩

- ◆ Forged alloy steel or carbon steel ◇ 合金钢或碳钢锻造而成
- ◆ Quenched and Tempered
- ◇ 经过热处理
- ◆ Not for lifting, only for lashing and pulling
- ◇ 不能用于起重, 仅用于捆绑和拖拉
- ◆ Breakage test ◇ 对每一批次产品进行严格的抽样破坏测试
- ◆ 100% magnaflux crack detection ◇ 100% 进行磁粉探伤
- ◆ G43: Ultimate load is 3 times the Working Load Limit
- ◇ 43级: 极限负荷是工作拉力的3倍
- ◆ G70: Ultimate load is 4 times the Working Load Limit
- ◇ 70级: 极限负荷是工作拉力的4倍



### SLR125- FORGED GRAB HOOK

眼型抓钩

**SLR125**


| ITEM NO.     | WEIGHT<br>(LBS) | WLL (lbs) |       | K ±1  | H ±1 | Φ ±0.5 | E ±0.5 | L ±2 | M ±2  | N ±1 |
|--------------|-----------------|-----------|-------|-------|------|--------|--------|------|-------|------|
|              |                 | CARBON    | ALLOY |       |      |        |        |      |       |      |
| SLR-125-1/4  | 0.31            | 2600      | 3150  | 51.5  | 18.5 | 13     | 9      | 77   | 46    | 11.5 |
| SLR-125-5/16 | 0.57            | 3900      | 4700  | 57.6  | 23.8 | 14     | 11.5   | 90   | 57.5  | 14.5 |
| SLR-125-3/8  | 0.86            | 5400      | 6600  | 66    | 28.3 | 17     | 13     | 104  | 66    | 17.5 |
| SLR-125-7/16 | 1.22            | 7200      | 8750  | 77    | 33.5 | 19.5   | 15     | 122  | 81    | 19   |
| SLR-125-1/2  | 1.73            | 9200      | 11300 | 85.5  | 37.4 | 22     | 17     | 135  | 90    | 19   |
| SLR-125-5/8  | 3.8             | 13000     | 15800 | 116   | 44.5 | 30     | 21     | 180  | 110.5 | 28   |
| SLR-125-3/4  | 6.61            | 20200     | 24700 | 133.5 | 54.5 | 35     | 25     | 211  | 133.5 | 34   |

- Regular mark (常规标记): G43: G43 FORGED 1/4 SLR HIGH TEST+BATCH NUMBER (批号)  
G70: G70 FORGED 1/4 SLR+BATCH NUMBER (批号)



## CLEVIS SLIP HOOK 羊角滑钩

- ◆ Forged super carbon/alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊碳钢/合金钢锻造而成，经过热处理
- ◆ Not for lifting, only for lashing or pulling
- ◇ 不能用于起重，仅用于捆绑和拖拉
- ◆ 100% magnaflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理): ◇ Powder plastified(喷塑)
- ◆ Colour code(色号): ◇ Red(红色) RAL3020
- ◇ Yellow(黄色) RAL1003



### SLR124-CLEVIS SLIP HOOK


羊角滑钩

SLR124

| ITEM NO.     | WEIGHT (LBS) | WLL (lbs) (4:1) |       | A±2  | B±2  | E±2  | L±3   | N±3  | M±3   |
|--------------|--------------|-----------------|-------|------|------|------|-------|------|-------|
|              |              | CARBON          | ALLOY |      |      |      |       |      |       |
| SLR-124-1/4  | 0.55         | 1950            | 2750  | 10.5 | 27   | 23.5 | 100   | 12.5 | 71    |
| SLR-124-5/16 | 0.82         | 2875            | 4300  | 12   | 33   | 26   | 114   | 14.5 | 74    |
| SLR-124-3/8  | 1.21         | 4000            | 5250  | 14.5 | 39   | 32   | 132.5 | 17.5 | 93.5  |
| SLR-124-7/16 | 2.09         | 5000            | 7000  | 16.5 | 44   | 40   | 147   | 21   | 110.5 |
| SLR-124-1/2  | 2.99         | 6500            | 9000  | 19   | 48   | 42.5 | 166   | 23   | 115   |
| SLR-124-5/8  | 4.85         | 9250            | 13500 | 18.5 | 58.7 | 51   | 200.5 | 28   | 143   |
| SLR-124-3/4  | 11.28        | 12500           | 19250 | 30   | 81   | 64.5 | 257   | 36.6 | 187.5 |

● Regular mark(常规标记): G70: G70 1/4 FORGED G43: G43 HIGH TEST FORGED 1/4

- ◆ Forged super carbon/alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊碳钢/合金钢锻造而成，经过热处理
- ◆ Not for lifting, only for lashing or pulling
- ◇ 不能用于起重，仅用于捆绑和拖拉
- ◆ 100% magnaflux crack detection
- ◇ 100%进行磁粉探伤
- ◆ Surface finish (表面处理): ◇ Powder plastified(喷塑)
- ◆ Colour code(色号): ◇ Red(红色) RAL3020
- ◇ Yellow(黄色) RAL1003



### SLR127-CLEVIS SLIP HOOK

羊角滑钩

SLR127


| ITEM NO.     | WEIGHT (LBS) | WLL (LBS) (4:1) |       | A±2  | B±2  | E±2  | L±3   | M±3   |
|--------------|--------------|-----------------|-------|------|------|------|-------|-------|
|              |              | CARBON          | ALLOY |      |      |      |       |       |
| SLR-127-1/4  | 0.53         | 1950            | 2750  | 11   | 27   | 21.5 | 103   | 70.5  |
| SLR-127-5/16 | 0.77         | 2875            | 4300  | 12.5 | 32   | 26   | 117   | 79    |
| SLR-127-3/8  | 1.26         | 4000            | 5250  | 15   | 38   | 32   | 134   | 93.5  |
| SLR-127-7/16 | 2.25         | 5000            | 7000  | 14.5 | 44   | 39   | 151.5 | 111   |
| SLR-127-1/2  | 3.06         | 6500            | 9000  | 19   | 48   | 37.5 | 168   | 124.5 |
| SLR-127-5/8  | 5.18         | 9250            | 13500 | 18.5 | 58.7 | 46.5 | 200.5 | 143   |
| SLR-127-3/4  | 12.4         | 12500           | 19250 | 30   | 81   | 58   | 256   | 188   |

● Regular mark(常规标记): G70: G70 1/4 FORGED G43: G43 HIGH TEST FORGED 1/4



## ALLOY CLEVIS SLIP HOOK 澳式70级合金钢羊角滑钩

- ◆ Grade 70, only for lashing and pulling. Never to be used for lifting
- ◇ 70级产品, 仅用于捆绑和拖拉。绝不能用于起重!
- ◆ Forged alloy steel - Quenched and Tempered
- ◇ 合金钢锻造, 严格的热处理保证了强度和韧性
- ◆ Suitable for G70 transport chain
- ◇ 配合70级链条使用
- ◆ Regular mark (常规标记): 8MM LC3800KG G70



### SLR100-G70 ALLOY CLEVIS SLIP HOOK

澳式70级合金钢羊角滑钩


SLR100

| ITEM NO.     | WEIGHT (KG) | WLL (T) | B.L (T) | A ± 0.5 | B ± 1 | E ± 1 | M ± 0.5 | L ± 1.2 |
|--------------|-------------|---------|---------|---------|-------|-------|---------|---------|
| SLR-100-6MM  | 0.22        | 2.3     | 4.6     | 9       | 69    | 19    | 12.5    | 99.5    |
| SLR-100-8MM  | 0.36        | 3.8     | 7.6     | 11      | 80    | 26    | 14.5    | 110     |
| SLR-100-10MM | 0.6         | 6       | 12      | 12      | 95    | 30    | 19      | 126.5   |
| SLR-100-13MM | 1.185       | 9       | 18      | 19      | 121.5 | 42.5  | 23      | 167.5   |

LC=LOAD CAPACITY BL=BREAKAGE LOAD BL=LC X 2 TIMES 破断是工作负荷的两倍

## CHAIN HANDLE 链子拉手

- ◆ Forged super alloy steel- Quenched and Tempered
- ◇ 高强度高韧性特殊合金钢锻造而成, 经过热处理



### SLR426-CHAIN HANDLE

链子拉手

SLR426

| ITEM NO.    | WEIGHT (Kg) | A    | Φ   | L   |
|-------------|-------------|------|-----|-----|
| SLR-426-4mm | 0.042       | 9    | 5.5 | 85  |
| SLR-426-5mm | 0.06        | 10   | 7   | 108 |
| SLR-426-6mm | 0.11        | 11   | 7.5 | 125 |
| SLR-426-7mm | 0.115       | 12.5 | 9   | 142 |
| SLR-426-8mm | 0.145       | 13.5 | 10  | 154 |

