




YZS型125 / 32~320 / 80吨四梁铸造桥式起重机

YZS Type 125 / 32~320 / 80t Four-beam Cast Bridge Crane

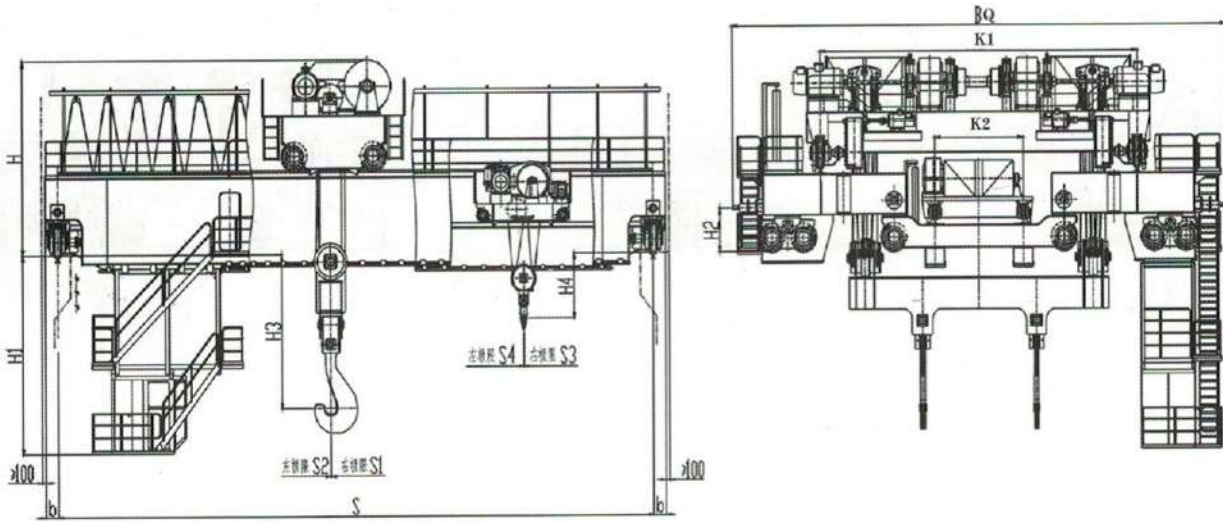


技术参数 Technological parameter

起重量(t) Lifting capacity		125 / 32	140 / 32
工作级别 Working class		A7	A7
跨度 S(m) Span		19	19
起升高度(m) Lifting Height	主钩 Main hook	24	22
	副钩 Auxiliary hook	26	24
速度 Speed	主钩 Main hook	7.6	7.8
	副钩 Auxiliary hook	9.7	9.7
	主小车 Main trolley	38	36
	副小车 Auxiliary trolley	39	37.5
	大车 crane	76	73
主要尺寸 (mm) Dimensions	H	5690	5880
	H ₁	5500	5600
	H ₂	1350	1350
	B ₀	15800	15800
	K ₁	10120	10100
	K ₂	2800	2500
极限尺寸 limt dimension	b	410	450
	H ₃	4200	4350
	H ₄	1300	1500
	S ₁	2200	2300
	S ₂	2000	2000
	S ₃	1500	1500
	S ₄	1500	1600
最大轮压 (KN)Max wheel load		505	535
荐用钢轨 Steel track Recommended		QU120	QU120
电源 Power source		三相交流 380V 50Hz 3-Phase A.C. 380V 50Hz	

YZS型125 / 32~320 / 80吨四梁铸造桥式起重机



YZS Type 125 / 32~320 / 80t Four-beam Cast Bridge Crane

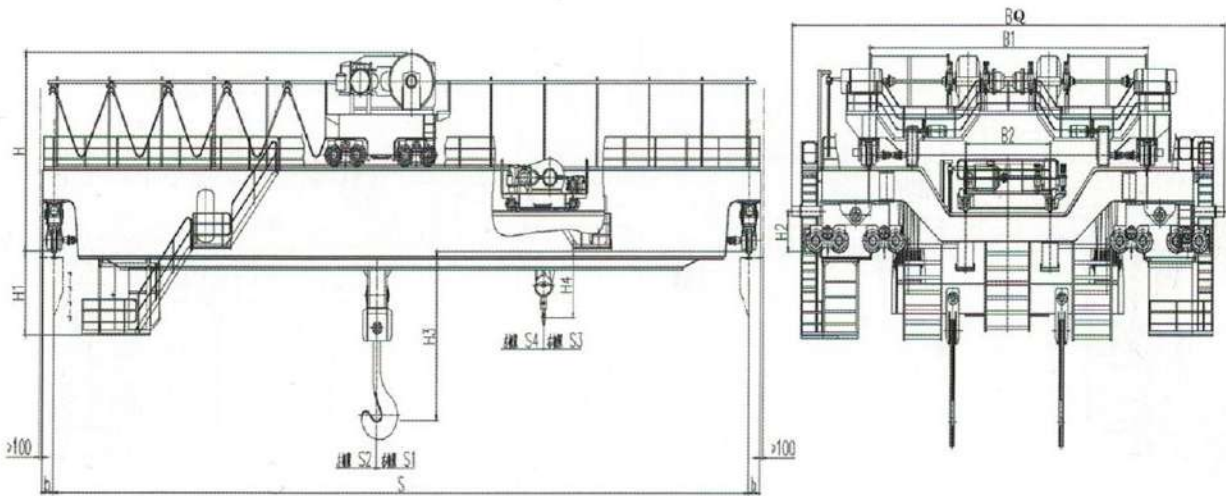


技术参数 Technological parameter

起重量(t) Lifting capacity		160 / 32
工作级别 Working class		A7
跨度 S(m) Span		27
起升高度(m) Lifting Height	主钩 Main hook	25
	副钩 Auxiliary hook	26
速度 Speed	主钩 Main hook	9.8
	副钩 Auxiliary hook	12
	主小车 Main trolley	43.5
	副小车 Auxiliary trolley	43.5
	大车 crane	84
主要尺寸 (mm) Dimensions	H	6350
	H ₁	2700
	H ₂	1250
	B ₀	16800
	B ₁	10800
极限尺寸 limt dimension	B ₂	3300
	b	550
	H ₃	6000
	H ₄	1100
	S ₁	2800
	S ₂	2650
	S ₃	1800
最大轮压 (KN)Max wheel load		485
荐用钢轨 Steel track Recommended		QU120
电源 Power source		三相交流 380V 50Hz 3-Phase A.C. 380V 50HZ



YZS型125 / 32~320 / 80吨四梁铸造桥式起重机

YZS Type 125 / 32~320 / 80t Four-beam Cast Bridge Crane

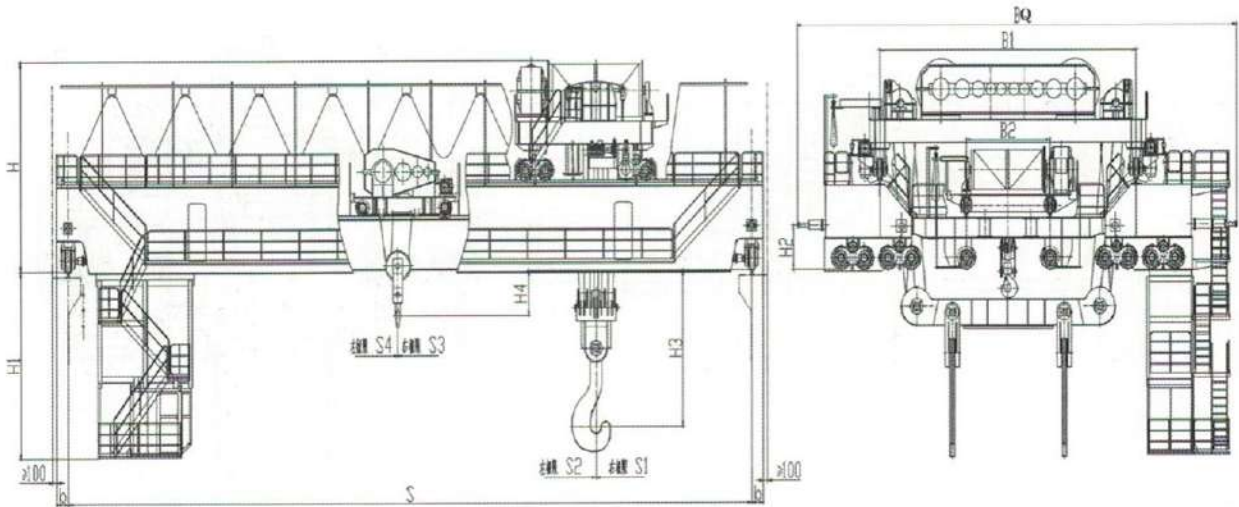


技术参数 Technological parameter

起重量(t) Lifting capacity		180 / 50	200 / 50	225 / 65	240 / 80
工作级别 Working Class		A7	A7	A7	A7
跨度 S(m) Span		28.5	28	27	22
起升高度(m) Lifting Height	主钩 Main hook	27	26	32	25
	副钩 Auxiliary hook	29	26	34	27
速度 Speed	主钩 Main hook	7.5	6	11	7
	副钩 Auxiliary hook	10	10	11	9.6
	主小车 Main trolley	40	41	41	35
	副小车 Auxiliary trolley	38	38	39.5	38
	大车 crane	80	78	84	80
主要尺寸 (mm) Dimensions	H	6850	6900	7000	7000
	H ₁	5860	6000	5990	5650
	H ₂	1350	1650	1400	1350
	B ₀	17500	17000	17300	18500
	B ₁	10500	10000	10100	11250
	B ₂	3500	3200	3300	3800
极限尺寸 limt dimension	b	4500	450	450	450
	H ₃	5500	6000	5800	5500
	H ₄	1200	1000	1000	1500
	S ₁	2450	2600	2500	2800
	S ₂	3000	3000	3000	3200
	S ₃	2000	2000	2200	2400
	S ₄	1600	1600	1600	2800
最大轮压 (KN)Max wheel load		525	530	550	545
荐用钢轨 Steel track Recommended		QU120	QU120	QU120	QU120
电源 Power source		三相交流 380V 50HZ 3-Phase A.C. 380V 50Hz			

YZS型125 / 32~320 / 80吨四梁铸造桥式起重机



YZS Type 125 / 32~320 / 80t Four-beam Cast Bridge Crane

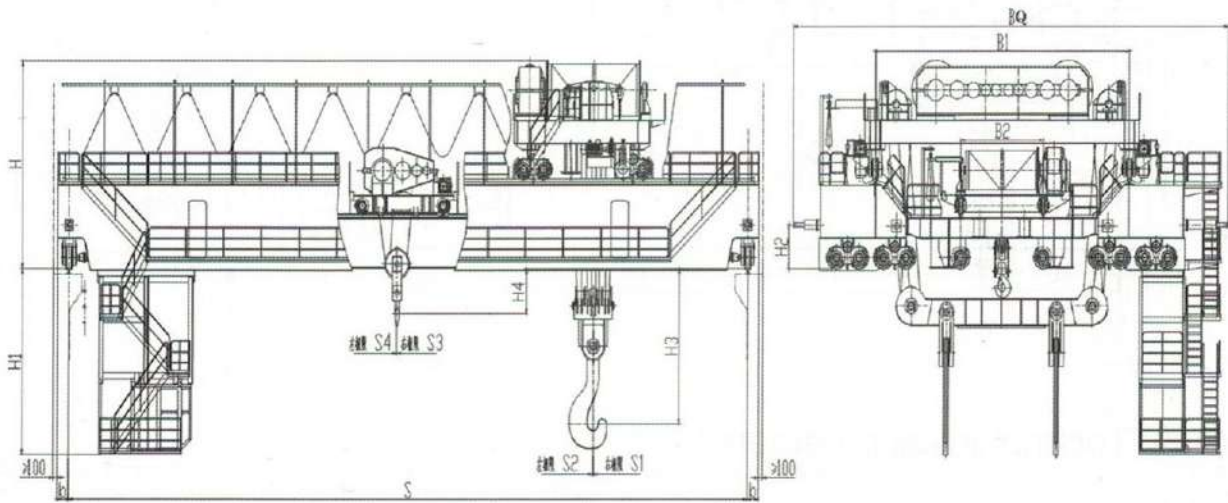

技术参数 Technological parameter

起重量(t) Lifting capacity		280 / 80	320 / 80
工作级别 Working class		A7	A7
跨度 S(m) Span		22	24.5
起升高度(m) Lifting Height	主钩 Main hook	29	28
	副钩 Auxiliary hook	29	32
速度 Speed	主钩 Main hook	12	7.5
	副钩 Auxiliary hook	10	10
	主小车 Main trolley	40	29
	副小车 Auxiliary trolley	40	39
	大车 crane	80	58
主要尺寸 (mm) Dimensions	H	7800	7800
	H ₁	4700	6500
	H ₂	1350	1500
	B ₀	18350	19500
	B ₁	10500	12500
极限尺寸 limit dimension	b	550	550
	H ₃	6000	6000
	H ₄	2000	1700
	S ₁	3200	3300
	S ₂	3500	3500
	S ₃	2400	2600
	S ₄	2800	3000
最大轮压 (KN)Max Wheel Pressure		735	750
荐用钢轨 Steel track Recommended		QU120	QU120
电源 Power source		三相交流 380V 50Hz 3-Phase A.C. 380V 50Hz	